

THE MODEL ENGINEER



IN THIS ISSUE

● THE "LOST WAX" METHOD, OF CASTING ● QUERIES AND REPLIES ● THE STORY OF A SEMI-PORTABLE WORKSHOP ● L.B.S.C.'S CHRISTMAS GIFT FOR THE KIDDIES—A SIMPLE STEAM CRANE ● IN THE WORKSHOP—A JIG-SAW MACHINE

OCTOBER 15th 1953




Vol. 107

No. 2734

9^D

A Workshop in itself!

Just look at the jobs you can tackle with this robust adaptable tool . . . you can use it with Black and Decker accessories and attachments to sand . . . grind . . . buff . . . wax and polish . . . with the addition of a chuck you can also drill to $\frac{1}{4}$ " capacity in steel and double in hardwood. Other uses include polishing cars, furniture, removing old paint, etc., while two useful B & D Utility Stands convert the 5" Sander-Polisher into a versatile drill press or a bench power unit which is ideal for bench grinding, sharpening cutlery, etc. See them all at your local dealers or stores—they are part of the famous B & D Utility range of electric tools.

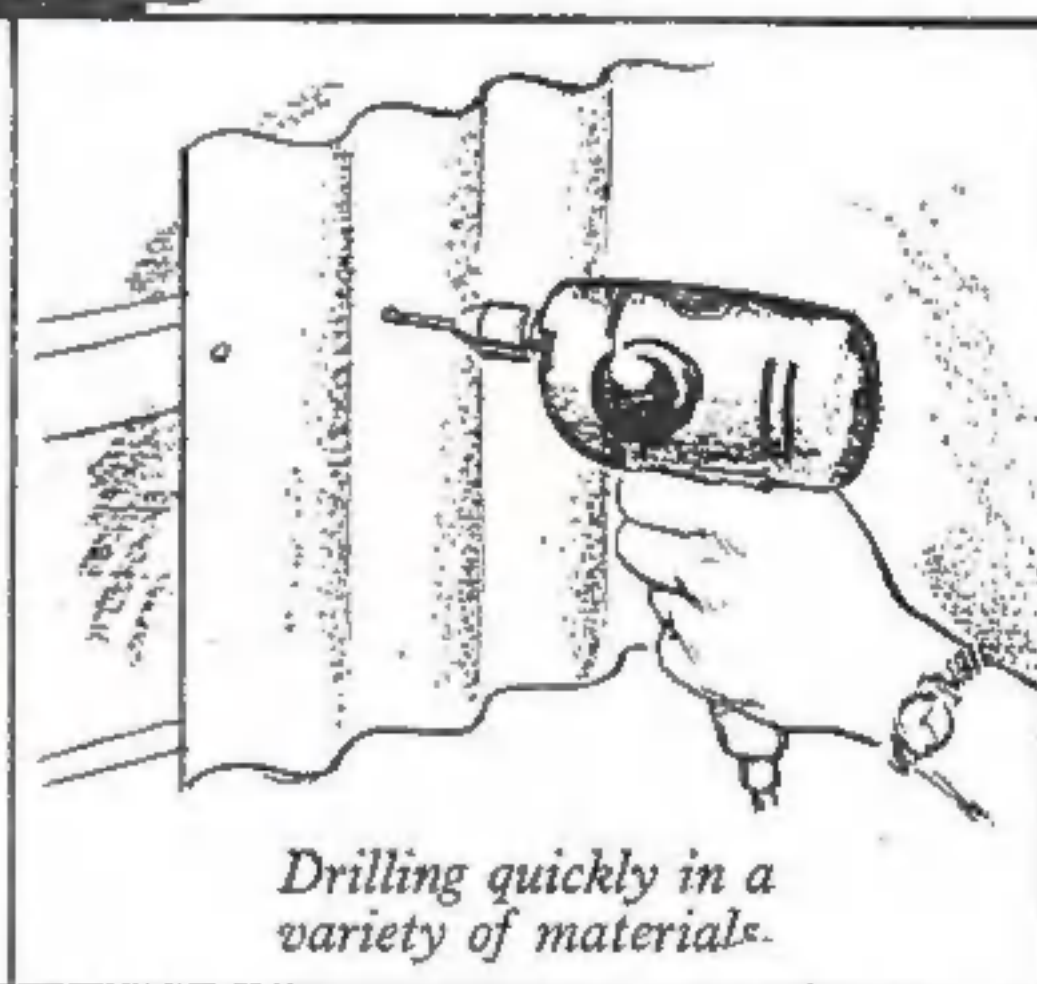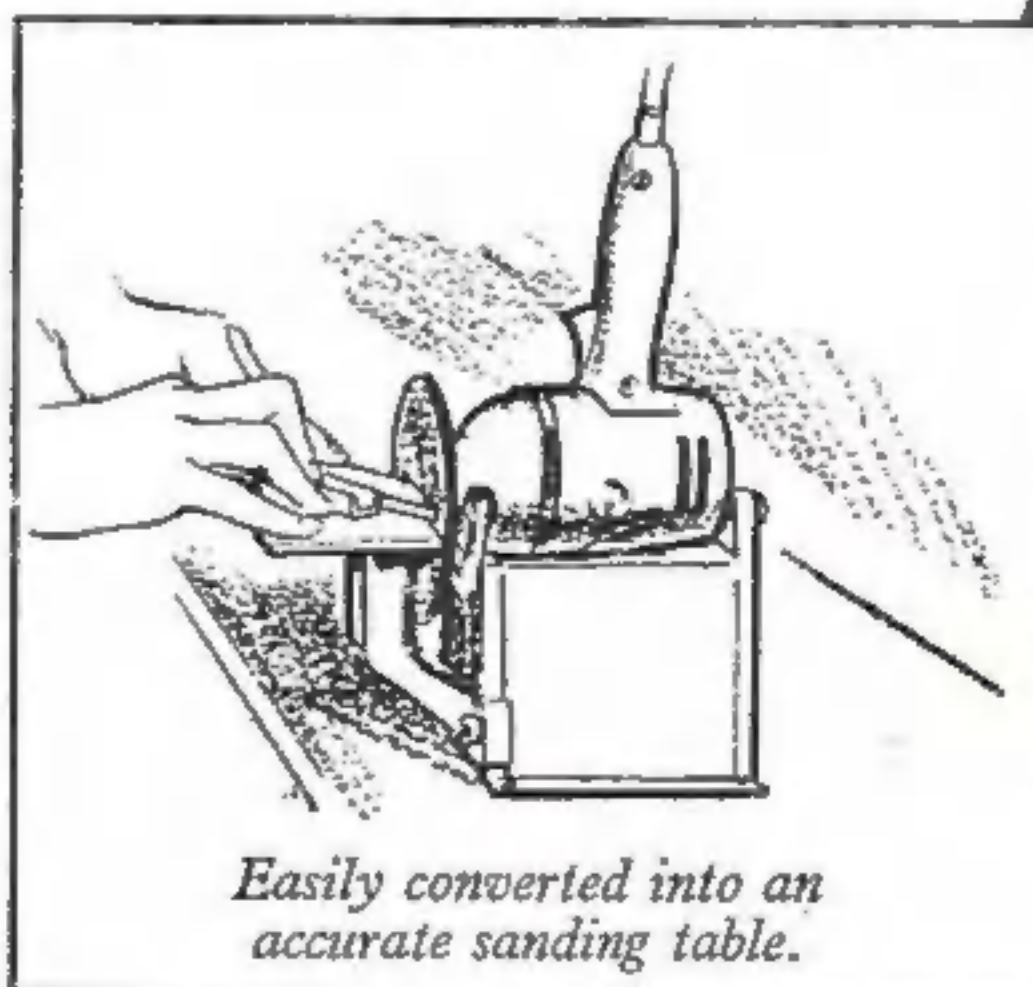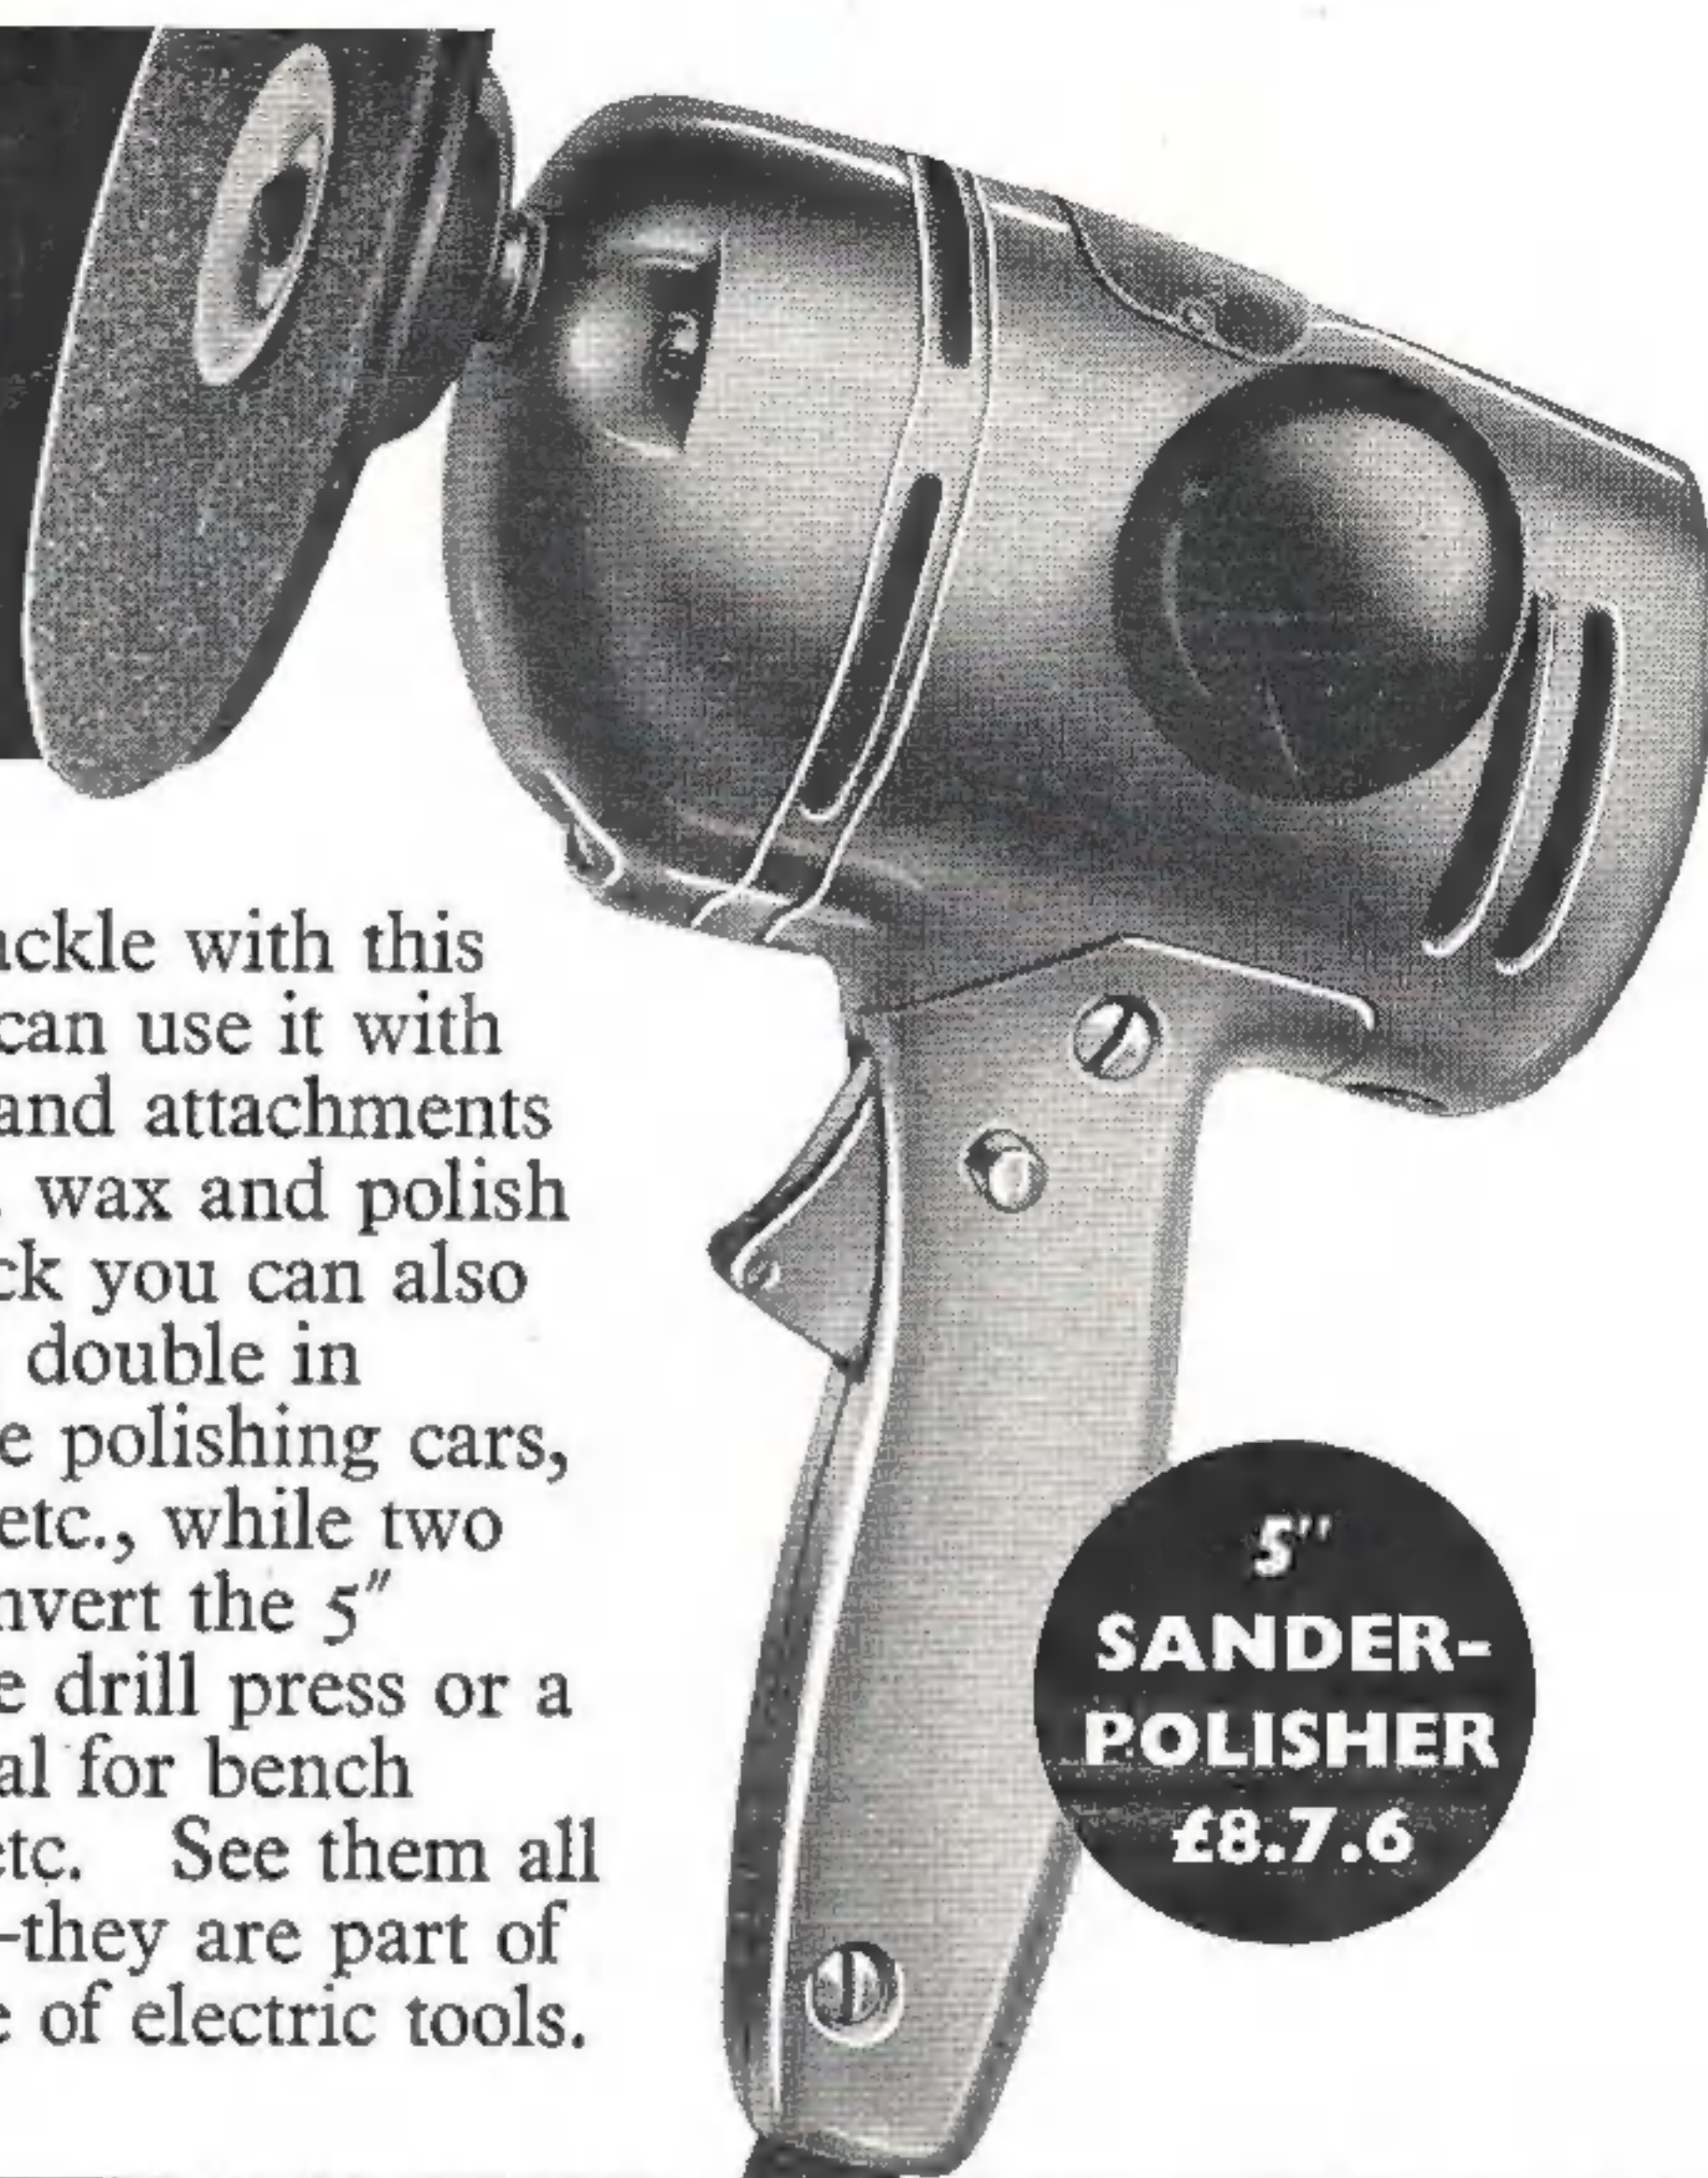

Black & Decker



PORTABLE ELECTRIC TOOLS

Other tools in the B & D Utility range include:—

$\frac{1}{4}$ " DRILL £6.5.0 $\frac{1}{2}$ " DRILL £12.7.6 No. 44 SANDER £12.10.0 6" H.D. ELECTRIC SAW £17.5.0

BLACK & DECKER LIMITED, HARMONDSWORTH, MIDDLESEX


Smee's HUSI

KEENEST PRICES — All Carriage Paid U.K. only

1,500 ft. BEAM FOCUSING TORCH
Highly polished nickel-plate finish, heavy duty, 14 in. long, 5 standard U.2. batteries. Brand new, complete with batteries. 19/11.



EZEE ELECTRIC ARC WELDER

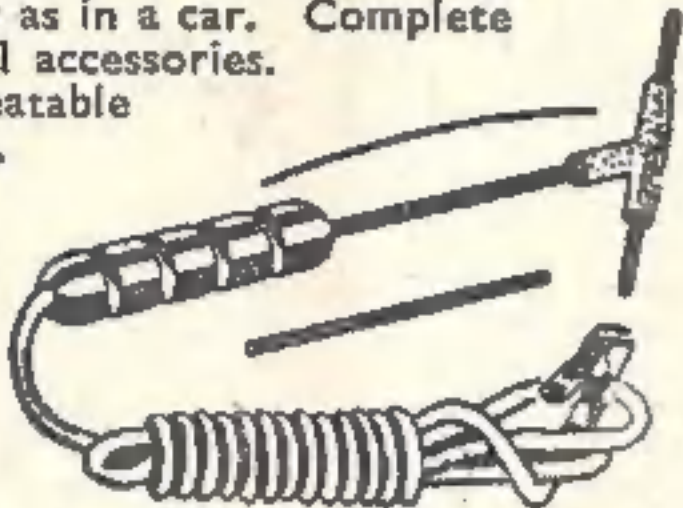Can be used for welding, brazing & soldering from normal 6 or 12 v. battery as in a car. Complete with all accessories. Unrepeatable at 25/-.


For the convenience of Personal Shoppers we have opened a new showroom (address below) where many additional bargains can be seen.

FINEST SHEFFIELD MADE NEW TOOLS, AT GREATLY REDUCED PRICES

22 in. BEECH TRY-PLANE, fitted 2½ in. double iron blade, new, 25/-.


16 in. SKEWBAC SAW. Finest Sheffield made, by leading manufacturers, very best quality, brand new, offered at less than cost, 25/-.

1½ in. RABBIT PLANE. Selected Beech, brand new, 10/-.

LATH HAMMER. Comprising axe, hammer, and nail puller. Brand new, 10/6.

IMPELLER PUMP

Approximately 20 in. long x 2 in. dia. Adjustable flange fixing. 2 A at 24 V d.c. or will work on 12 V at 4 A d.c. Ideal for bilge pumps or for transferring fuel or water to Header Tanks. Pump is self-cooled by liquid passing through it. Brand new and boxed. 39/6 each.

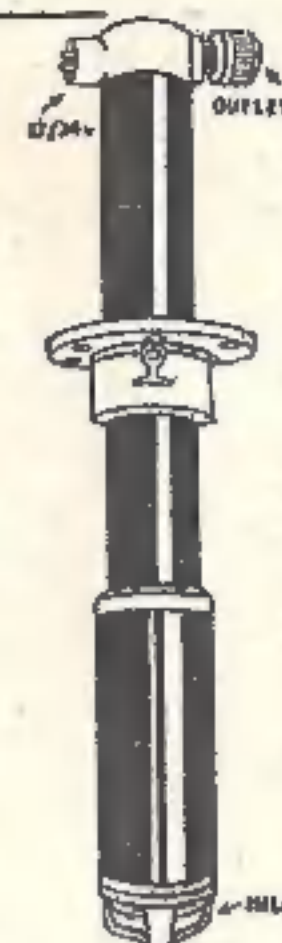


MODEL MAKER'S MAINS TRANSFORMER

All purpose low voltage. Input 210/250 volts. Output 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30 volts. Rating 2 amps. Brand new, fully guaranteed, 24/-.

FLASHER MOTOR UNITS


Containing small 24 V d.c. motor approx. 2½ in. x 1½ in. and Reduction Gear Box, driving cam operated contacts.

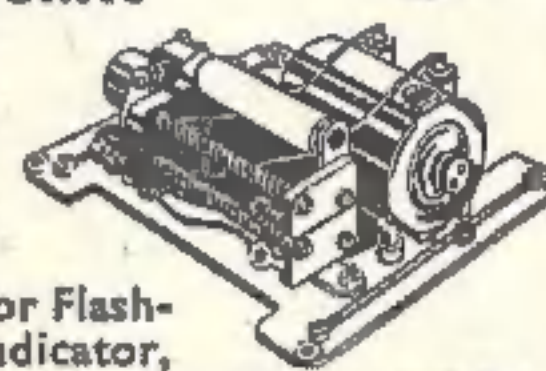

Ideal for Flashing Indicator, Illuminators, etc. Motor and Gear Box useful for all types of models, 25/-.

ACCUMULATOR CUT-OUT


12 or 24 V, 60 A, Ex-R.A.F., originally cost over £6 each, suitable for battery charging, etc. Limited quantity at 15/- each.

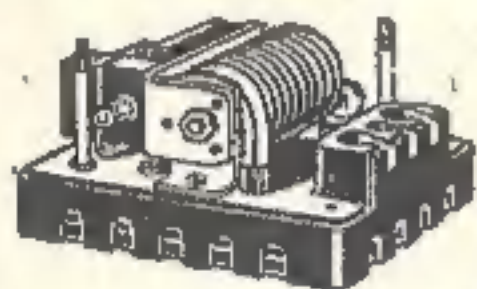


CHART

BOARD

17 in. sq. complete with brass pantograph arm, protractor head and perspex scale. 25/- each.

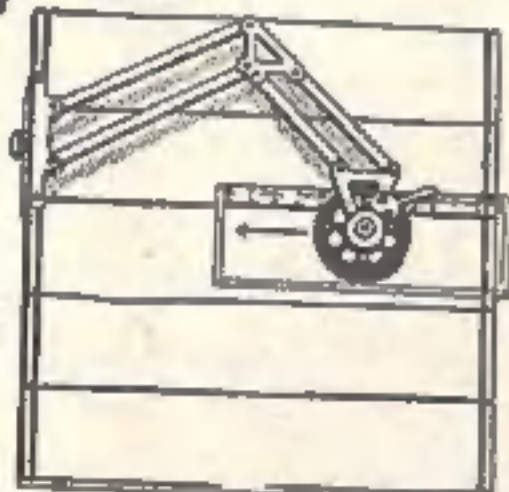

HIGH PRESSURE REDUCING VALVE

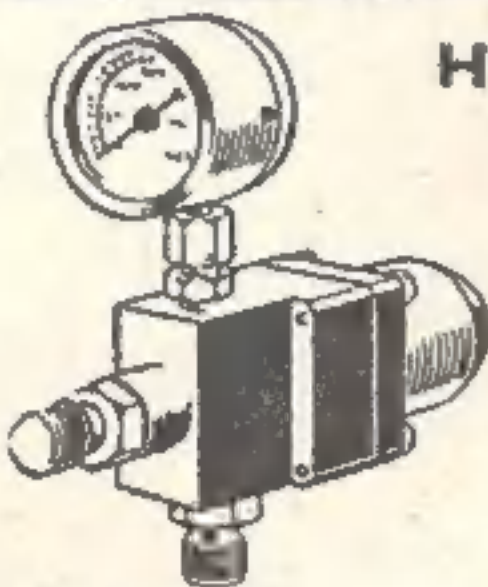

Complete with 0-3,000 lb. per sq. in. pressure gauge. Suitable for Compressors, Cylinders of Gas, etc. Brand new, 8/6.



FLOATING KNIFE

Originally made for use in R.A.F. Dinghies. Cork handle, 4½ in. steel blade, complete with leather sheath and lanyard. Brand new, 5/6.

SHERMAN'S SUPPLY CO. (ME.11)

479 Harrow Road, London, W.10 — CASH WITH ORDER. NO C.O.D.

STANDARD CASTINGS FOR 3½ in. GAUGE LOCOS.

MAIN HORNS. "Molly" type 1/- each. "Maisie" and "Marina" 1/8 each. "Lassie" 1/8. "Britannia" 1/3 each. Our own type 1/6 each.

AXLE BOX MATERIAL. "Molly" type 8/3 bar for six. "Petrolea," "Juliet," etc. 5/- bar for four. "Britannia" 9/6 bar. "Maisie" 5/3 bar. "Marina" 8/- bar.

PUMP BODIES 1/6. PUMPS STAYS 1/6. FRAME STAYS 1/3.

SMOKE BOX RINGS. "Maisie," "Lassie," G.W. 1000, etc., 5/6.

SMOKE BOX DOORS. "Lassie," "Maisie," "Marina," "Iris," G.W. 1000, etc., 4/6 each.

CYLINDER SETS. "Britannia" £2/10/0. "Lassie" P.V. £3/15/0. S.V. £3/10/0. "Doris" £2/15/0. "Schools" £3/10/0. "Marina" £3/0/0. "Maisie" £2/0/0. P.V. Baker £2/15/0. "Juliet" (either type) £1/12/6. "Tich" £1/1/0.

WHEELS. 2½ in. and 2¾ in. bogie 2/- each. 2½ in., 3 in., 3½ in. tender 2/3 each.

DRIVERS. "Tich" 7/-, "Juliet" 11/-, "Petrolea" 16/6. "Molly" 18/-, "Lassie" 22/6. "Marina" £1/0/0. G.W. 1000 £1/1/0. "Britannia" 25/-, "Maisie" 12/6.

Many other types in stock.

Castings for most 5 in. and 2½ in. gauge locomotives in stock.

As we run our own foundry we can give QUICK SERVICE FOR ANY CASTINGS.

BOILERS! May we quote you for finished boilers or materials, flanged plates, etc.


DICK SIMMONDS & CO.

THE 'LIVE STEAM CENTRE
5 SOUTH ROAD, ERITH, KENT

OVER
90%
PER HOUR EFFICIENCY

and savings up to 4/5ths of the size and 5/6ths of the weight in comparison with other storage batteries of similar capacities! The Venner silver-zinc accumulator is ideal for models when minimum weight is essential for high speeds and manoeuvrability.

Write for brochure VA/GH.

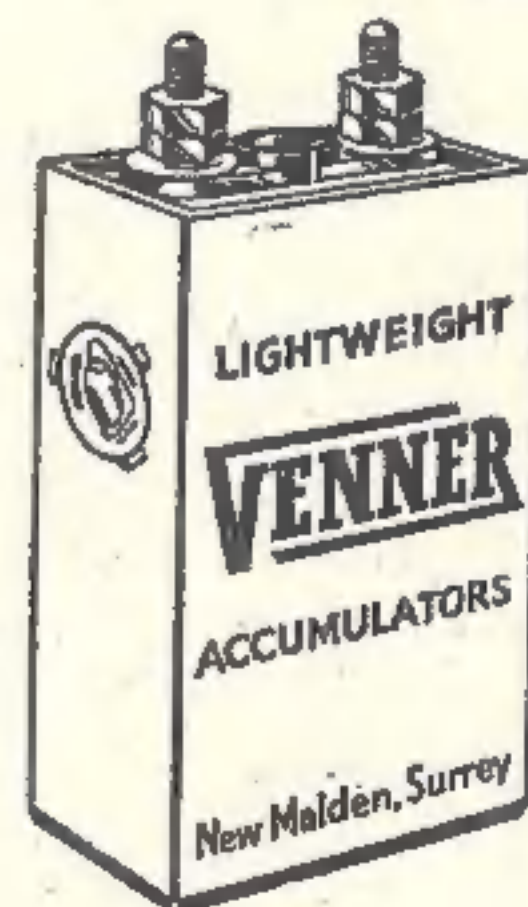

VENNER *Lightweight* ACCUMULATORS

VENNER ACCUMULATORS LTD.,
Kingston By-Pass, New Malden, Surrey
Telephone: MALden 2442



Have You Got The Right Books To Give You THE RIGHT TIME?

Clock Repairing and Adjusting

By W. L. Randell

Written for those who have had no experience of clockwork, as an introduction to a branch of mechanics which becomes more attractive the more it is studied. Only elementary repairs are dealt with, but model engineers will find striking mechanisms, with their many devices, of great appeal. The illustrations show the tools necessary, and various types of mechanisms.

3s. 6d.

Electric Clocks and How to Make Them

By F. Hope-Jones

Of all the mechanical or electro-mechanical devices capable of being produced by the home craftsman with his limited equipment, the electric clock is probably the most fascinating to make and from the utility point of view, the most satisfying to possess. The manufacture of a Synchronome Master Clock is described, and full working instructions enable any competent model engineer to make one of these world famous clocks. Other matters dealt with include the attachment of an electric winding gear to a long case clock, the construction of rolling ball clocks, the making of master chiming gears, and simple striking and chiming mechanisms. Fully illustrated.

10s. 6d.

How to Make an Electric Clock

By R. Barnard Way

A complete description of how to build a clock which is easily within everyone's capabilities. Writing of two clocks he made, the author says. . . "I have two clocks of my own make and the first one ran for 15 months without any adjustment whatever, being checked daily by the broadcast time signals." For those without mains electricity or who are apprehensive of using this type of power, details are given for adapting the mechanism for use with a dry battery.

3s. 6d.

all prices are net

From all booksellers and model shops
or the publishers

Percival Marshall & Co. Ltd.

19/20, Noel Street, London, W.1.

"No Quantity Too Small" BRASS, COPPER, BRONZE, ALUMINIUM, LIGHT ALLOYS IN

Rod, Bar, Sheet, Tube, Strip, Wire,
Angle, Channel, Tee.

H. ROLLET & CO. LTD.

6, Chesham Place, London, S.W.1
SLOane 3463

Works:

32-36, Rosebery Avenue, London, E.C.1

BRANCHES AT

Liverpool

Manchester

Birmingham

Leeds

Ex.-AIR MINISTRY WRAY PRISMATIC BINOCULARS.
6 x 30 eyepiece focussing. Guaranteed condition. Complete in web case. Price, £7 19s. 6d. Leather case if desired, 10s. extra.

Ex.-GOVT. BARR & STROUD RANGEFINDERS. 80 cm. base. Original cost approximately £100. Perfect condition, £12.

Ex.-R.A.F. MARCHING COMPASSES. As new, £1 1s.

OPTICAL KIT for simple Astronomical Telescope, 9s. 6d.

EPISCOPAL LENS with constructional diagram, 12s. 6d.

New illustrated catalogue on request. Satisfaction guaranteed or full refund of payment.

CHARLES FRANK

67-73, SALTMARKET, GLASGOW, C.I.

Phone: Bell 2106-7.

The World's Greatest Bookshop

FOYLES
FOR BOOKS

All new Books available on day of publication.
Secondhand and rare Books on every subject.
Stock of over three million volumes.

Foyles have depts. for Technical Books, Music,
Handicraft Materials, Stationery, Records.
We BUY Books, Coins, Stamps.

119-125 CHARING CROSS RD., LONDON, W.C.2.

Gerrard 5660 (16 lines) ★ Open 9-6 (inc. Sats.)

Nearest Station: Tottenham Court Road.

WATSON'S Special Bargain Offers

MOTOR GENERATORS. Type 107 unused, input 24 V; output 300 and 150 V, suitable as motors also, 9/6. Post 1/10.

ADJUSTABLE SPANNERS. 4 in., new 3/6. Slightly used 2/3.

VIBRATION ABSORBING MOUNTINGS. Steel frame 18 in. x 8 in., with four rubber steel feet, 3/6. Post 1/8.

POCKET SPIRIT LEVELS. 2½ in. in moulded case with protective cover, 1/6. PRISMS 1 in. face optically worked, 3/6. Post 6d.

H.F. AMMETERS. FGX2 dual range 0.20/0 10 thermo coupled, 15/6.

VOLT METERS. 0.25 moving coil 10/6. Post 9d.

A.C. 130/3/50 MOTORS. Totally enclosed 0.6 h.p., 940 r.p.m. Unused 57/6, d.c. 80 V. 3/16 h.p., 29/6. Carriage 3/6.

TRANSMITTING MICROPHONES. Ex-R.A.F. unused G.P.O. pattern with 5 ft. wire and plug, 8/6. Post 1/10.

FLEXIBLE LEADS. 20 ft. length four conductors T.R.S., 3/- each, four for 10/-. COAXIAL CABLE Impedance 52 ohms 1/- yd.

ASTRO COMPASS. Precision observation instruments, optical sight four scales, two spirit levels, in transit case, 8/6. Post 1/10.

Hundreds of other bargains available. Send stamp for list.

EASTERN MOTORS, ALDEBURGH, SUFFOLK. Phone 51.

October 15, 1953

THE
MODEL ENGINEER

Electradix for Satisfaction

RECTIFIER UNITS. Westinghouse, 110 volts, $\frac{1}{2}$ amp, in metal case, fine and coarse controls, 230/250 volt input £7, carr. extra. Westinghouse, 50 volts, $\frac{1}{2}$ amp, in metal case, £5 10s. 50 volts, $\frac{1}{2}$ amp, £4 10s. carr. extra, send for rectifier list.

HAND MAGNETO GENERATORS. P.M. steel magnets wound armature driven by gearing in handle, output approximately, 70 volts 25 M.A., 12/6, post 1/6. Larger 4 magnet type enclosed in wood box with external terminals output approx. 50 M.A., 15/-, post 2/-.
CIRCULAR MAGNETO BELLS with coils under gong for operation from A.C. mains through transformer, 2/6, post 9d.

G.P.O. TELEPHONE PARTS make up your own house 'phone. Polished wood box for wall mounting 8 in. x 6 in. x 3 in. with carbon Mike in bakelite case mounted on front, switch hook at side; fitted inside the box are the switch-hook contacts, Mike transformer, condenser, magneto bell and connection strip, 10/-. G.P.O. long magnet bell receiver with cord 3/6. Hand mag. generator, 12/6, wiring diagram supplied.

TRANSFORMER. 230 volts, 50 cycles, input 12 volts, 8 amps output, 30/-, post 2/6. 18 volts, 3 amps, 30/-, post 2/6. Few only 12 volts, 3 amps, 21/-, post 2/-.
Motors, 24 volts d.c., totally enclosed, approx. 1/30 h.p., new, for working models, will run from 230 volts, A.C. through transformers 230/50 volts, beautifully made, ex-W.D. stock, 12/6, post 2/- 50 volt A.C. motor, 1/25 h.p. with governor on shaft, 15/-, post 2/-.
SOLENOID COILS. 27 Gauge enamelled wire, excellent as H.F. smoothing filter chokes, new and boxed, 2/3 each, 3/9 pair, post 6d
DYNAMOS. 14/32 volt, 9 amp, shunt wound, by G.E.C. and Lancashire dynamos, £1 10s., carr. 5/-.

MAGNETS. D.C. electro magnets twin coil weight 10 ozs., lift 4 lb., 5/-, post 6d. Flat bar magnets, 28 in. x $\frac{1}{2}$ in. x $\frac{1}{2}$ in. thick, 2/- pair. Write for magnet leaflet.

GEAR BOXES. Right-hand cross drive 17/1, die cast with plastic pulley, 3/6, post 6d.

SWITCHES. On-off rotary type enclosed with bakelite knob, 5 amps, 2/6, post 6d. Dewar key switches, 3/6 each, post 6d. New toggle on-off switches, 1/6, post 3d.

RESISTANCES Wire wound resistances twin tubular type 100 ohms, 1 amp with potential divider type resistance attached 1,600 ohms, with tapings, 50 ohms 50 ohms, 700 ohms and 800 ohms, connections wired to paxolin panel fitted, 21/-, post 2/-.
ELECTRADIX RADIOS
Dept. D. 214, Queenstown Road, Battersea, London, S.W.8
Telephone: MACaulay 2159

REFRIGERATION FOR THE HOME CONSTRUCTOR

We are the original specialists

Our components are of the finest quality and are designed exclusively for domestic installations. We do not sell unsuitable scrapped deep freeze ice cream components, and do not wish to be associated with these parts. Our aim is to enable you to build a really efficient refrigerator which will give you correct results and every satisfaction.

Send stamped addressed envelope for our 16-page free list and hints booklet.

BRAID BROS.,

50, Birchwood Avenue, Hackbridge, Surrey


IF YOU ARE INTERESTED

in Aircraft, Railways, Ships, Radio-Control Units, etc. We can supply all your needs in books, plans, castings, materials, etc.

Myford, Zyto, E.W., Flexispeed, Super Adept, Wakefield lathes, Fobco drills, Perfecto shapers, Target milling attachments, Burnerd chucks, Kents angle-plates, etc. from stock.

Caley universal cutting oil	2/- post 8d.
Caley lathe oil	2/- "
Caley super diesel fuel (ready mixed)	2/6 "
Pattern making	...	Casting	...
		Machining	...

No Catalogue meantime S.A.E. enquiries please

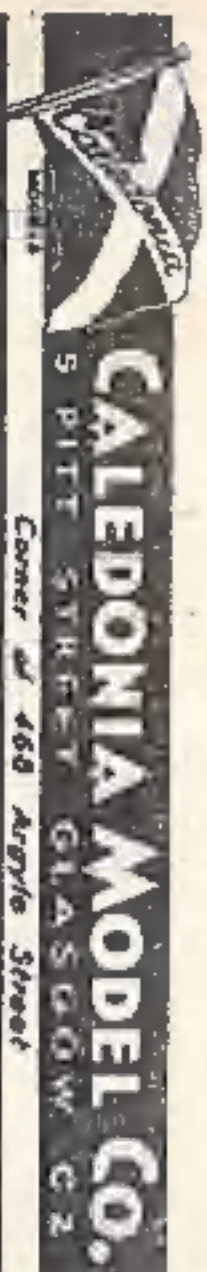

CALEDONIA MODEL CO.
5 PITT STREET GLASGOW G2
Corner of 468 Argyle Street

A FEW OF THE MANY ITEMS

listed in our comprehensive illustrated catalogue. Send a 1/- stamp or P.O. NOW for your copy.

REEVESCO SMALL MACHINE VICES. Vice-bolt slots arranged to suit Tee-slots on most popular lathes and vertical-slides, 17/6 each. Post and packing 1/- extra.

REEVESCO DOUBLE ENDED SLIDING TAILSTOCK DIEHOLDERS for 13/16 in. and 1 in. o.d. button dies. With No. 1 or No. 2 M.T. shank. Price 14/6 each. Post and packing 1/- extra.

BULLFINCH SELF BLOWING GAS TORCHES connects to the town gas supply. Price 65/- each. FOR USE WITH BOTTLED GAS price 55/- each. Post paid.

SET OF H.S. NUMBER DRILLS 1 to 60 with stand, 86/- 5 B.A. SCREWED COPPER ROD in one ft. lengths, 9d. ft. BOILER STAYS. 5 B.A. copper rod screwed 9/16 in. 9d. doz.

TYLER "MARVEL" 7 in. BANDSAW with spiral and flat blades and blade guides. Motorised a.c., single-phase, £33. Deposit £8 5s. 0d. and 12 monthly payments 45/5.

BURNERD LATHE CHUCKS for direct fitting MYFORD M.L.7 lathes (no backplate required). 4 in. 3-jaw G.S. £7 19s. 3d. Deposit 40/3 and 12 monthly payments 10/11. 6 in. 4-jaw Ind. £6 5s. 0d. Deposit 32/- and 12 monthly payments 8/7. Post paid.

Post extra unless otherwise stated. All goods sent out fully insured against loss or damage in transit. OVERSEAS ORDERS under the personal supervision of our Export Manager. CORRECT DOCUMENTATION ASSURED.

A. J. REEVES & CO

416, MOSELEY ROAD, BIRMINGHAM, 12

Grams: "Reevesco, Birmingham"

Phone: Calthorpe 2554

"The choice of experience"

ATTENTION! MODEL ENGINEERS!

Join the thousands of satisfied "BRITINOL" Blow-lamp users!

This remarkable yet simple-to-operate Blow-lamp burns methylated spirit, gives a 3-4 in. intensely hot flame which will heat a small soldering iron in under a minute, or can be employed direct on the finest work.

Price 7/-

Also "Britinol" Complete Soldering Outfits, Telescopic Soldering Irons, acid-free Paste and Cored Wire Solder. From Tool-dealers and Model Shops. Manufactured only by :-

BI-METALS (BRITINOL) LTD.,

ST. MARY'S WORKS, BRIDGE ROAD, LONDON, N.9.

Send for illustrated leaflet



"PERFECTO"

5 in.

STROKE SHAPER

10 in. CROSS TRAVERSE

ALL FEEDS GRADUATED


Price £15 17s. 6d.

Auto Traverse £2 extra

Power attachment available

VICE 25s.

Carriage extra. SUPPLIED BY TOOL DEALERS OR S.A.E. FOR LIST TO

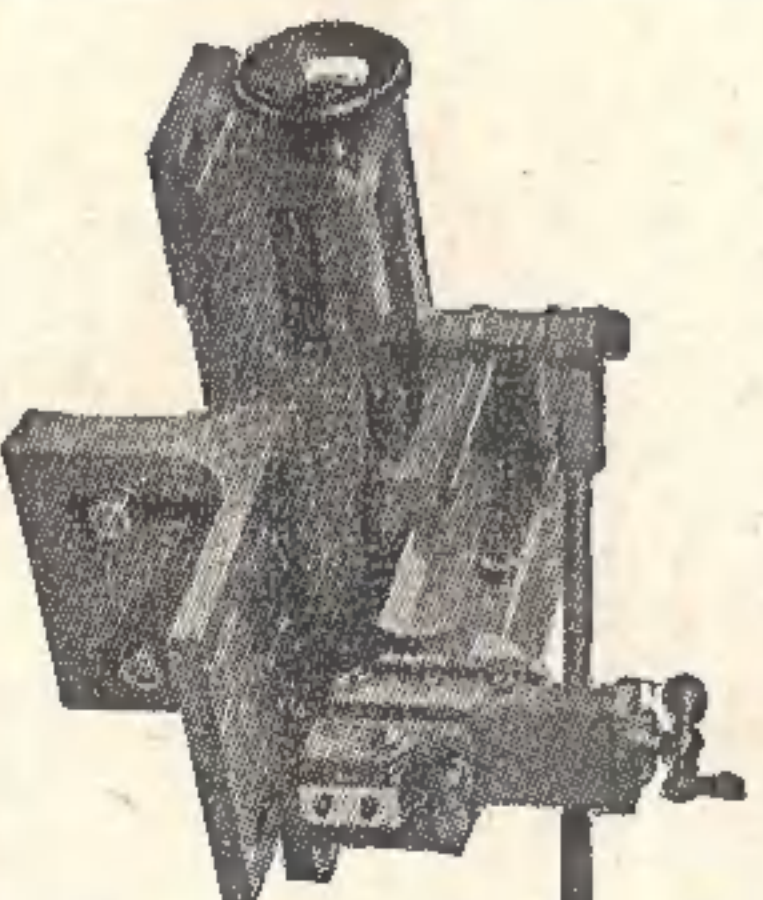

PERFECTO ENGINEERING CO. (Machine Tools)
60, STANLEY STREET, LEICESTER. Phone: 20078

"I DON'T LIKE HIRE PURCHASE"

Even with the fairest and most attractive Personal Hire Purchase Plan in the world we do run up against this attitude occasionally. In such cases THE GARNER GUILD has been proved by hundreds of customers to be the complete answer.

Briefly the Garner Guild is a TOOL CLUB into which you can pay against known (any items gladly reserved) or potential requirements as and how you will. The routine is simplicity itself and there are no agreements to sign and no administrative charges.

Advantages it has none except to assist shallow pockets to cope with more ambitious projects without liability.

WRITE FOR DETAILS TODAY

For "MYFORD" it is GARNER'S without question




BUYING NEW
EQUIPMENT?
Consult our BUY-
ER'S GUIDE
1s. post free
(returnable
against purchase).



HAND & MACHINE TOOL DIVISION • PRIMROSE HILL • BARNSELY
'Phone BARNSELY 2908 'Grams GARNER 2908 BARNSELY

Skyleada

MODEL AIRCRAFT CONSTRUCTION KITS

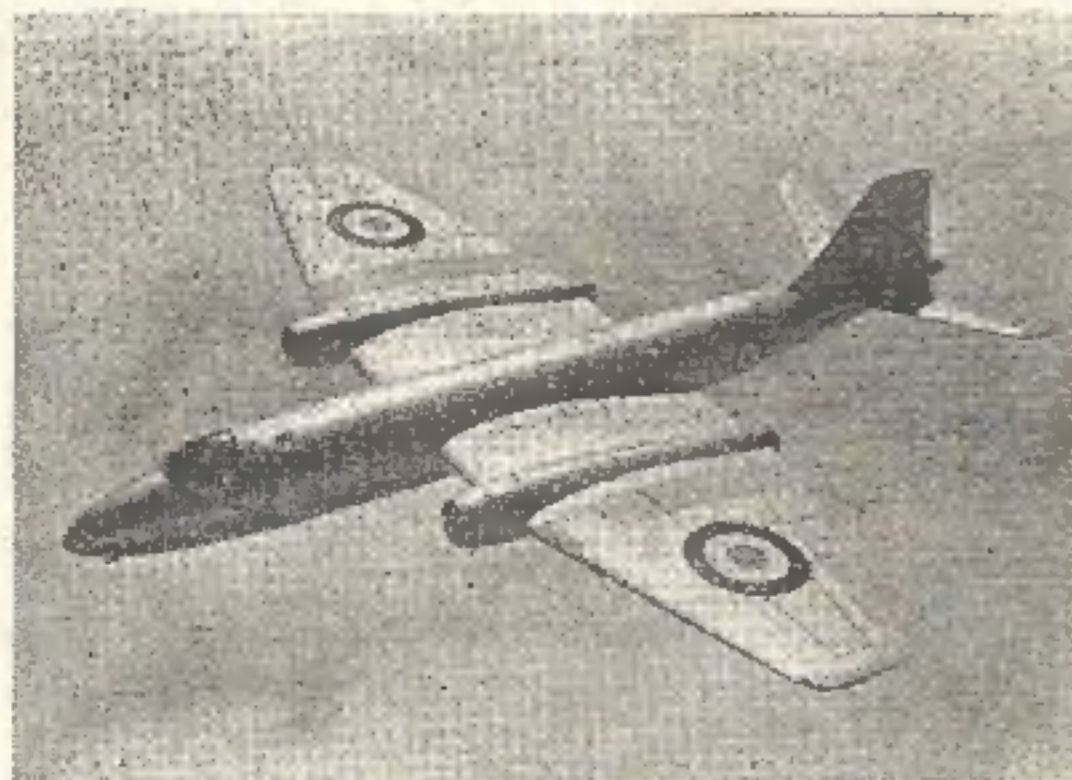

● Another sensational addition to the Jet series
24 in. Span Flying Scale

CANBERRA JETBOMBER

RETAIL PRICE 8s. 6d. inc. P.T.

Designed for one Jetmaster or one Jetex 100 unit. A truly magnificent flying scale model of the famous British jet bomber.

If you are interested in other flying scale models ask your local model shop to show you the complete Skyleada range or send 2½d. stamp for the exciting new illustrated leaflet to :-

Dept. M.E.

**BRITISH MODEL AIRCRAFT
MFG. CO. LTD.**

180, LONDON ROAD, MITCHAM, SURREY.



Eclipse MARKING OUT TOOLS

There's value for money in 'Eclipse' Scribes, Surface Gauges and Centre Punches because of their high quality. Each tool is the best of its clan, designed for the job and made to last. See them at your dealers.

Made by James Neill & Co. (Sheffield) Ltd.
and obtainable from your usual suppliers.

MOT.3

Just
the
tool
for
your
workshop

Suspension and bench
models 1/15 to 1/6 h.p.
with choice of working
attachments.

Model illus. is 1/10th h.p.
with foot speed control,
flexible shaft and 1/8-in.
chuck for drills, polishers,
etc.

Price
£9. 10. 0

The
SEWTRIC
variable speed, combined
**GRINDER, POLISHER
and DRILL**

Sold by all good dealers.

Please write for prices and illustrated list of models.
(Dept. M.E.) **SEWTRIC LTD.**, Sewtric House, Honeypot Lane,
Stanmore, Middlesex. Telephone: EDGware 5261/2/3.

THE MODEL ENGINEER

ESTABLISHED 1898

PERCIVAL MARSHALL & CO. LTD. 19-20 NOEL STREET · LONDON · W.1

SMOKE RINGS

Doncaster was 204 minutes, which included a stop at Peterborough so since her tender is not fitted with water pick-up; there were some severe p.w. checks en route, but the two engines easily kept within schedule on each stage of the journey and arrived at Doncaster nearly three minutes early.

For the return trip, the engine was A4 Pacific, *Silver Link*, on each date. On September 20th, she was allowed 150 minutes for the 156 miles, but had no difficulty in completing the run in just 146 minutes. The great thrill was a maximum speed of 96 m.p.h. when descending the long 10-mile bank from Stoke to Tallington; in fact, it was over the 105 miles from Grantham to London that the engine recovered 2½ minutes arrears of time and gained another 1½ minutes. Good going, indeed!

Models in Industry

IN AN article on the above subject, in the October issue of *Art and Industry*, some pertinent remarks are made regarding the value of models, not only as an aid to sales and publicity, but also in experimental work and pre-production planning. Although the great majority of our readers are amateurs who build models purely for the love of it, we think they will be interested in the appreciation of their skill and usefulness shown in the following extracts, which are quoted verbatim:—

"A good model, of whatever type or subject, is invariably considered to be a work of art. The materials used in its construction may be worthless, but the skill employed in its fabrication sends a message to all who behold it, over and above its primary purpose. . . . The craftsman in this age of machinery is rapidly dying out—but the model-maker at least remains. British industry could with advantage utilise, far more than it does, the skill of the model-making craftsman."

Models Lead the Way

IT is well known that most ship-builders, before embarking on the construction of full-size craft, almost invariably build models, not only for towing tests and other experimental purposes, but also to give prospective customers an idea of the appearance of the finished vessels. The idea of a free-lance amateur-constructed model providing inspiration for a full-size boat, however, may surprise some of our readers. A visitor to this year's "M.E." Exhibition, who was planning to have a full-size cabin cruiser built, became very interested in some of the model boats exhibited, and in particular, one on the Model Power Boat Association stand, which so impressed him that he requested facilities for obtaining photographs and other particulars of this model. Needless to say, these were readily given, and the naval architect in charge of his work has been instructed to base his plans on this information. While this story certainly makes news, it is not by any means unique, and we know of several instances where amateur-built models have led the way to new developments in the design of full-size engineering and shipbuilding projects. Which provides us with yet another answer to the oft-repeated question: "What good is model engineering?"

"The Plant Centenarian"

THIS SPECIAL train, which made two runs, headed by the two Great Northern Railway Atlantic locomotives Nos. 990 and 251, in September was very well patronised and was a great success. The two old engines which were specially brought out of retirement and put into good running order for the occasion, looked resplendent in their bright green paint and created a great deal of interest all along the route from Kings Cross to Doncaster on September 20th, and in the reverse direction a week later.

The time allowed for the 156 miles between Kings Cross and Doncaster was 150 minutes, but the train arrived at Doncaster in 146 minutes, a record for the line.

445	SMOKE RINGS
446	THE "LOST WAX" PROCESS OF MAKING CASTINGS
448	THE VICKERS-ARMSTRONG SOUTH MARSTON EXHIBITION
450	READERS' LETTERS
451	TWIN SISTERS
454	CATALOGUES RECEIVED
455	TALKING ABOUT STEAM Fifty Years Old!
458	FOR THE BOOKSHELF
459	L.B.S.C.'s CHRISTMAS PRESENT FOR THE KIDIES
463	A Simple Steam Crane THE STORY OF A SEMI-PORTABLE WORKSHOP
466	IN THE WORKSHOP A Jig-saw Machine
470	QUERIES AND REPLIES
471	BY TRACTION ENGINE THROUGH LONDON
472	THE ISLE OF WIGHT EXHIBITION
473	WITH THE CLUBS

CONTENTS

During the Coronation year, Britain has been singularly fortunate in winning honours in many fields of sport and adventure, and the achievements in motor-car racing have been particularly notable. Not the least distinguished of British cars is the Jaguar XK120C, the exploits of which, including the winning of the 24-hour race at Le Mans, have made motor racing history. The model shown in this photograph was built by Mr. Rex Hays, and represents, in 1/10 scale, this famous car. It has been sent to Berlin as a representative not only of the Jaguar Company, but of the British motor industry generally, in an international exhibition, where it will be shown in company with other exhibits demonstrating British achievements during 1953, including the conquest of Mount Everest.

The "LOST WAX" Process of making castings

The report of a lecture by Mr. W. Savage
to the Sutton District Model Engineering Club



Forming the wax pattern

mould, one being by centrifugal force, known in the past as "bucket casting." To carry this out, a handle is provided, with a short chain, on the end of which is a flask and ring containing the mould. The metal having been melted on top of the mould, it is then swung in a circular motion, rather like swinging a pail of water around one's shoulder. This can be varied by using a horizontal motion, which is usually performed in these days with a spring mechanism. Another method is by forcing the metal into the mould by compressed air, or by steam pressure, which is the method I propose to demonstrate. First, we take a natural ivy leaf, and by means of plaster of Paris, we take an impression of the face of the leaf. When set, the leaf is removed from the plaster. Dental casting wax is now warmed over a spirit lamp, and gently pressed into the plaster impression of the leaf. This is now thickened slightly, to make it strong enough for the


IN response to many requests, I propose to let a little light into the subject of casting by the Lost Wax Process. The methods which I propose to speak about are mainly of dental origin, which have been known in the dental profession for many years. The article required to be cast is made in wax, of the type obtainable in the dental profession. The sheets of wax are made in many thicknesses, the one I propose to work in being 4 mm. thick. A pattern of the required object is first made in wax and embedded in one of the special heat-resisting plasters. The wax is then destroyed by heat, leaving a space within the plaster into which the metal is forced to produce the object required. I propose first to show how to cast an ivy leaf in silver, to make it into a brooch for the adornment of our lady friends. There are several means of forcing the metal into the

Silver Ivy Leaves


purpose for which it is intended. Having formed a leaf in wax, we now have to consider a way in for the metal. This is done by fastening into the centre of the back of the leaf, a piece of wax, formed in the shape of a wire, a little more than 1/8 in. thick in diameter. In the photograph it will just be possible to see the leaf pattern in wax on the plaster impression.

Special Investments

We now take a metal ring sufficiently large to take the pattern, and using one of the special invest-

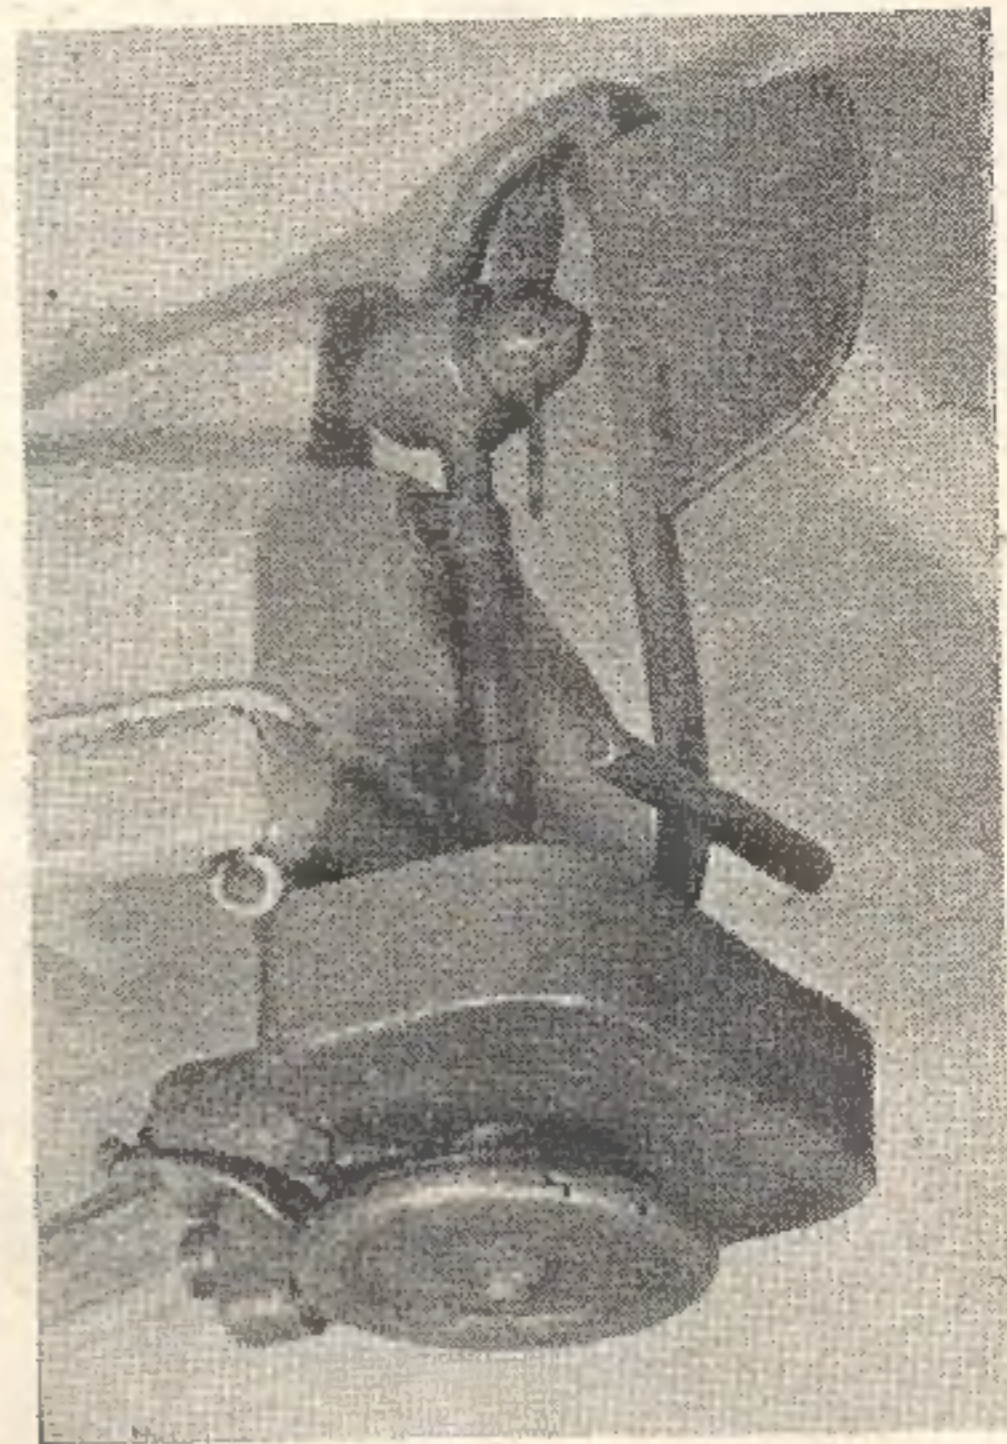

A model outboard motor cast in one piece

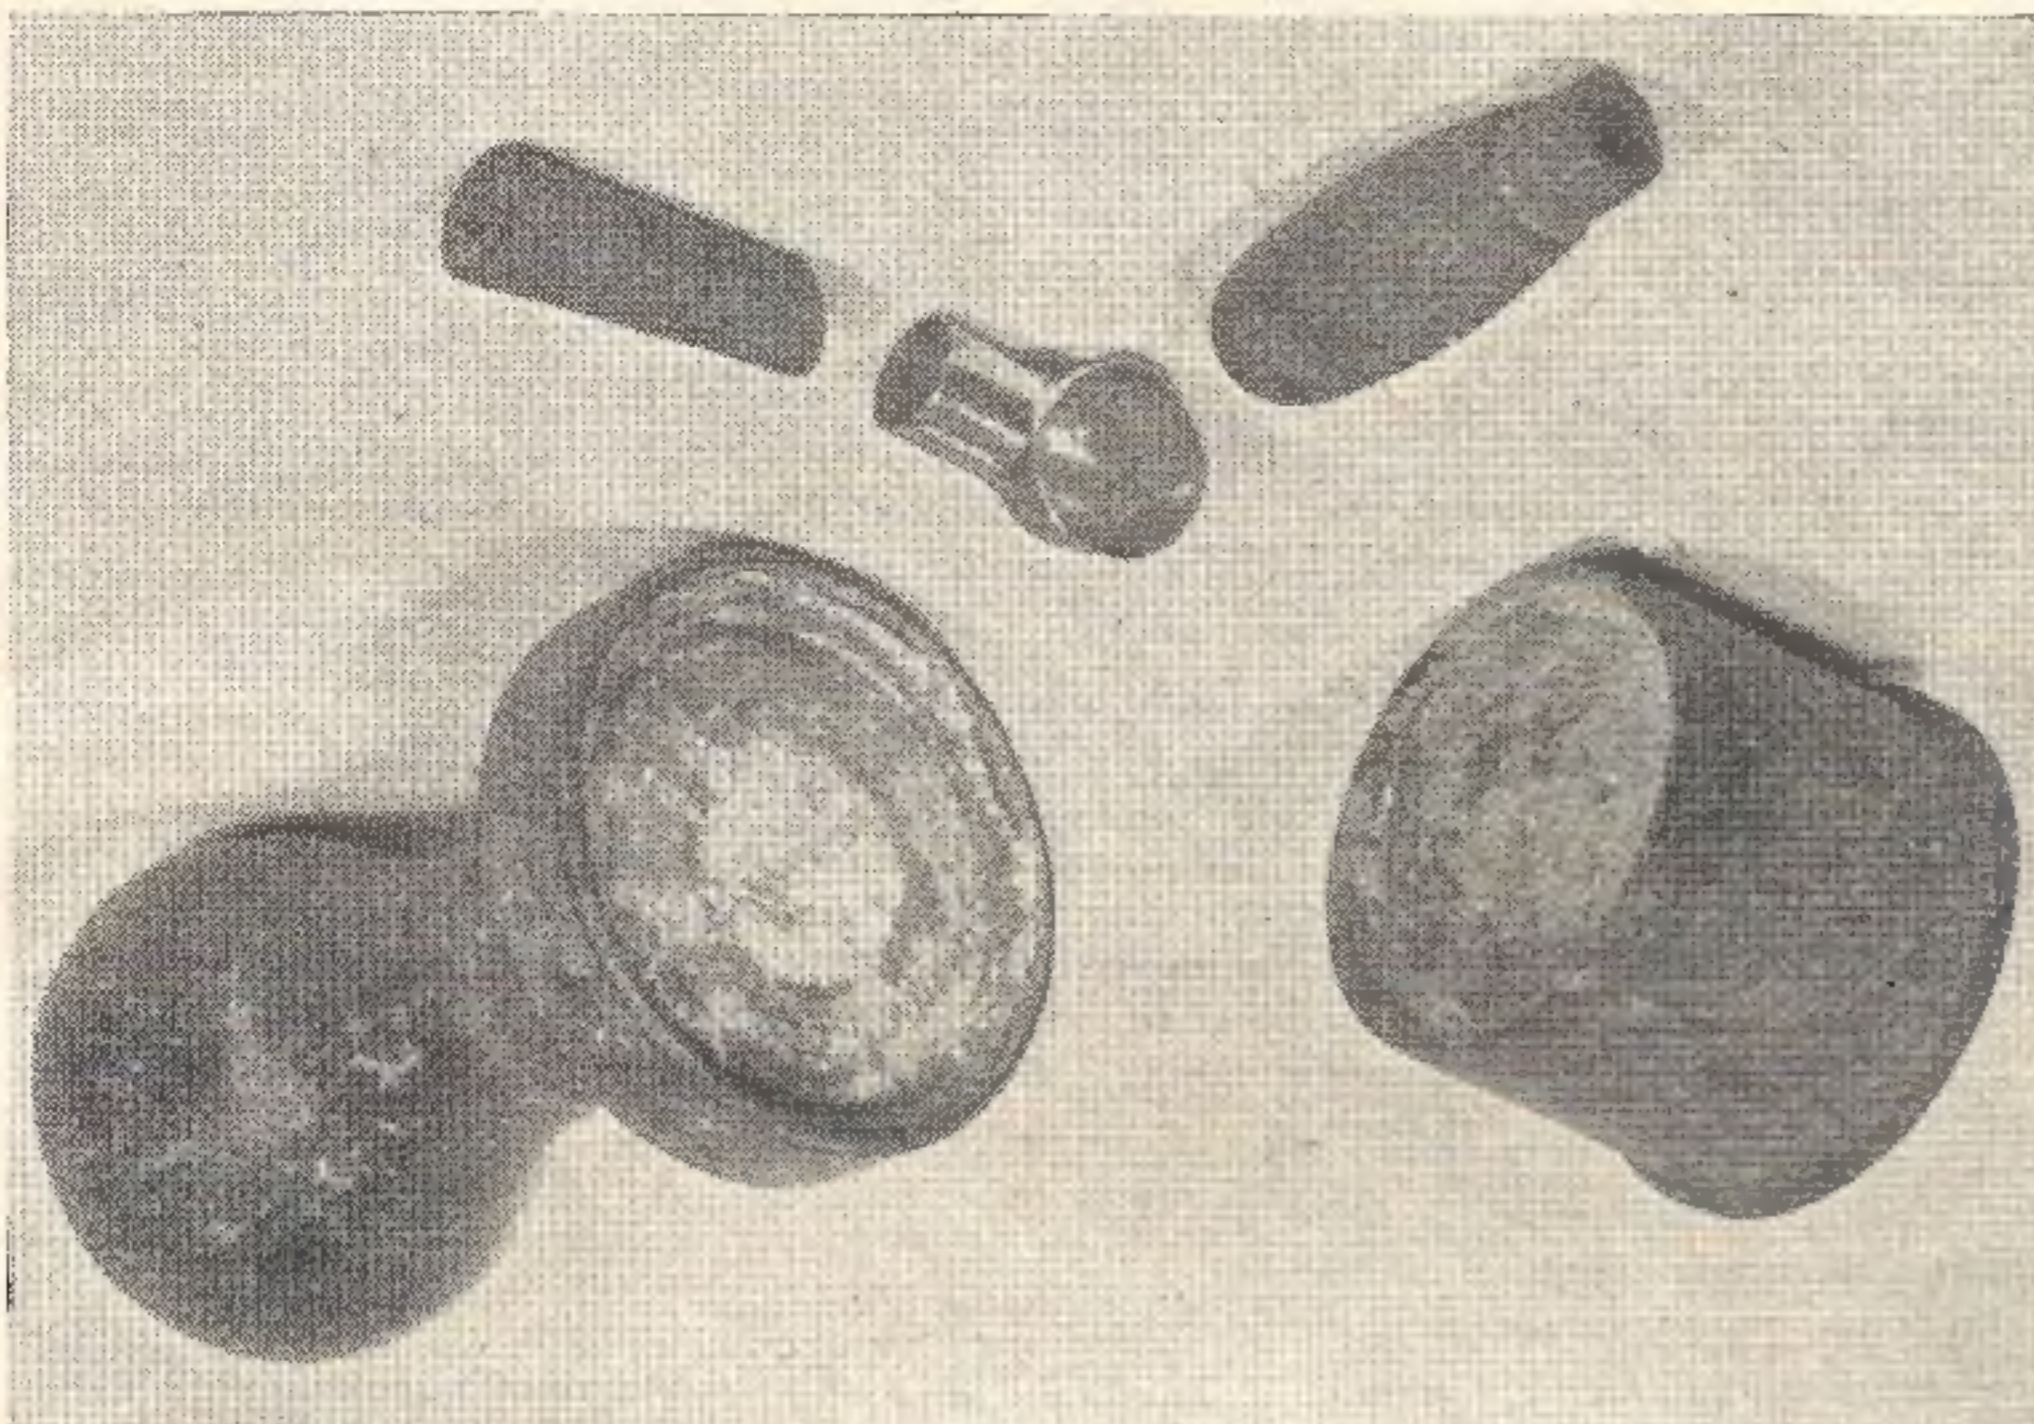

The open-ended ring and pressure pad, also wooden cores used in making the pattern for the ship's ventilator seen in centre



Melting the silver in depression in ring


Using the Pressure Pad
The ring should now be placed on a gas ring, heated slowly, and brought up to red heat. The next operation is to melt the metal in the conical-shaped depression, and bring the pressure pad of wet asbestos, quickly, and with pressure, on to the top of the ring. Steam is immediately generated by contact of the wet pad with the heated ring, which forces the metal into the space left by the destruction of the wax. This pressure should be maintained for a sufficient length of time to allow the metal to set. The whole may now be plunged into cold water, which will cause the investment to disintegrate, leaving the casting to be finished off by any suitable means. By this process, any small casting can be easily made, and though perhaps not always a success at the

ments, which is of a plaster nature, mixed with water, the pattern is painted over with the investment. To ensure that this sticks to the wax pattern, it is a good idea, immediately before painting the investment, to paint it over with acetone. The second investment material, which is coarser in texture, is now mixed, and the ring filled with same, the leaf being sunk carefully into it, so as to be about half-way down within the ring, face downwards. The wax wire that we put in the back of the ring should just show on the top of the investment for location purposes. Having allowed the investment to set, a conical-shaped depression is cut in the top, using the wax wire as a guide, to within about $\frac{3}{8}$ in. of the wax leaf.


first attempt, it can be mastered after a little practice.
After the demonstration, a few articles cast in this process were handed round, and are shown on the photographs. They include a model outboard engine cast in one piece (nothing moves, of course), two brooches cast in silver, one being an oak leaf geranium (this was made using the actual leaf as a pattern) the other two ivy leaves complete on stem, an ivy leaf necklace cast in gold

with hand-made setting for stone. Other photographs show the ring and presser, and a silver casting of a ship's cowl ventilator, together with the two-piece pattern on which the wax was moulded. The pressure pad is a loose fitting lid fastened to a wooden handle, with $\frac{3}{8}$ in. of asbestos millboard inside.
I am indebted to Mr. A. R. Turpin and Mr. E. T. Westbury for the photographs published with this article.

Brooches in silver, actual size

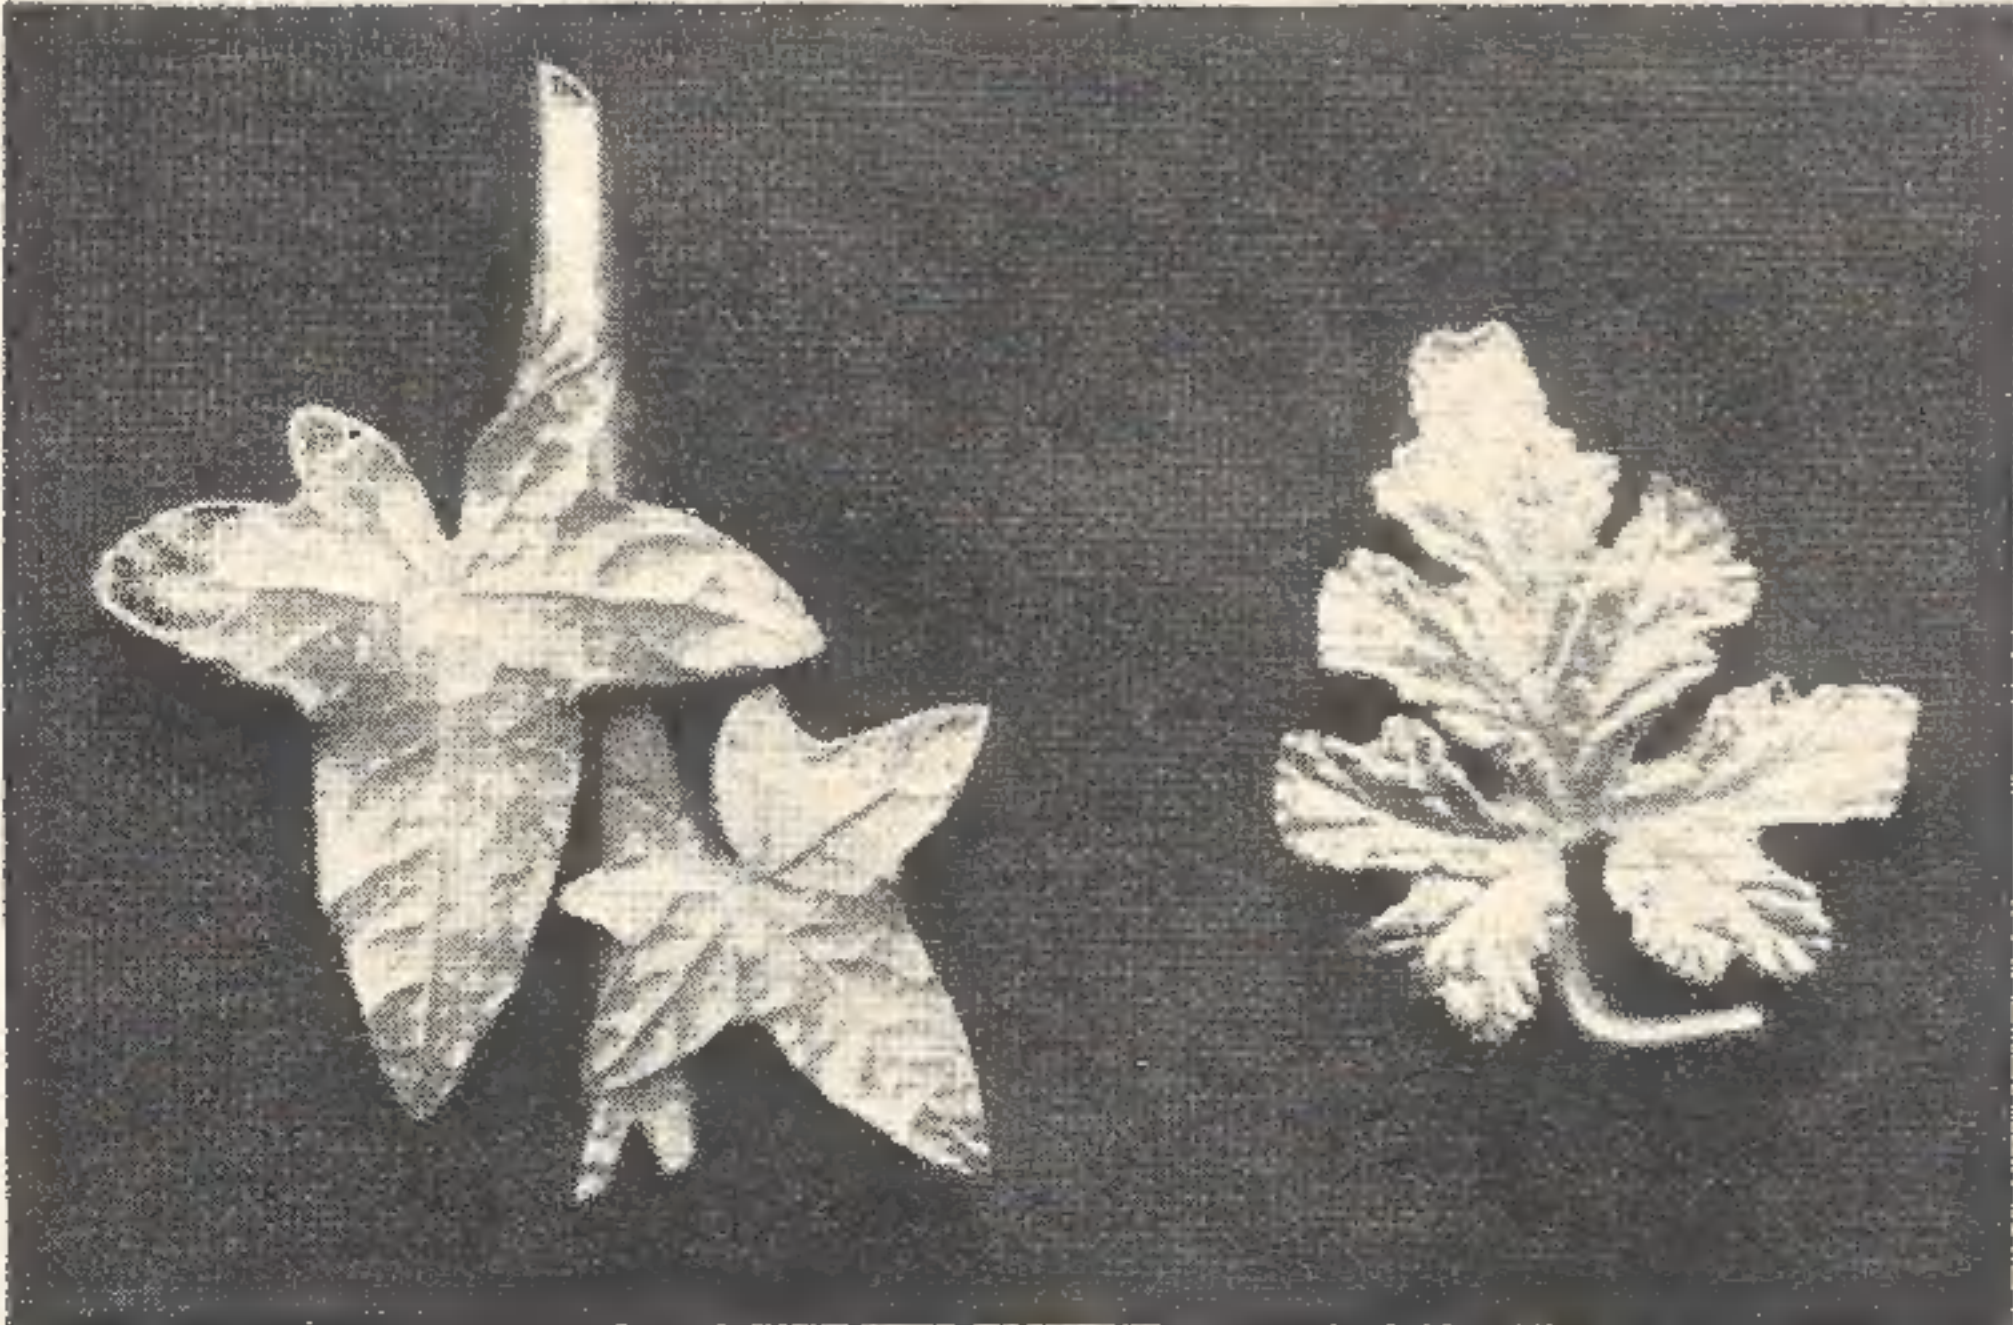

Necklet in gold, actual size

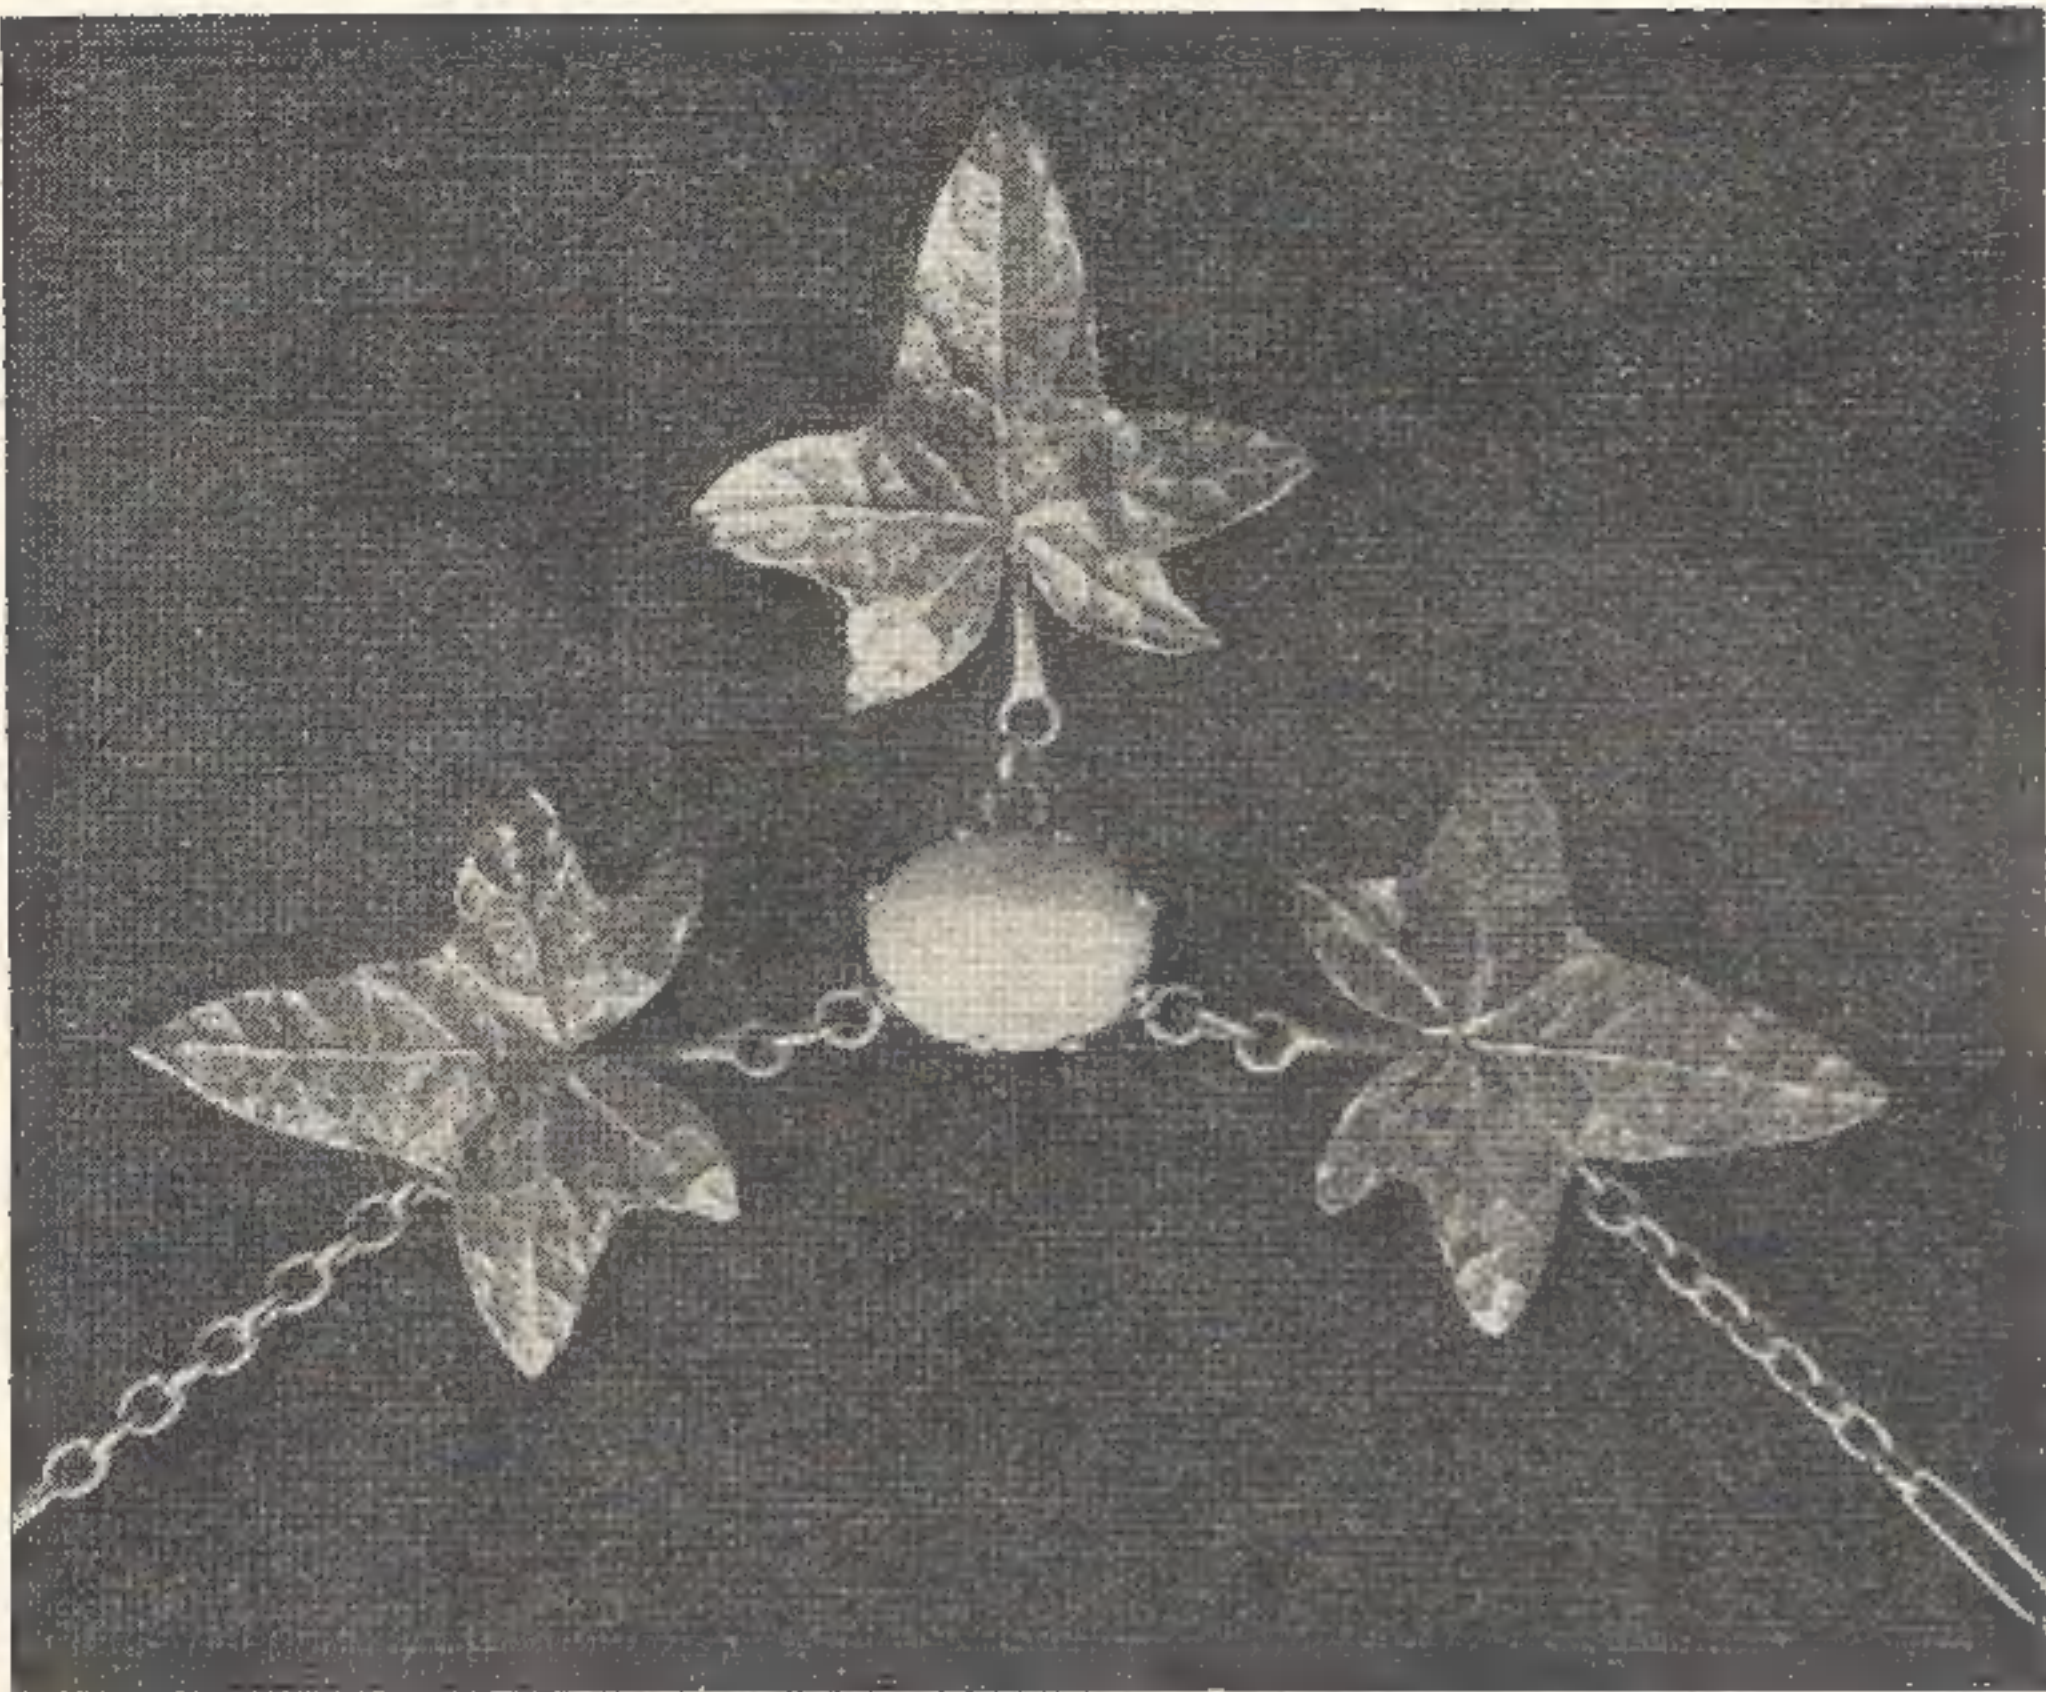

The VICKERS-ARMSTRONG South Marston Exhibition Reported by Norman Hallows

of workshop equipment and special-purpose tools.

A well-constructed and highly finished aeroplane of free-lance design was shown by Mr. E. Higlett. This model has a wingspan of 62 in. and is radio-controlled with the addition of crystal control of the transmitter.

The aeroplane exhibited by Mr. R. Parsons is powered by a 10 c.c. Ohlsson motor; the designer finds that the model is very stable and easy to fly and it has already done some twenty hours in the air without mishap.

Race Cars
The Weybridge section had several race cars on view, and the model illustrated, made by Mr. E. Bridge-10 c.c. McCoy engine, has the outstanding performance of clocking 112 m.p.h. to its credit, as well as winning many trophies.

Ship Models
There were models of two old-time ships and, as often happens, it is only too easy to be critical and draw attention to items of workmanship of the wrong period, such as machine-sewn sails or chromium-plated fittings.

A MODEL engineering section formed part of this exhibition which was again held at the South Marston aircraft works, situated near Swindon; but this year, for the first time, entries were accepted from the company's other factories grouped in the south of England.


The exhibits in the classes reserved for general engineering work and stationary engines were not as numerous as might have been expected and, here, an opportunity was offered for displaying work of original design in the field of either steam and petrol engines or items

As reports of similar exhibitions, appearing from time to time in this journal, seem to be a popular feature with readers, no excuse is needed for illustrating a representative range of the models shown, together with a brief description of some of the more outstanding exhibits.

Naturally, aircraft models tended to predominate, but sailing yachts and power boats were well represented, and classes for general and specialised arts and crafts were also included.




The model plane, fitted with 10 c.c. Ohlsson motor, shown by Mr. R. Parsons

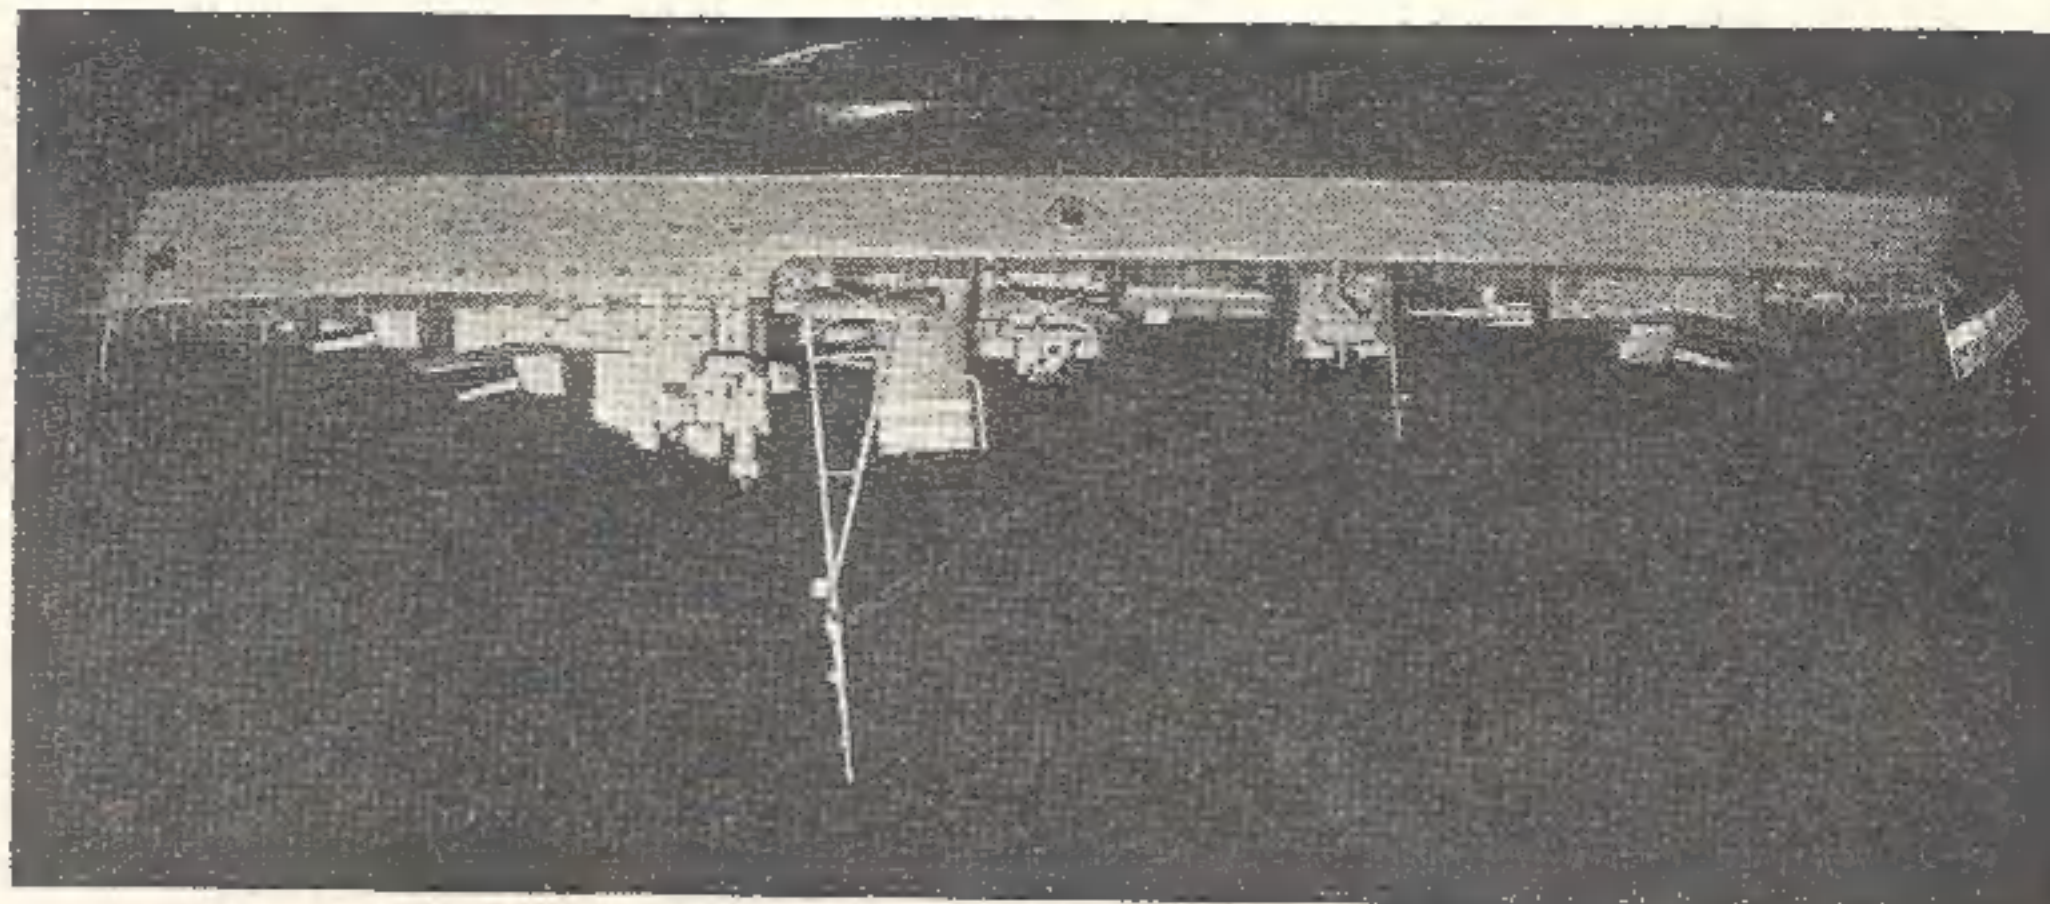

Mr. R. J. Gerry's "Javelin" class destroyer

The diesel engine driven destroyer of the Javelin class, shown by Mr. R. J. Gerry, measures 40 in. overall and has very realistic deck fittings. The attention given to detail and the excellent paintwork help to place the model among the prize winners. Mr. R. Millmore's model of a clinker-built sailing dinghy, showed much good workmanship, but a fault in the fitting of the forward decking and the free use of plywood would hardly escape the judges.

A 112 m.p.h. race car made by Mr. E. Bridgeman

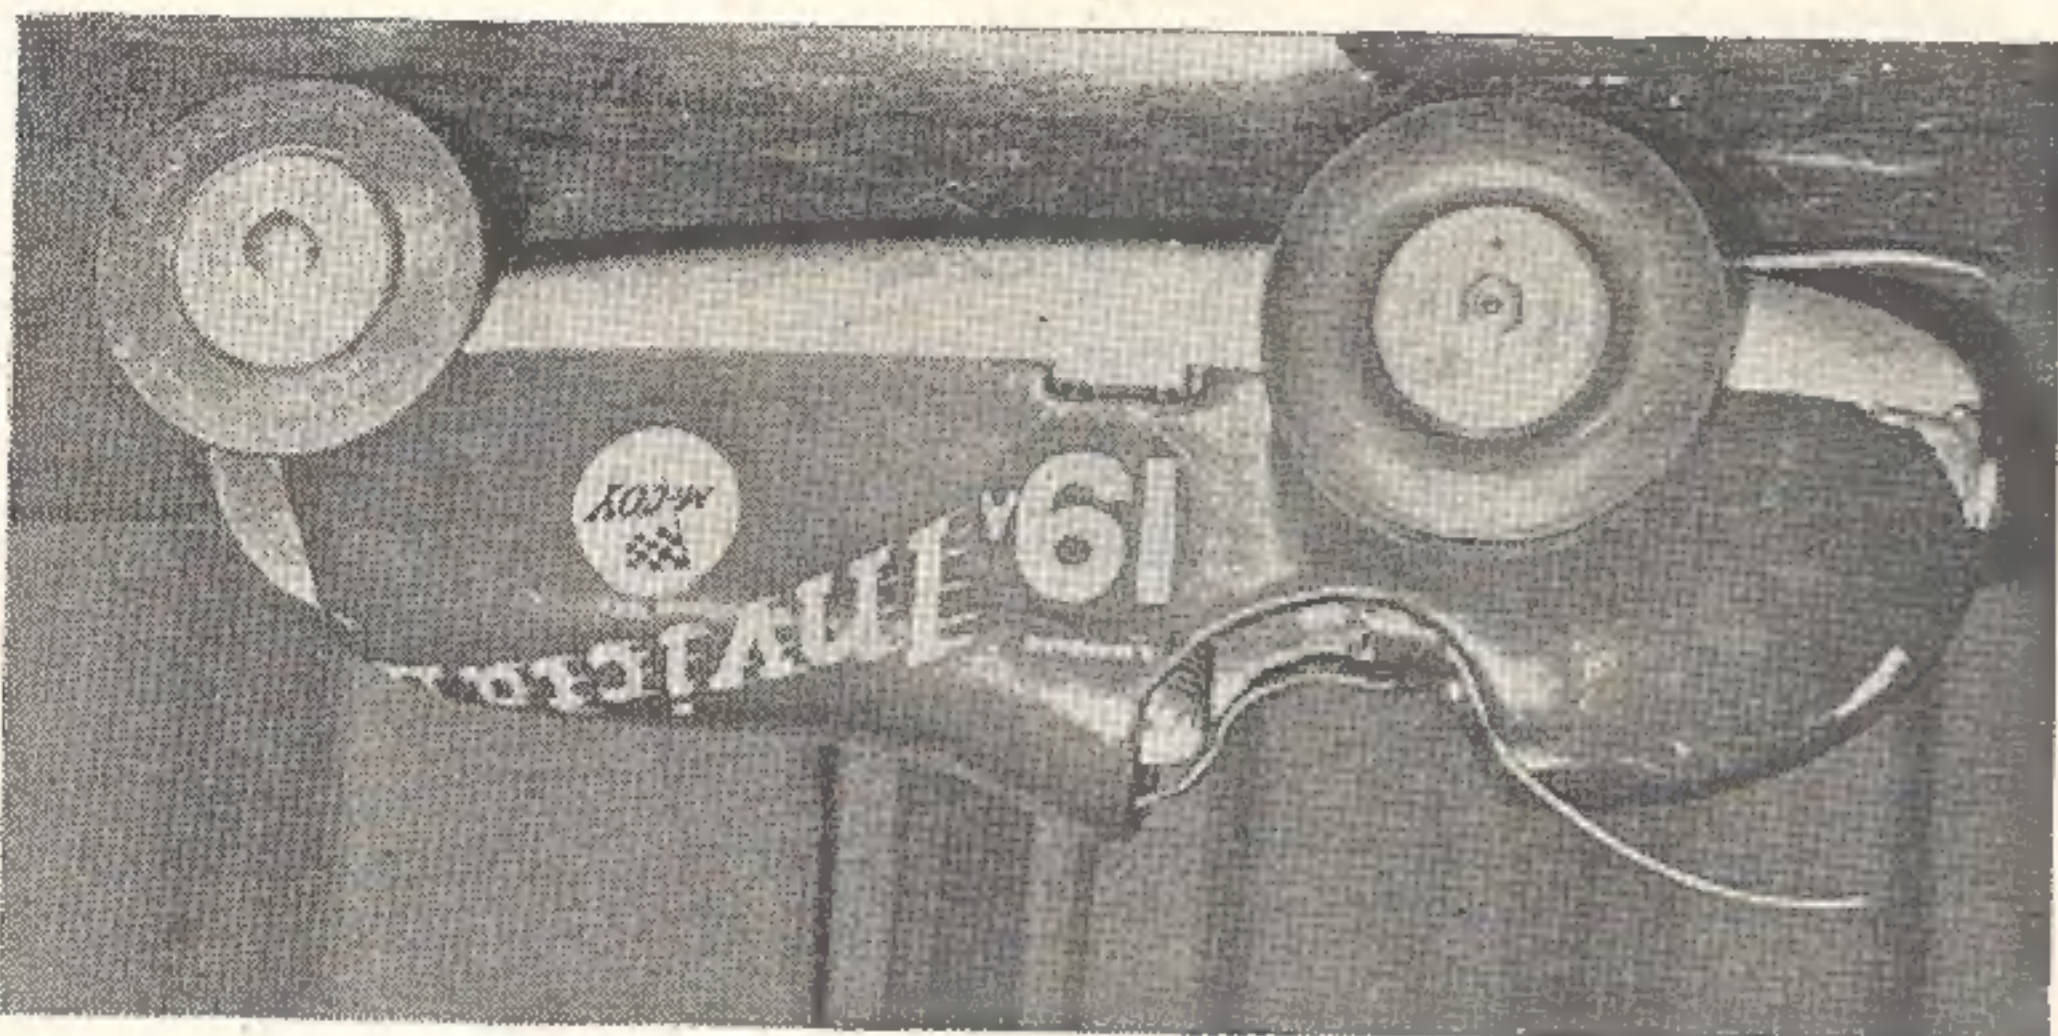

without a model of the *Queen Mary*, and that shown by Mr. V. Rickman is 7 ft. in length and carries a complete range of deck fittings. It is, however, no easy matter to make a satisfactory sheet-metal hull to this large scale, and the joints between the component parts are rather obvious. Moreover, too liberal painting is liable to obscure the details of the deck fittings. The four propellers are driven by an electric motor, through a worm reduction gear and two pairs of crown wheels to give the correct direction of rotation. In addition, the steering gear is operated by a small electric motor through suitable reduction gearing.

Sailing Yachts

For quality of workmanship and close attention to detail, the model sailing yachts were one of the outstanding features of the exhibition. Three of these models, were shown by the Weybridge section. One built by Mr. A. H. Pullen, is an A-class yacht, 4 ft. 4 in. in length on the water line. This boat is a candidate for next year's international races. Another yacht belongs to the 36 in. restricted class, and is also an example of fine craftsmanship. A further yacht (Mr. G. Marshall's) is to take part in next year's national races for the Marble-head class.

Although the factory is so near to Swindon, few representative model locomotives were in view, so the 2½-in. gauge model of modified *Fayette* design at once attracted attention. This finely finished engine, built some years ago by Mr. C. Davies and his father, has won many awards in the past; but as a result, no doubt, of hard work, there is now evidence of wear in the motion and rod bearings. The model is fitted with a super-heater as well as a mechanical lubricator driven from the front coupled axle. A ¾-in. scale model of a dockyard locomotive is well made and is representative of its class, the excellent paintwork combined with the outstanding detail finish giving the little engine a most attractive appearance.


Noteworthy Craftsmanship

Sheet metal working usually enters into commercial aeroplane construction, and the examples of this craft illustrated could hardly be surpassed for fine workmanship. Messrs. Vickers-Armstrong very kindly supplied the photographs of the exhibits selected to illustrate this article.

MODEL ENGINEER



Mr. C. Davies' model of free-lance design

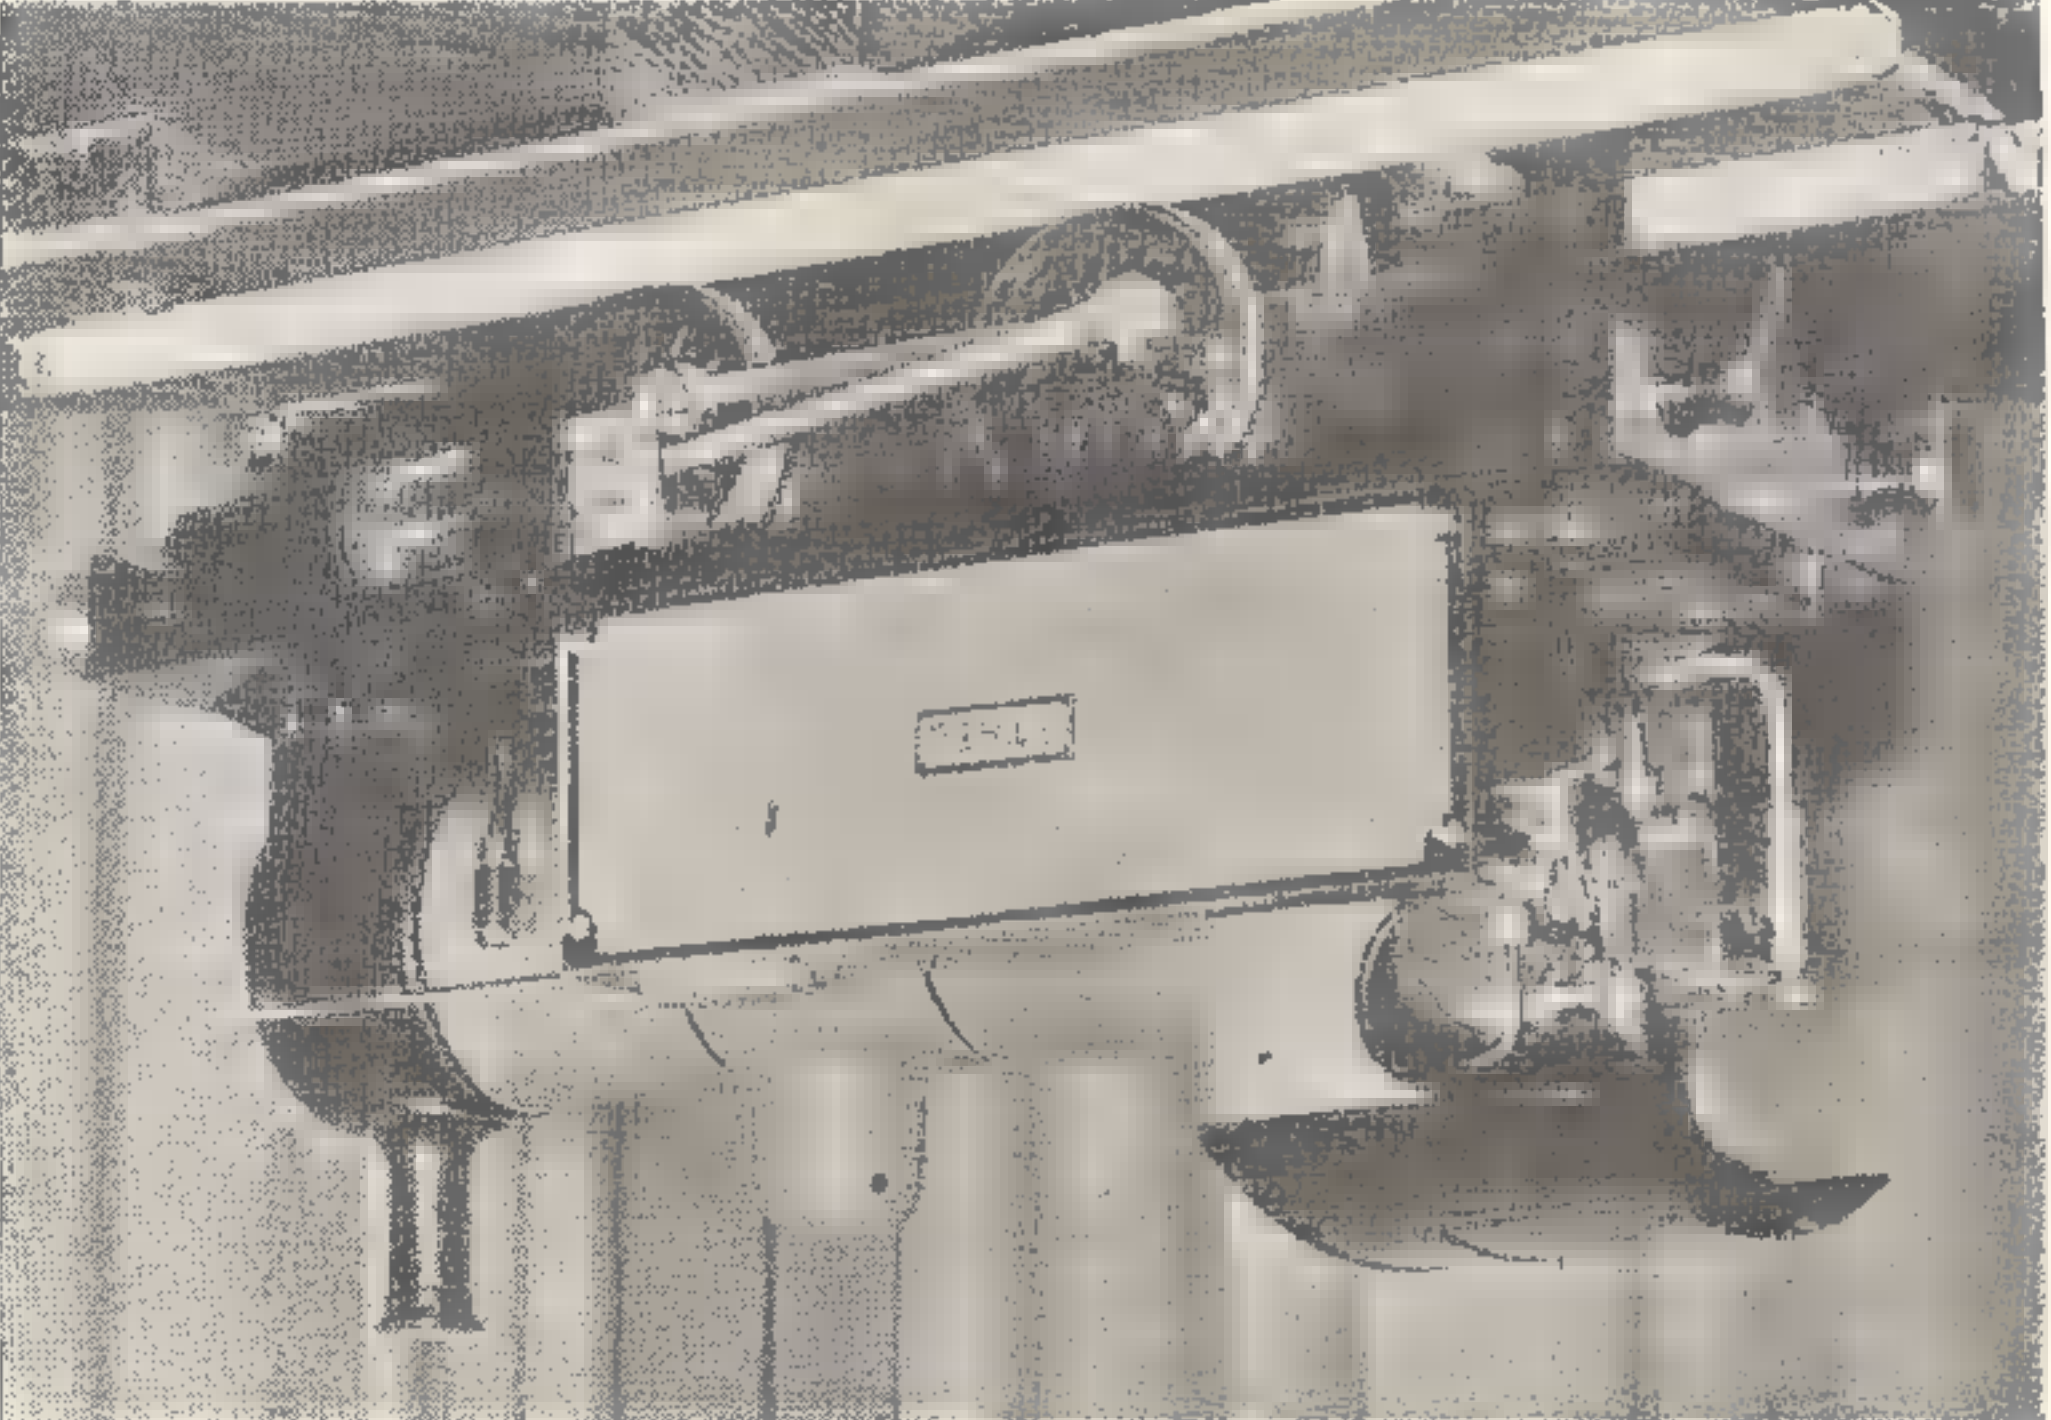

A ¾ in. scale dockyard engine from Weybridge



An example of fine workmanship and attractive design

READERS' LETTERS

Letters of general interest on all subjects relating to model engineering are welcomed. A non-plume may be used if desired, but the name and address of the sender must accompany the letter. The Managing Editor does not accept responsibility for the views expressed by correspondents.

MODEL PETROL ENGINE PROBLEMS

DEAR SIR,—Mr. Curwen's argument in favour of negative earth ignition system is new to me. During the war, working on motor transport, I saw both systems and heard arguments in their favour. The argument for negative earth was usually zero potential on the exposed parts of the vehicle, whilst positive earth, it was claimed, reduced corrosion of the battery terminals. Doubling the speed of the magneto results in a faster spark at the lower speeds, and that in itself may have been the solution to the problem.

My experience with the first running of a Kitiwake Major 30 c.c. engine may be of some use to the people who handle the more "peanut" sized engines. The coil is an old motor-cycle magneto rotor, with a car type condenser, and a 10,000 ohm resistor in the plug lead as a suppressor. The source of current is the usual four-volt battery, and the plug gap is 0.018 in.

The first thing necessary to get it running without flooding was to lower the float chamber about $\frac{1}{8}$ in. below that shown on the drawing. In any case the $\frac{1}{8}$ in. diameter ports on the engine don't tally with the $\frac{3}{4}$ in. diameter shown on the carburettor drawing. The engine then idled for a couple of minutes and then stalled, due to oil. The jet was only open about $\frac{1}{2}$ in. turn, so it wasn't coming in there. To find a cure I drilled six No. 70 holes through the bottom ring groove, and also machined a groove about 0.015 in. \times 0.015 in. deep near the lower end of the skirt and drilled that the same as the above.

As you know, these grooves are cut on close fitting plunger pumps as used in the oil pump on this engine, and in the fuel equipment of heavy oil engines, where no gland can be fitted, to act as pressure breakers and prevent leaks. In engines too small to fit rings, this grooving may help to solve oiling problems.

One of the problems which these small engine designers always leave to the builder to solve is leaking mains, especially with pressure-fed engines. The answer is to cut a groove just inside the outer end of the bush, and drill through into the crankcase. The path may be cut with a dental burr before inserting the bush.

Using an "Electrix" unit as a cooling fan, my engine has now idled smoothly for twenty minutes continuously without signs of labouring. Although the plug is not bone dry, the piston is now showing signs of the smoky deposit that is the normal growth in a working engine.

Yours faithfully,
A. E. CLAYSON.
G.I. MECH. E.

[The experiences described by Mr. Clayson with regard to oil control difficulties are of great interest, but it may be noted that in many "Kitiwake" engines, both in 15 c.c. and 30 c.c. sizes, no oiling trouble whatever has been encountered. Undoubtedly, many details of construction and adjustment, also the choice of lubricating oil, affect this issue, but the provision of scraper grooves on the piston is a well-known precaution against over-oiling, and can be recommended to anyone who encounters this trouble.—Ed., "M.B."].

DEAR SIR,—Mr. Keller (17/9/53) is of course entitled to his opinion, but seems to have mistaken THE MODEL ENGINEER for a trade journal. There are other ways of opening a cylinder lock than that so well described by Mr. Capps, but Mr. Capps was not writing for iron-mongers, even those so fortunate as to possess a proper machine, as Mr. Keller calls it. He was describing one quite satisfactory way, in which the amateur craftsman might dis-embowel a cylinder lock and fit a key to it, and made no claim that his was the best, the quickest

or the neatest way. There was indeed, no reason why he should, for one might hazard a guess that one or two per cent. of all readers of THE MODEL ENGINEER would once or twice in their lives make use of Mr. Capps's article, which would wholly justify its publication.

As for Mr. Keller's sneers about a "real" ironmonger (are any iron-mongers unreal?) and "proper" locksmithing be left to those whose trade it is, a few pages after his letter is an article on making a tripod head by Mr. Kelly, who puts the rhetorical question: "Surely no model engineer worthy of the name would buy one?" Would Mr. Keller pursue his injunction to its logical end, and have us all stop fiddling about in our workshops and go to professionals for the models, gadgets and devices we want? For the answer to this, see G.B.S.'s "Pygmalion."

Yours faithfully,
GROUP CAPT. G. STRUAN MARSHALL.

CYLINDER LATCHES


DEAR SIR,—I was very interested in Mr. Capps's article on cylinder latches, also Mr. J. Heptonstall's letter.

Could either of these gentlemen inform me how I can make a key (master) to fit 12 cylinder latches? Yours faithfully,
W. BUSH.
London, S.W.

DEAR SIR,—Referring to your Queries reply to (R.F.M. Swindon). In the September, 1952 issue of *Newnes Practical Mechanics* appeared an article by A. R. Bades, describing the construction of a water evaporator refrigerator. This article took first prize in its section of a competition describing useful devices capable of being made with easily obtainable materials. Full instructions and particulars of materials are given, and there are dimensioned illustrations.

Yours faithfully,
W. J. ARNOT.
Bristol.

WATER EVAPORATION

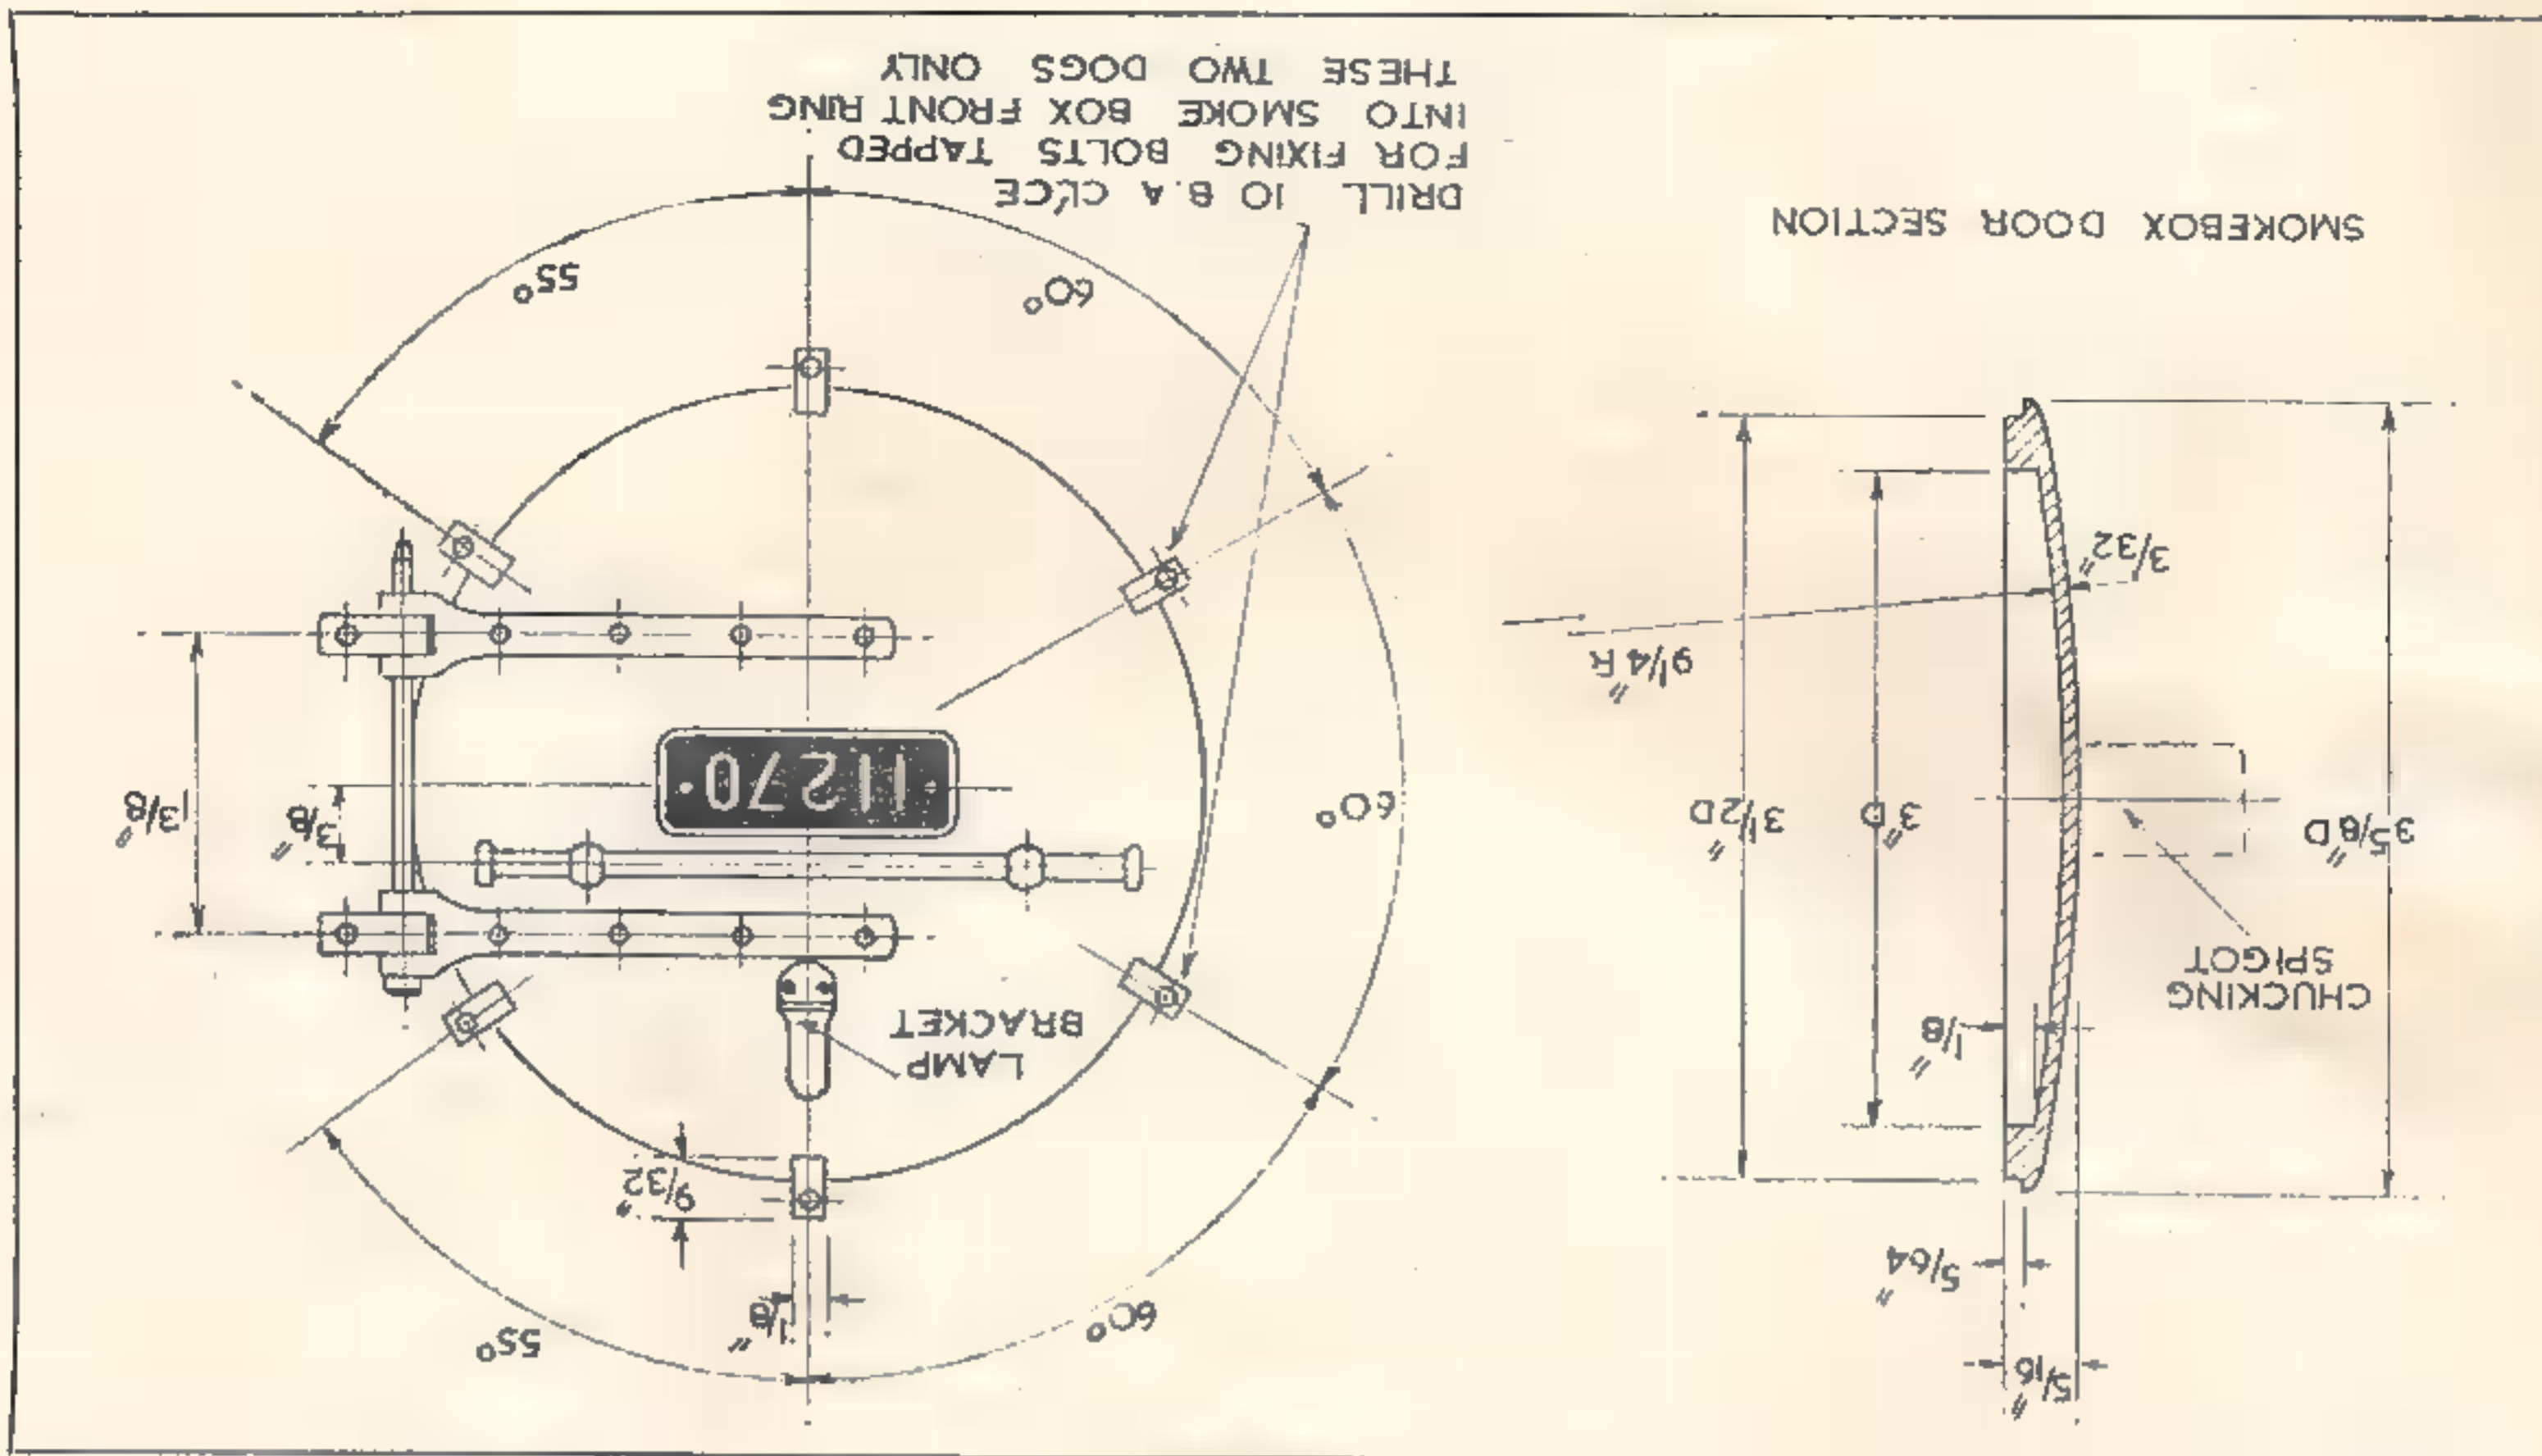

Continued from page 295, September 3, 1953.

remaining parts of the smokebox; The problem this week is the view on a new problem.

better than being able to gain another skill and outlook, there is nothing if your friend happens to be equal in completely silent companion, and company when at work, even a come at all. Altogether, I like become either vague or cease to and then my answers to questions, job calls for extreme concentration, work quite efficiently unless the case with me. I can talk and their stroke, although that is never put quite a number of people off Being watched when at work can find fault.

other, critical eyes may be trying to and we know that at some time or one's work is in the shop window, inner details. Here, in a sense, more trouble than the meticulous more exterior jobs often caused him he confided to me that some of the motive builder the other day, TALKING to a really keen loco-

always aim to hold the work just is slender or thin-walled. One must easy to mark or distort work that is very powerful, and it is only too sense; the modern three-jaw chuck course one has to use good common-distortion) is not too difficult. Of metal, holding it (without excessive iron is much more rigid than gun-front ring, the section is fairly stiff and coupled with the fact that cast-

The Problem of Holding

When machining large diameter, this section rings, the problem of holding them in a three-jaw chuck, looms large. In the case of the front ring, the section is fairly stiff and coupled with the fact that cast-

the problem has been mine and has been solved, so that all you have to do is to follow the drawings and instructions. The smokebox has two machined ends or rings, the front ring would best be made from an iron casting, being so much cheaper than gunmetal these days. The back ring really ought to be in gunmetal because you may have to do a small silver-soldering job on the inside flange; but of that, more later.

For those who are not quite certain of procedure for the front ring, this is the way about it. First of all, get rid of as much sand as possible, using a wire brush over the wide surfaces, and an old file or worn out scraper for the crevices. File or chip off any main bumps or ridges (these alone may knock the

it off. push the metal off, rather than turn the operator has been trying to wrench out of the lathe, a sly glance at the tool has shown that noticed that in many cases of work these special tips, I have also bad word for it. But apart from and have yet to meet anyone with a tipped tool for just this job alone, days, keep by them a single carbide-I notice that most enthusiasts these point away in the first 1/2 in. of travel. does not glaze off or smear its sandiest casting that ever was, and to take light and easy cuts on the expensive luxury it was, enables us tool tip, which is no longer the The advent of the tungsten carbide tightly held job out of the chuck. the metal, and this is just one of those heavy cut to get under the skin of casting, to dive straight in with a necessary when machining a sandy been so developed that it is no longer Modern tools and tooling have rather than a round condition.

parts will present a triangular that when it is released, the turned out of the jaws, yet not so tightly

TWIN SISTERS
by J. L. AUSTEN-WALTON

form of private cheating by so doing. When making the dogs, let them project slightly at the back, so that they may later be faced off flush with the door ledge. You may find it convenient to pin each dog in place with a fine rivet or even a bit of brass wire, as they have a way of floating about on molten flux, and there will be six of them to watch—all at once. With the silver-soldering done, chuck once more by the chucking spigot (you see what I meant when I mentioned that point) facing off the projecting parts of the dogs to lie flat with the door ledge, after which it may be removed and chucked the other way round for turning off or removing the spigot, finally facing off to match the rest of the door front, and giving it a good scouring with coarse emery-cloth. There is nothing to be ashamed of in this—the finish left will provide a good key for the paint that will follow later.

The Hinges




For some unknown reason, these are the little devils that always get a bad name when it comes to getting them on fair and square, and in the right position. There is really no reason for this, especially if the pintles are fixed first. Get these in position with the main hinge pin in place and the two straps left flying in the breeze. If the straps have been made up from flat strip

and the bosses silver-soldered on at the end, which is the method I recommend, they will be quite soft and pliable, which is just the condition we need. Put the door in place and bend the straps over the curved door face, spreading them out if necessary, and fixing by one rivet each, out and along their length. Guide lines might be scribed to advantages on the door first. Follow on with the remaining rivets when you are sure the straps are lying flat and true, and not standing up in loops between each rivet position; the worst is now over.

Remaining Fittings

The remaining fittings comprise

the lamp bracket, the front handrail, and the engine number-plate. The lamp bracket calls for no comment, except that it has the normal step at the bottom for the lamp to rest on. The front handrail is as shown on the drawing, and it will be noted that the end buttons are separate and screwed into the rail ends. These are not absolutely necessary but certainly make a whale of a difference to the general looks at the front end. They are authentic, too. Making the rail ends slightly smaller where they go through the rail knobs, is a wheeze of my own (I think) and avoids the fiddling job of drilling for tiny through pegs to key the rail in position. Not

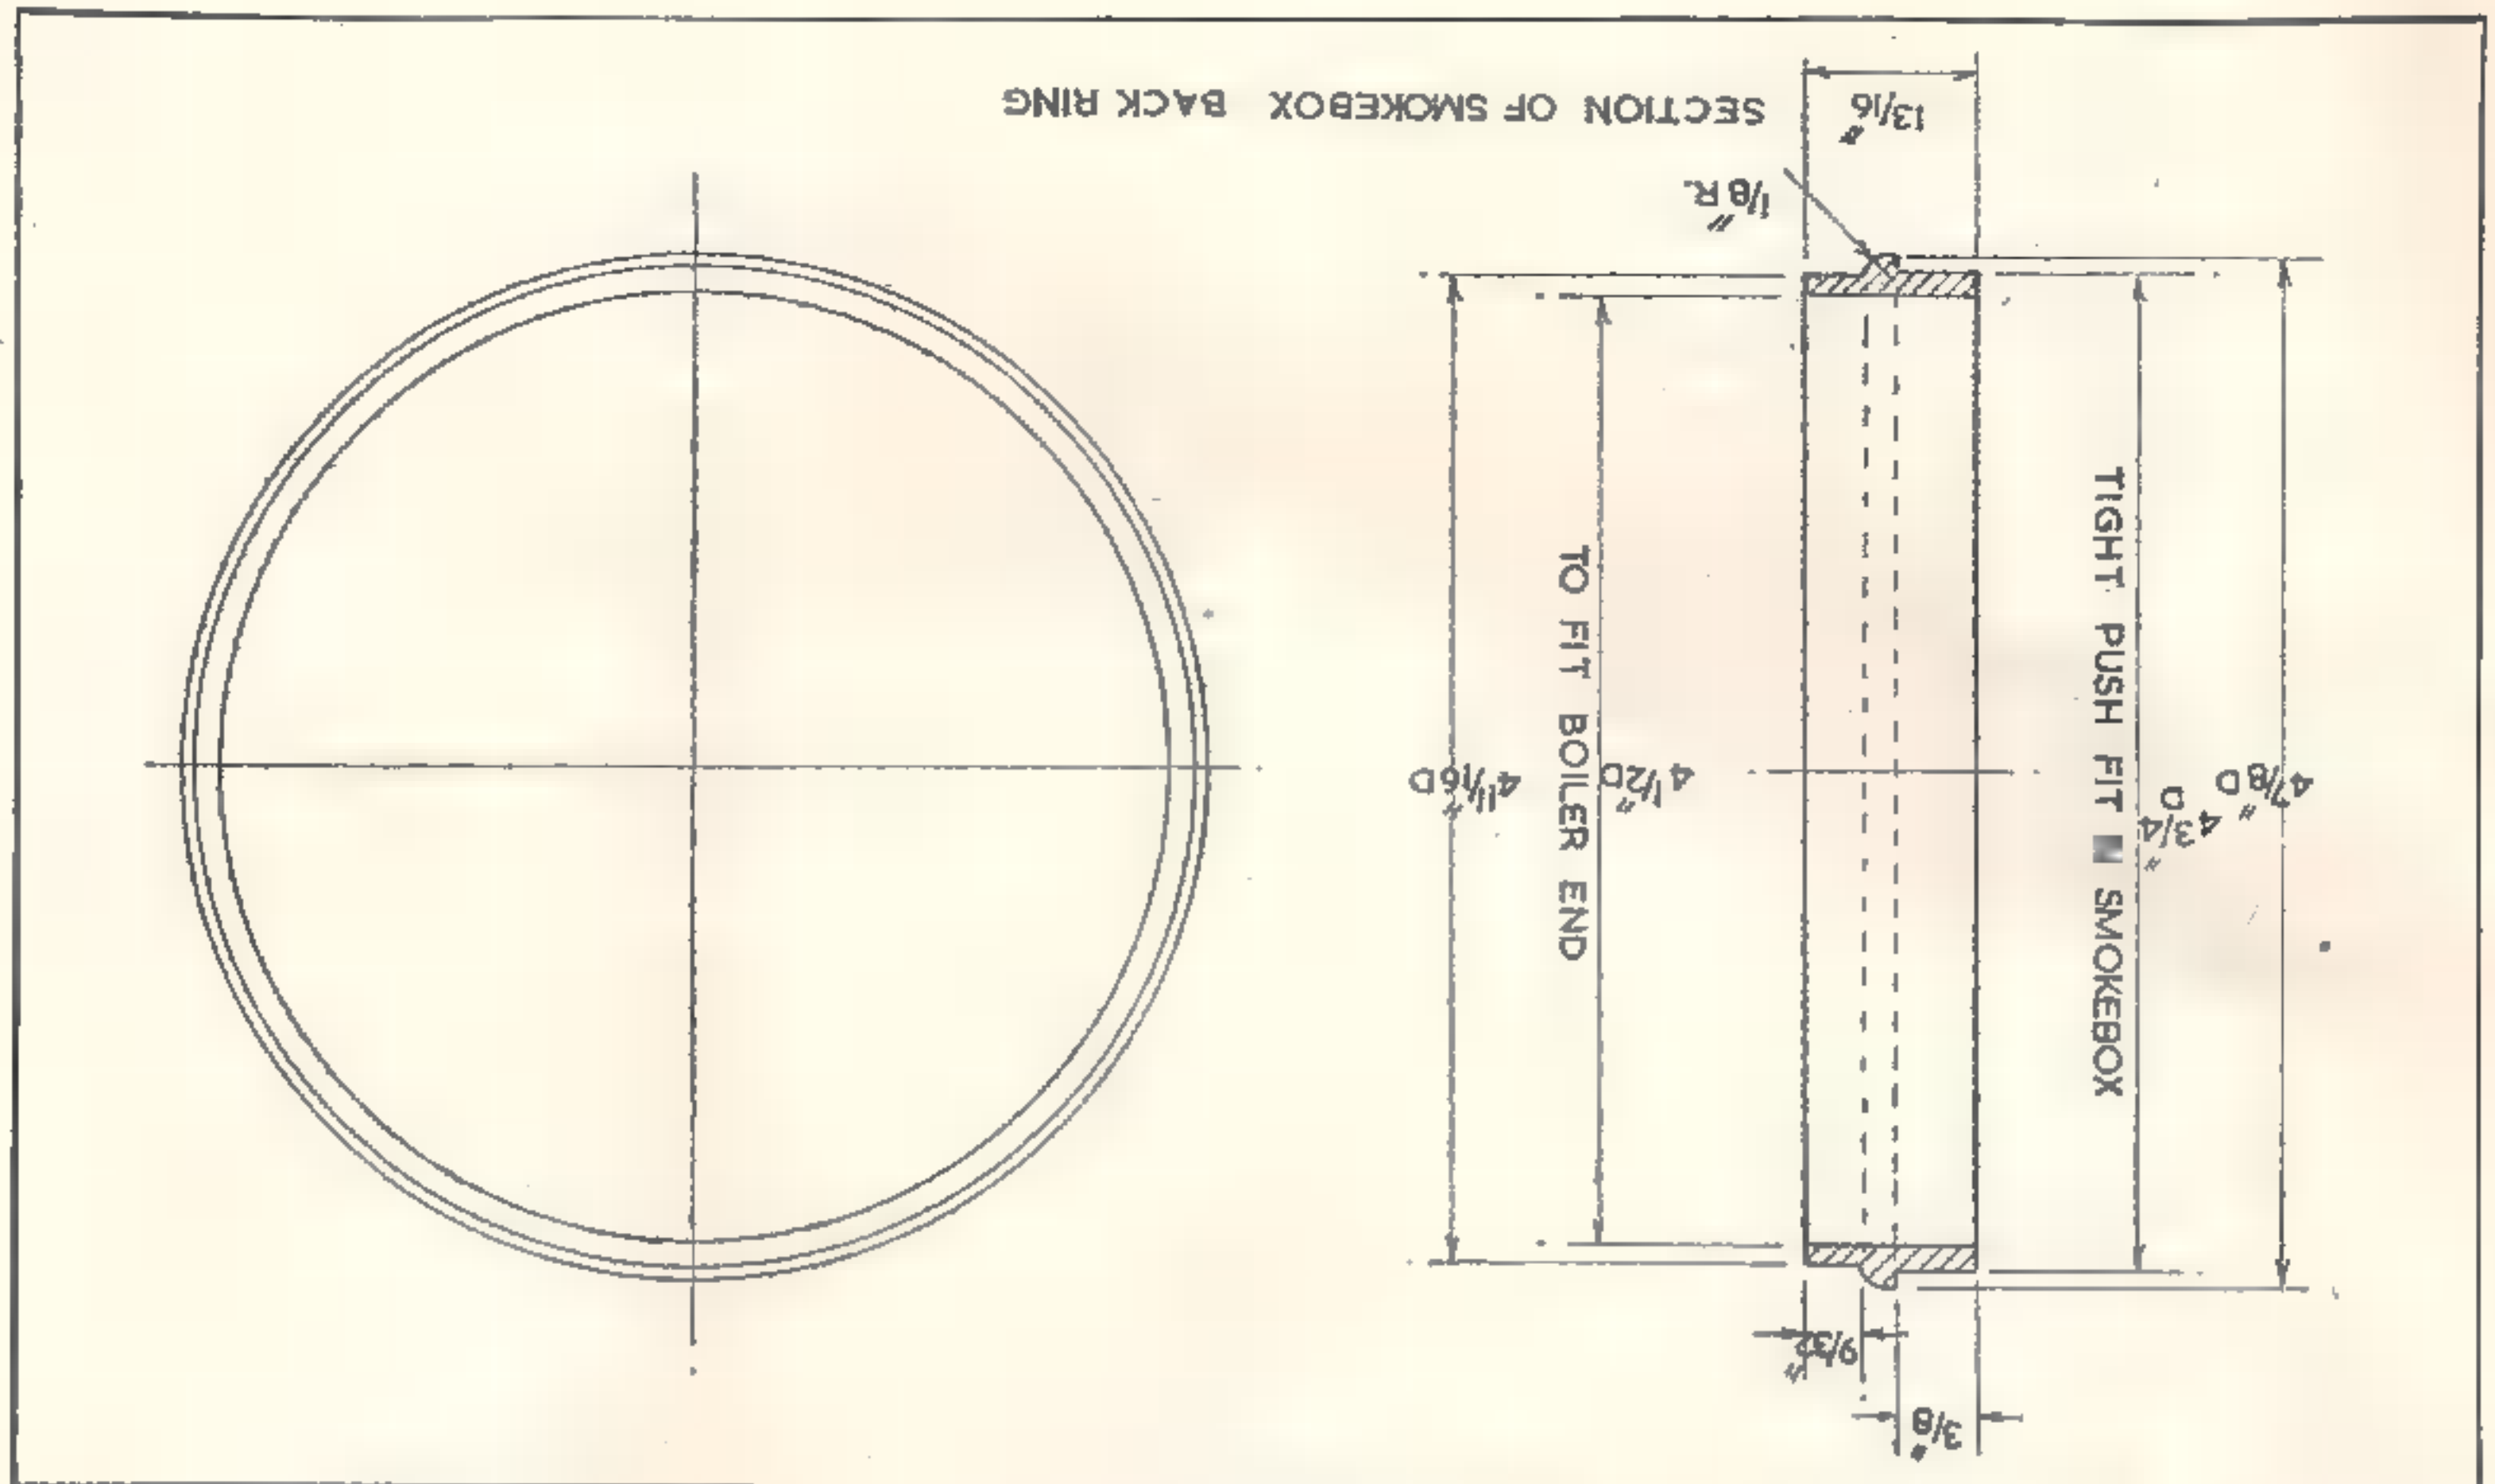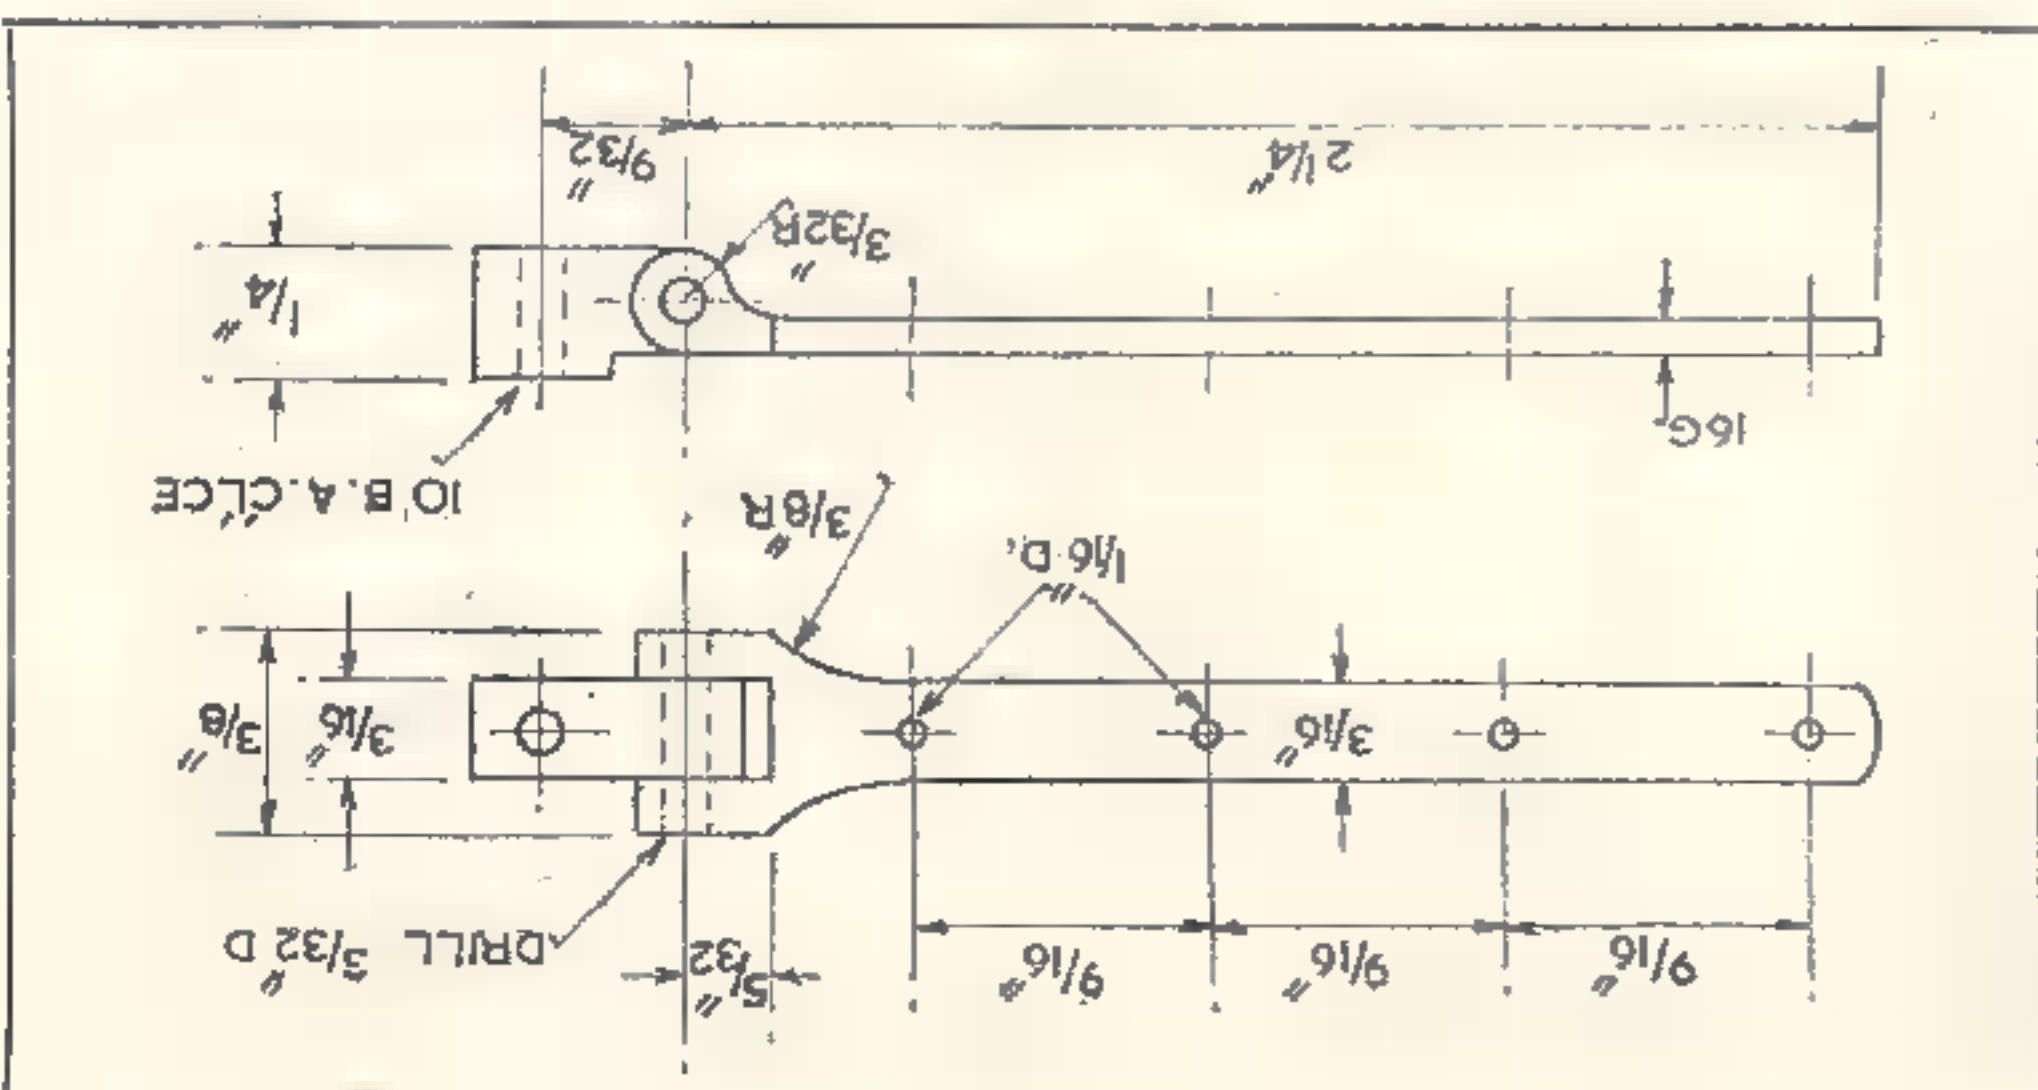

back. If you like the fiddling type of job, there is always that of cutting the numerals out of thin brass and soldering them on to a backplate. My plates were done by photo-etching, taken from a large drawing I made for the job, and I have asked our editor to reproduce here in full size, the actual photograph (taken in reverse) that was used. This method is hardly the cheapest, but undoubtedly the best. If you wish to avail yourselves of the method, all you have to do is to trace this plate with its numbers, ink it all in very carefully and send it off to your local newspaper or printer who will get the necessary blocks made for you.

When these come to hand, all you will need to do is to trim the outside edge carefully, black in the background with enamel and shine up the border and numbers by rubbing the plates on very fine

The full size number-plate in reverse

07511

A Problem
The engine number-plate is always a bit of a problem, even if it is cast in brass (which is the ideal). The work of making the pattern for this is quite as much as making the finished job from the solid, except that two plates will ultimately be required—one going on the bunker

only that, at any time you wish to remove the rail for cleaning, painting or repairs, a couple of nuts removed from inside, and the whole issue takes to pieces in a few seconds. Whilst on the subject, remember to spot-face the door front for seating the rail knobs at the front, and doing the same at the back will ensure the nuts having a reasonable seating; but do not overdo it—the door wall is not very thick.

We have received copies of the latest catalogues to be issued by Kenyon Bros. (Hertford) Ltd. The first of these consists of 34 pages, and costs 9d., which is refunded on the first £1 order. It gives particulars and prices of blueprints, castings and parts for live-steam locomotives from 5 in. gauge to "O" gauge, including most of "L.B.S.C.'s" ever-popular range. We like the new idea of allotting a page to each engine, each headed by a reduced reproduction of the general arrangement drawing; this is an instantaneous aid to identification and will be welcomed by enthusiasts everywhere, but especially overseas where the various engines illustrated are not so familiar to patrons as they are to us in Great Britain.

The list also covers the Kenyon mill engine and a wide variety of useful fittings, wheels and a passenger-

The second catalogue, of sixteen pages, deals with tools and materials, including the well-known Kenyon taps and dies, boring bars, tap wrenches and other small-tool specialties, and several new lines feature in this catalogue. We have recently had an opportunity of trying out a set of form reamers specially made for machining the tapers and flares of "L.B.S.C.'s" injectors, also cutters for spot-facing and counter-boring, all of which conform to the same high standard of quality in relation to cost. A wide range of materials, including steel, brass, copper, etc., in sheet, tube, rod and various sections; screws, bolts and nuts, and other model engineering requisites are also listed.

CATALOGUES RECEIVED


As for the finish, the whole lot should be dull black with the exception of the hinge-pin, and I suggest, the heads of all the 10-B.A. studs. A spanner soon knocks the enamel off things like nuts and bolt heads, and as you will have to remove the two fixing studs from time to time, you do not want to draw too much attention to two out of six bolt heads. From time to time we hear comments on smokebox temperatures, and what it does to the paint. I have never suffered in this direction, and the smokebox of *Centaur* still bears its original paint—without a blemish of any kind. I believe in building my boilers to use up the generated heat in the firetubes and other heating surfaces, and this can only be done by calculating the correct tube areas and the disposition of such things as superheater tunnels. Excessive superheating area is one of the main causes of nearly incandescent smokeboxes, and this is very unnecessary fault.

Next on the list is the description of the dome and safety-valve casing. These are not very big items, so we will try to squeeze in details of the running-boards. Several people have written in for these, just because they want to see what the locomotive looks like with them in place. Heigh Ho!—I used to be like that myself some years ago!

(To be continued)

Door Fixing
The method of fixing the door is one that I devised for speed and neatness. You will see that all the "dogs" are captive, which is a great convenience without spoiled appearances. Two of the dogs, shown on the drawings, have clearance holes for 10-B.A. studs drilled in them; the other four are fitted with dummy studs which need never be disturbed. When the door is finally fitted, drill a couple of tapping-size holes in the smokebox front ring into which the working studs will go. Believe it or not, it takes

The type metal, being of a zinc base would soon discolour if not protected, so I advise a thin coat of clear lacquer over the lot. Incidentally, when ordering, say that you require the blocks unmounted—this will save a little expense.

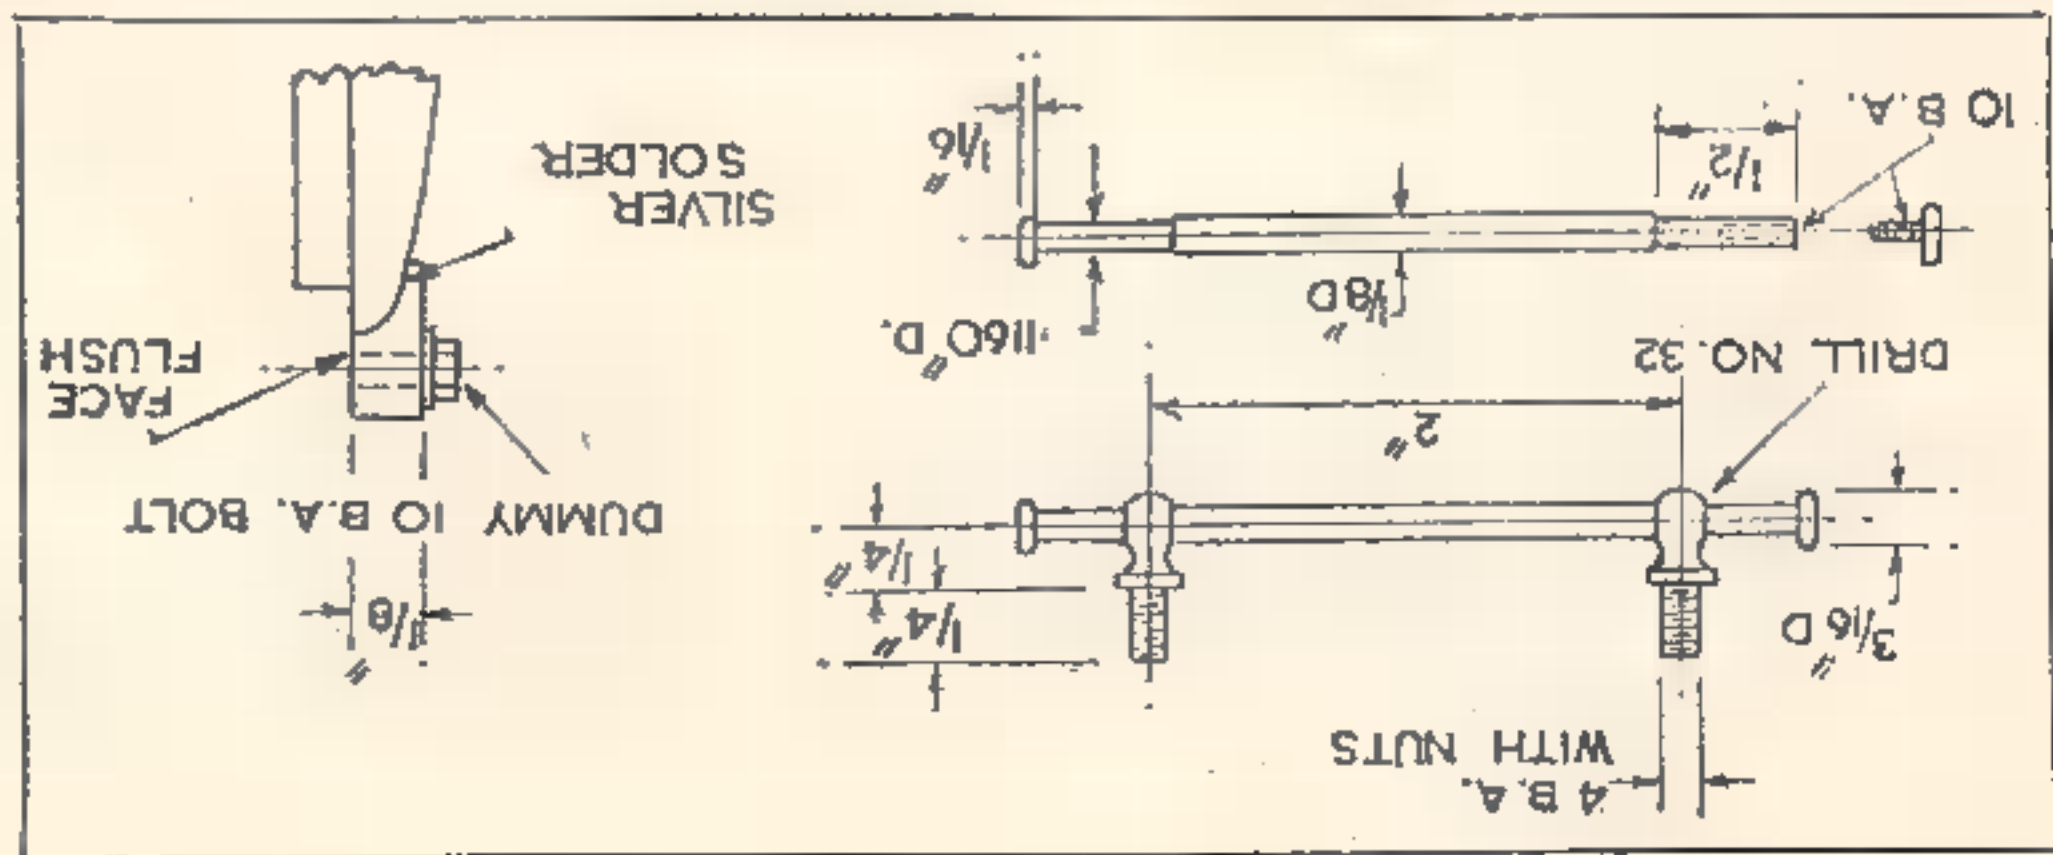

NO. 21—EIGHTY
YEARS OLD!

By W. J. HUGHES

Talking about Steam

Saturday, January 3rd, 1874. The caption to the engraving is "Aveling and Porter's road locomotive, adapted to direct traction steam plowing." As will be seen, the engine is hauling a four-furrow balance plough, and, of course, at the other end of the field the engine would be turned round, to haul the plough in the other direction, with the other set of shares now doing the work.

The accompanying text says that the "large cost of the English rope system of Steam Plowing Machinery seems almost to preclude its general adoption in America," but goes on to quote Aveling's claim that "with an engine weighing not more than five tons, and this weight carried on broad wheels such as the engraving illustrates, from six to ten acres per day... can be plowed with a four-furrow plow."

Aveling's also stated that the

the world, at least in private hands. His enthusiasm is equally great, as is his thirst for further knowledge, and he is in contact with like-minded people in many places, of whom I count myself honoured to be one.

Earning the Dollars


In the sixties and seventies, British traction-engines were being exported to divers countries, by Fowler, Aveling and Porter, Burrell, Ransomes, Clayton and Shuttleworth, and other firms. In January, 1870, the U.S. Congress, under pressure from landowners and agriculturists, lifted their import duties on these engines, and British manufacturers were not slow to take advantage of the fact, by exporting more engines than before.

The first illustration is reproduced from the "Pacific Rural Press," published in San Francisco on

THE working life of a traction-engine or road locomotive has often extended to fifty or sixty, or even more years, as is well known, and in fact there are quite a number of engines in this country, over half-a-century old, still capable of working. However, in the United States there is an Aveling and Porter general-purpose traction-engine still in existence, which was built *eighty* years ago, and is still steamed from time to time.

For the photographs which accompany this article, and for much of the information on which it is based, I am indebted to F. Hal Higgins, of Oakland, California. This gentleman's knowledge of agricultural practice and machinery, especially of the steam variety, is tremendous, and his collection of documents, photographs, books, catalogues, and so on, must be one of the most extensive in existence anywhere in

Reprint from the "Pacific Rural Press" of January 3rd, 1874, showing an Aveling and Porter 6 n.h.p. engine "adapted to direct traction steam plowing."

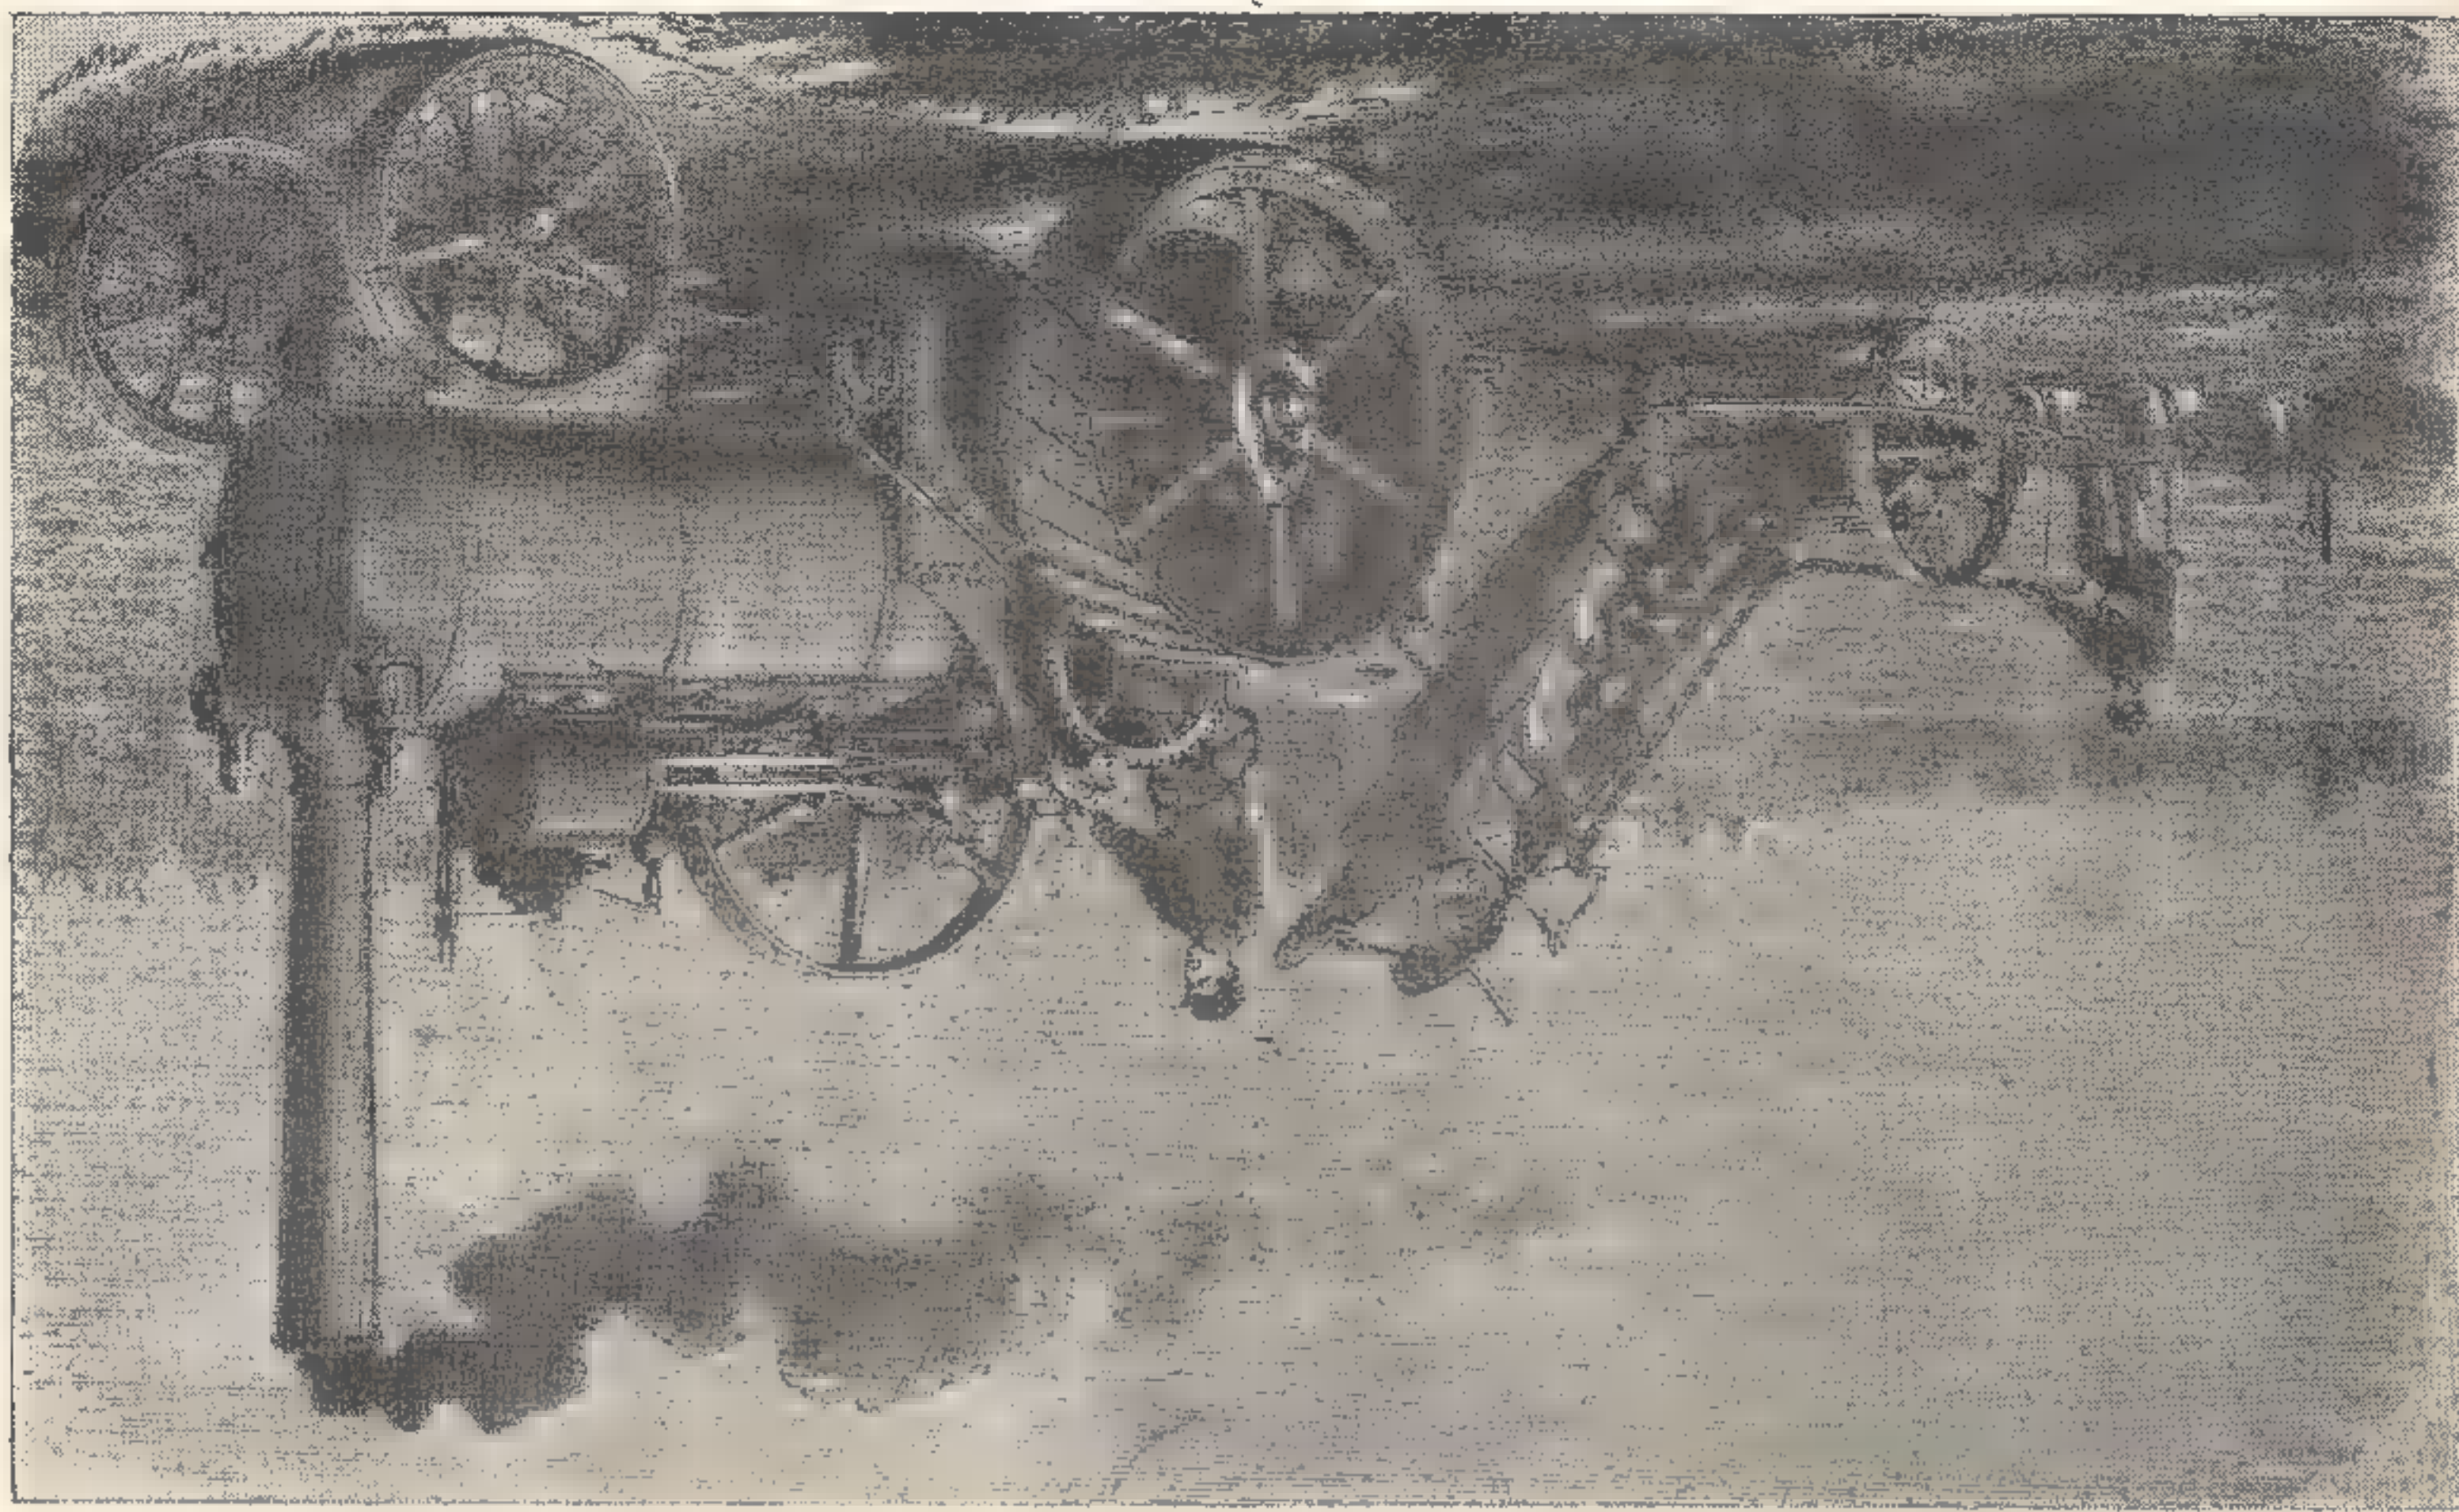

single cylinder of 11-in. bore and 14-in. stroke. (I hope to describe, illustrate, and give drawings of this design in a later article in this series; it would make a most interesting and unusual model.) Another roller was supplied later to the West Point Military Academy.

Reverting to the traction-engines, most of these were of the design, already shown in the first illustration, and among them was No. 916, which forms the subject of the remaining illustrations. It was built in 1873, to the design first introduced by Thomas Aveling at the Oxford Show of the Royal Agricultural Society in 1870. This was his first gear-driven design, with a single speed, and incorporated the celebrated "hornplate" invention, in which the shafts were carried in bearings mounted in the upward- and backward-extended firebox sides, instead of in cast-iron brackets as formerly used.

As mentioned in a previous article, this was a notable advance in traction-engine design, which was soon widely copied or adapted by other makers until its use became almost universal.

From the Builders' Records

Messrs. Aveling-Barford still have the records of engine No. 916, and

Owner Lloyd Burr on the footplate of the eighty-year old Aveling, while Clayton Phillips looks on



these, incidentally, supplied in 1869 to Prospect Park, Brooklyn, and to Central Park, New York, were the first steam rollers in America. They were of similar design to the original Aveling roller of 1867, weighing nearly 30 tons, with a single-acting

engine was more than powerful enough to drive the largest size threshing machine, and that it could easily haul fifteen tons along moderate roads and up steep inclines. Examples are quoted from New Jersey to Ohio of Aveling engines being used for such diverse uses as hauling broken stone for road making, drawing logs out of the woods, threshing grain, and hauling twelve to fifteen tons of pork in the streets of Cincinnati.


A later issue of the same journal, dated August 22nd, 1874, mentions that the Aveling engines were of twelve horse-power (American rating), with a steam-jacketed cylinder of eight by ten inches (i.e., six nominal horse-power by British standards—W.J.H.), and a lagged and felted boiler with 120 feet of heating surface. "The entire cost per day of running the engine, including fuel, labor, oil, etc., does not exceed six dollars, and when hauling, the rate of speed per hour can be continued at three miles."

New York Importer

It is stated that the total cost in New York of a complete farm locomotive, four-furrow plough, and all appliances ready for work did not exceed \$3,600 gold, the engine without the plough costing considerably less.

Aveling and Porter's representative in America was William Churchill Oastler, of New York, and he imported quite a number of engines, including road rollers. Two of

In this view, points to note are the wooden fore-carriage, method of hinging and fastening the smokebox door, and steam-pipe arrangements

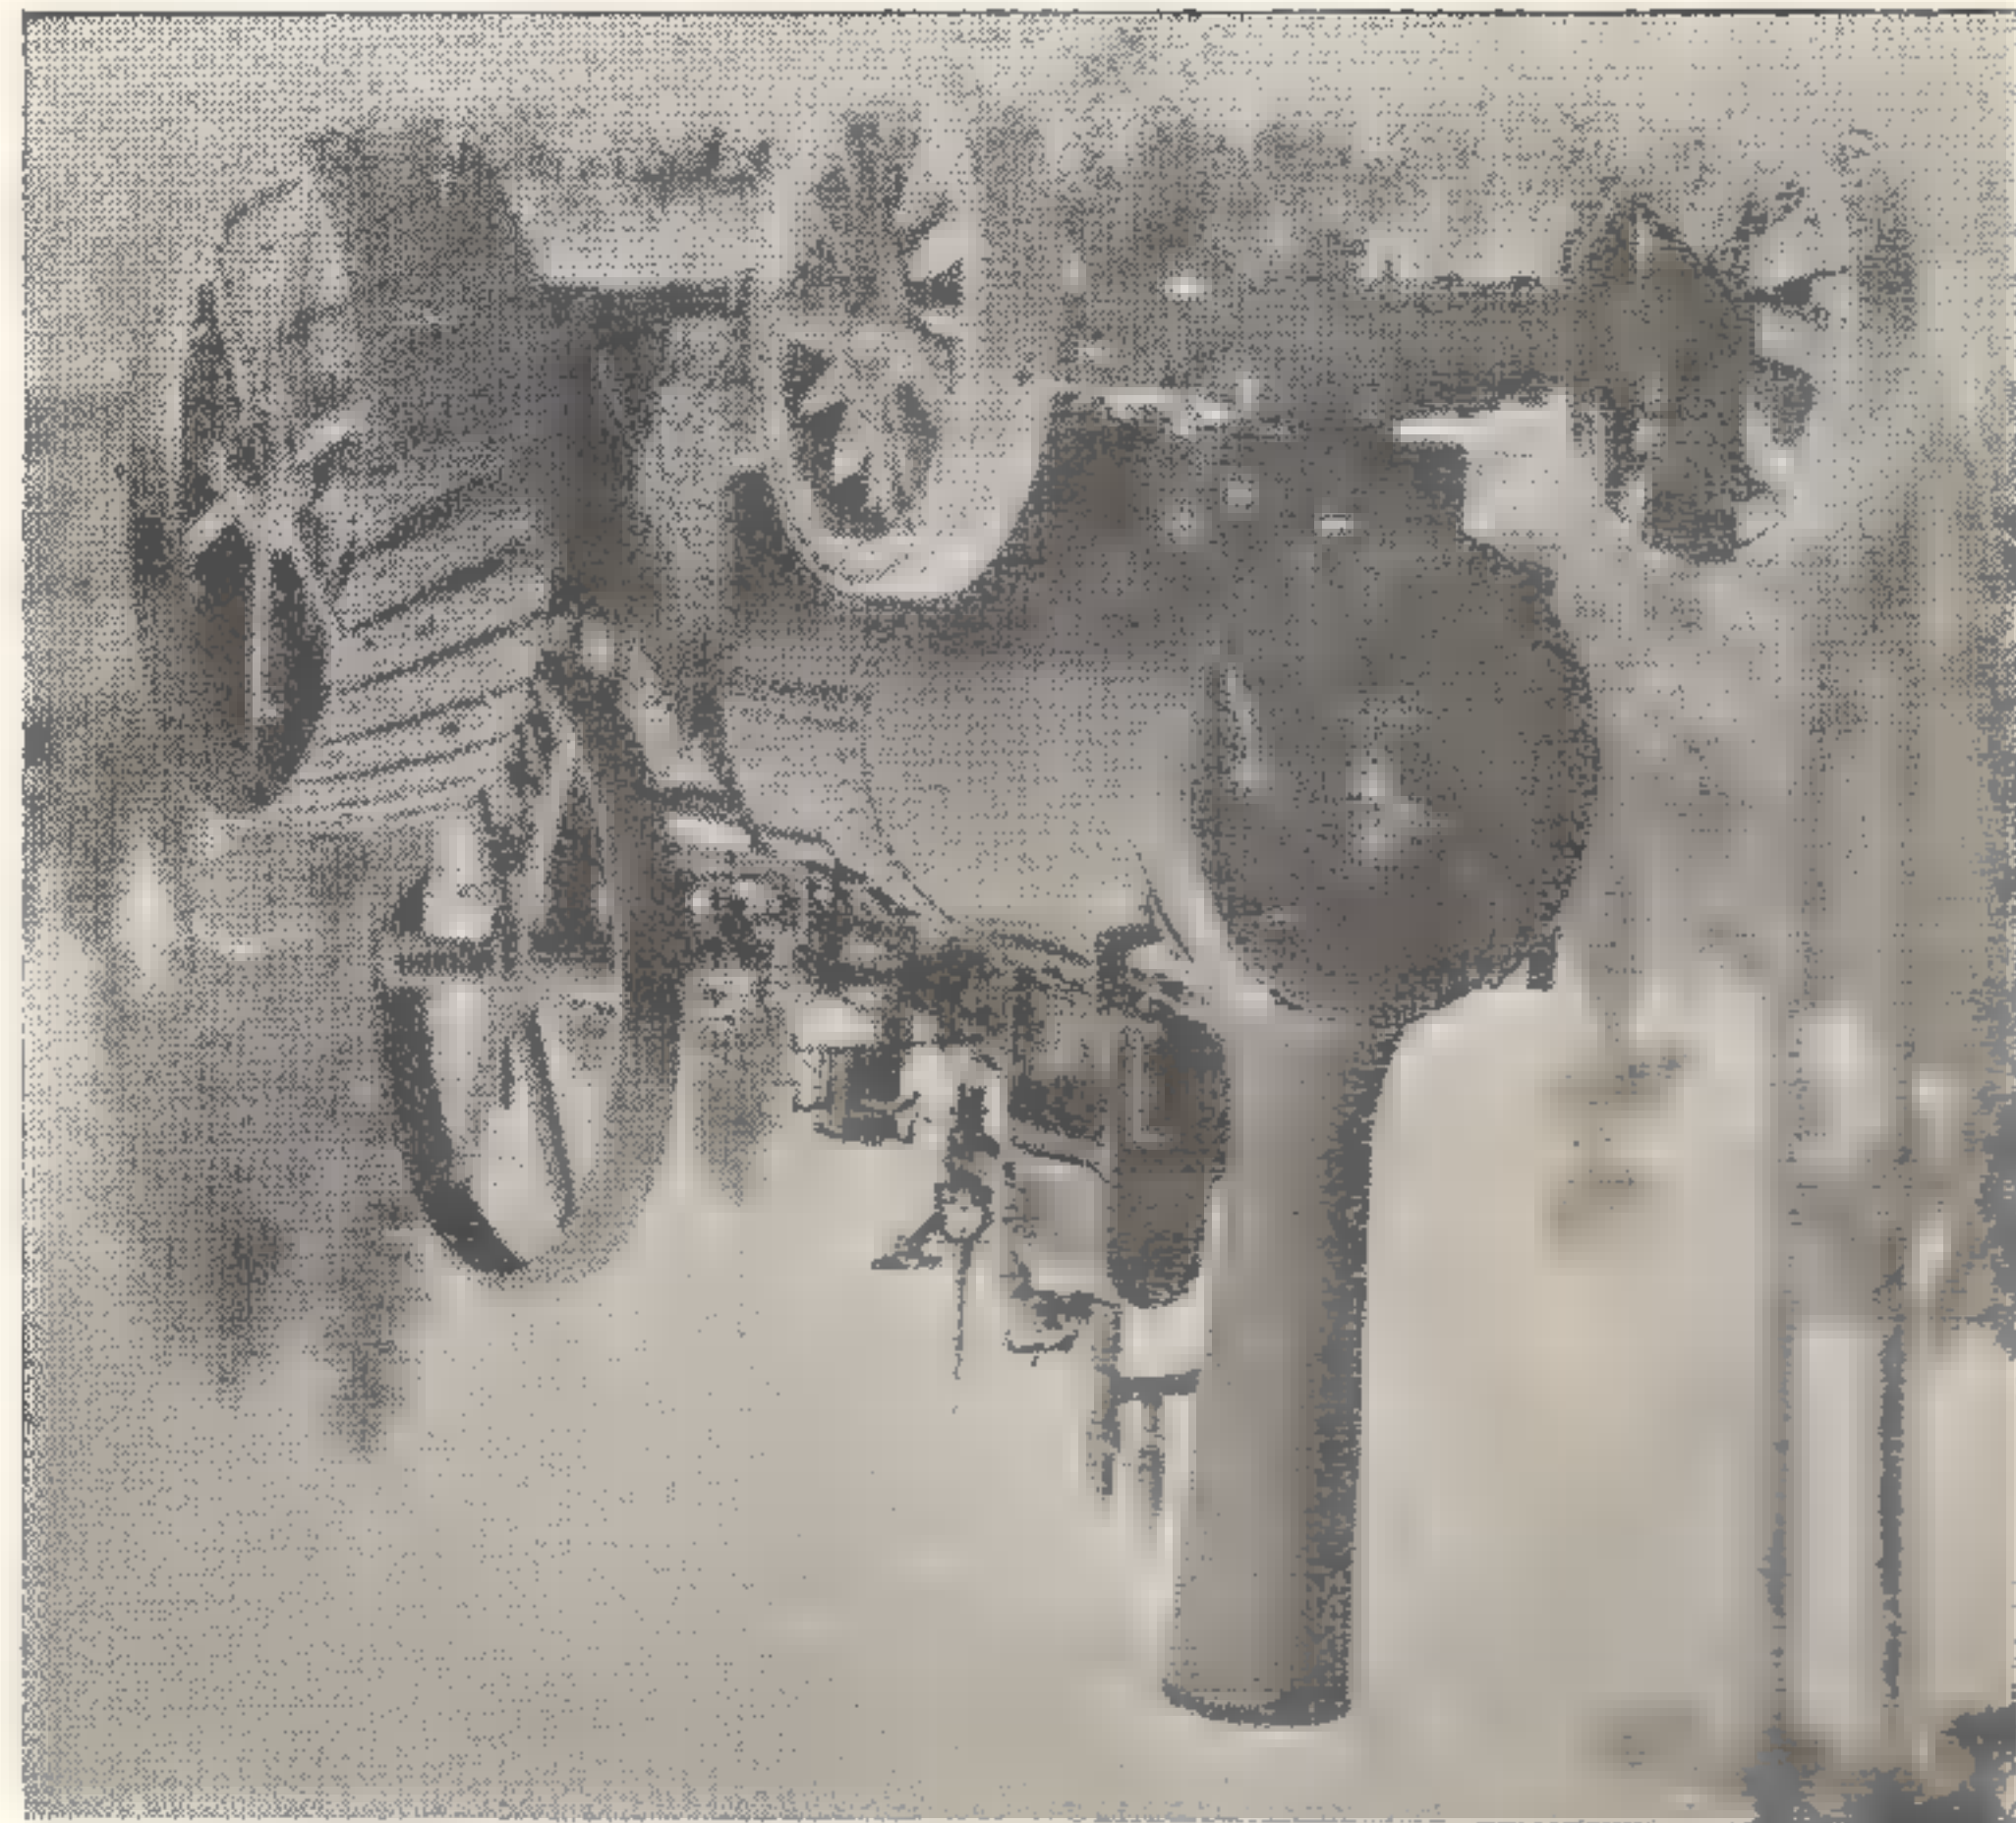

These give the following particulars. The hind wheels are 5 ft. 6 in. in diameter and 16 in. wide; the front wheels are of wood, 3 ft. by 5 in. Cylinder is 8 in. by 10 in., with a direct-acting governor (more of this anon) and a double steam dome. The fore-carriage is wood, with a wooden tool-box in front. Perch-bracket, turntable, and through-pin are wrought-iron. Spur-wheel gearing is fitted, with a wrought-iron guard; there is no compensating-gear, but the brake is "improved," with wood segments. Hind-axle bearings are white-metal in cast-iron brackets; the second-shaft brackets are gunmetal on the driving side and cast-iron on the flywheel side. To the latter was bolted the water-pump, which was fitted with a 1½ in. diameter plunger. The chimney was wrought-iron with a cast-iron base.

Present Owner

It is not known to whom the engine was sold by Mr. Oaster, nor through whose hands she subsequently passed, but she was found a few years ago in the back-woods of California by Mr. Lloyd Burr, a professional engineer. She had been driving a saw-bench for many years, but would undoubtedly have been scrapped before long. Mr. Burr promptly bought her for preservation, to keep company with his huge 110 h.p. Best logging engine of 1906.

Both engines are being kept at the Phillips Brothers saw-mill in the Sacramento Valley, California. Incidentally, these four brothers are themselves keen steam enthusiasts, and run the mill with nothing but steam-engines rescued from old mills in the "logged-off" areas of the valley. They themselves possess at least two of the Best giants. Mr. Burr intends to restore the old Aveling to her original condition.

Points of interest here are single safety-valve (in line with steam-pipe), two whistles, regulator arrangement, remains of Pickering governor, main bearings, and clamp on crankshaft.




as imported, as far as possible, but after all the intervening years. If the reader compares the photo-graphs with the engraving, he will notice that one or two major alterations have been made. For example, the steam connections have been considerably altered. In the original, steam passed from one compartment, over which double safety-type safety-valves were fitted, direct to the regulator-valve, and a slow-speed Watt-type governor controlled the engine speed.

But in the "improved" version, a single enclosed safety-valve is mounted on top of the dome, and complicated and unsightly arrangement of pipes and elbows takes the steam from the dome, via a screw-down valve and swivel regulator-valve to an external Pickering governor, from which a further elbow and pipe takes the steam to the front of the valve-chest. An alteration of the exhaust arrangement is also evident.

Boiler lagging is now non-existent, and the chimney is not the original (as may well be expected). It does have a distinct Aveling appearance, but the original had a cast-iron base only (with rectangular, not oval flange), and was taller and more slender.

The front wheels, too, are probably replacements. In any case, they have been well "botched-up," and are very weak and wobbly after standing out in mud on long pumping job. Mr. Burr intends to rebuild them, however, in seasoned oak and hickory—in fact,

Lloyd Burr on the footplate. Note water-filling pocket, construction of standard draw-bar, and special draw-bar beneath for steam-ploughing

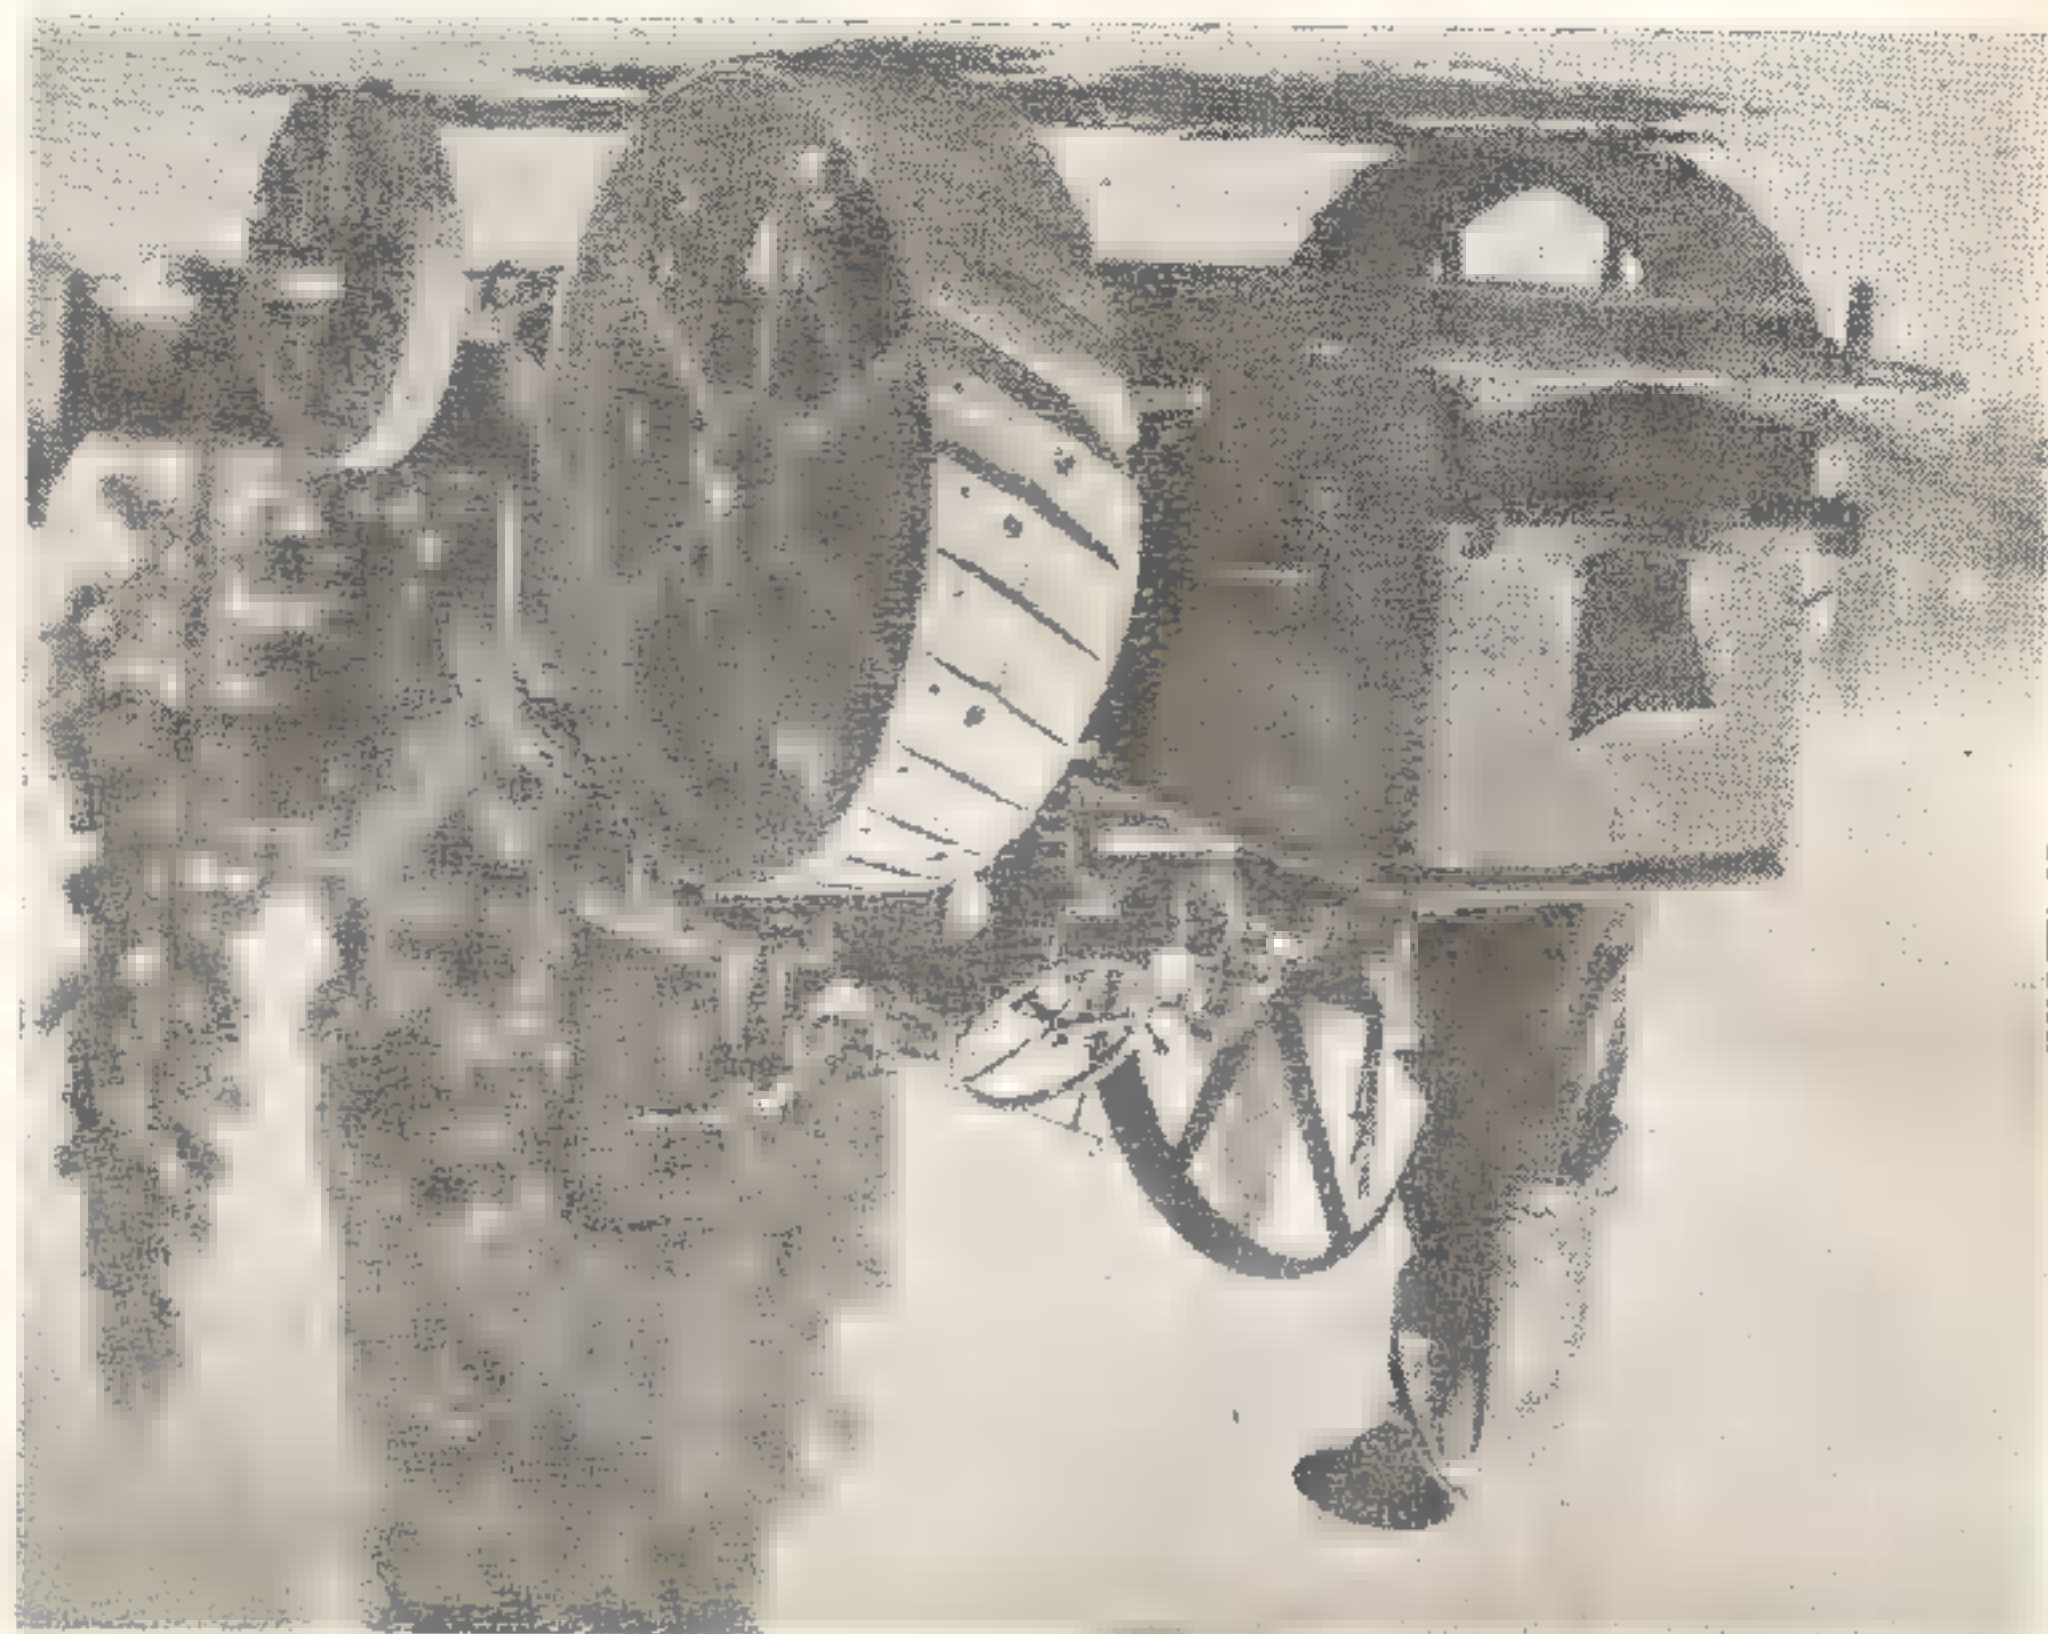

Switzerland's Amazing Railways, by C. J. Allen. (Edinburgh: Thomas Nelson & Sons Ltd.). 180 pages, size 6½ in. by 9½ in. 47 illustrations. Price 25s. net.

Mr. Cecil J. Allen needs no introduction to readers of railway literature; his many books and thousands of articles are known wherever the English language is understood, and it can be no exaggeration to claim that he is one of the most widely read of authors in his particular field. But here is a book that, in many ways, is different from any previous book from his prolific pen. Switzerland's network of railways is comparatively young, and because of the unique and often daring nature of the engineering skill, ingenuity and enterprise involved in the planning, construction and operation of the railway system, quite apart from the spectacular nature of the terrain, it is an ideal subject for an author gifted with the power of adequate descriptive writing; and Mr. Allen has risen nobly to the task of presenting his readers with an engrossing historical and factual record of what is probably for its size the most remarkable railway organisation in the world. The text is lucid to a degree, easy

and frequently entertaining to read, and at the same time avoids purely technical and statistical information, except when it is absolutely necessary. Even without the aid of illustrations the reader can visualise most of the engineering and technical problems that had to be overcome, and can appreciate the special features that are inherent to the railways as they are. But the illustrations included in this book, and there are nearly two hundred of them, are superb; some of them are of almost breath-taking beauty, and all of them point directly to the engineering achievement that the railways themselves immortalise. This is a book that should not be missed by railway enthusiasts anywhere.

Diesel Locomotives. (London: "The Times Weekly Review"). 20 pages, size 8½ in. by 5½ in. Price 1s. We have received a copy of this booklet which contains brief particulars and ten photographs of British diesel locomotives, diesel railcars and the first gas-turbine locomotive to run on British Railways. The subject is well covered in the brief text, and most of the illustrations show the locomotives at work. Copies may be obtained

from "The Times Weekly Review," E.C.4. Printing House Square, London.

The World's Great Bridges, by H. Shirley Smith. (London: Phoenix House Ltd.). 180 pages, size 5½ in. by 8½ in. Price 15s. net. Of all the great engineering structures fabricated by man, none is more impressive than a massive bridge. There can be little doubt that in bridges the engineer has displayed his greatest ingenuity, audaciousness and courage, and no thinking person can fail to realise this and be duly impressed with the idea when looking at a bridge. This new book by one who is, perhaps, the greatest designer of bridges in our time, relates the story of bridge-building from the earliest times. The historical account is extremely interesting and leads into descriptions of the great bridges that have since been built in various parts of the world. There are forty-three half-tone illustrations and twenty-four line drawings by R. J. Mainstone. The final pages are devoted to a useful and comprehensive index. The book bids fair to become the most important non-technical treatise in its subject.

FOR THE BOOKSHELF

they will probably be done by now. Strictly speaking, the "rampant horse" insignia is out of keeping too, being the heraldic version adopted by Aveling's in 1935, after seventy

Lloyd Burr admires his "modern" rampant horse insignia, which he removes after each run to prevent its disappearance!



Similar Engine in Britain It will probably be news to many

between the pinion and the collar at the end of the shaft.

which may be seen by a steel clamp, has been replaced On No. 916 this round the shaft, which was buckled of a leather strap of gear by means cranked shaft was ing pinion on the original, the drive noted. On the reference may be One other dif-

direct. Aveling-Barford from Messrs. tained the new one ing, and he ob- insignia was miss- the old acquired the en- version. But years of the older

readers that an Aveling engine of this period is being preserved in Britain. It was presented to the Road Locomotive Society by the late P. J. Hoseason, and for some time was kept at Maidstone in Kent. Recently, however, it was presented by the society to the Science Museum, and I understand that after being thoroughly reconditioned—which will probably take some time—it will take its place in the Road Transport section there. Another historical exhibit of a similar nature is now in the City of Birmingham Museum. It is an Aveling and Porter roller of a rather later date; and this, too, has been overhauled, rebuilt, and repainted until it is probably better than new. I have not seen it myself yet, but at the recent "M.E." Exhibition, Mr. A. J. Kent was kind enough to show me some photographs which certainly whetted my appetite. The museum authorities are to be congratulated on their foresight in securing this engine, and on their enterprise in having such a magnificent job made of her reconditioning.

mobile crane, but it can be slewed by hand on its baseboard. To simplify the driving, neither clutch nor brake gear is fitted, crank-shaft and winch drum being permanently connected. Only two handles are needed, throttle and reverse lever, so all that the young crane driver has to do, is to move the reverse lever either up or down, according to whether he wants to lift or lower, and give her steam. There is, of course, no objection to anybody adding refinements if they so desire.



the window-sill. It is cut to the rock-bottom of simplicity, for reasons of cost, ease and speed of construction, and to enable it to be operated by any kiddo who can strike a match without risking burnt fingers. The crane is of the stationary type, as used on wharves, loading docks, etc., before the advent of the i.c.

ONCE again, I have received sundry exhortations to put something in for the kiddies' Christmas present, soon enough for it to be finished by the time Santa Claus is ready to deliver; so here is the needed. This year the suggestion is for a little steam crane, which can be operated from the table or

A SIMPLE STEAM CRANE

CHRISTMAS PRESENT
FOR THE KIDDIES

L.B.S.C.'s

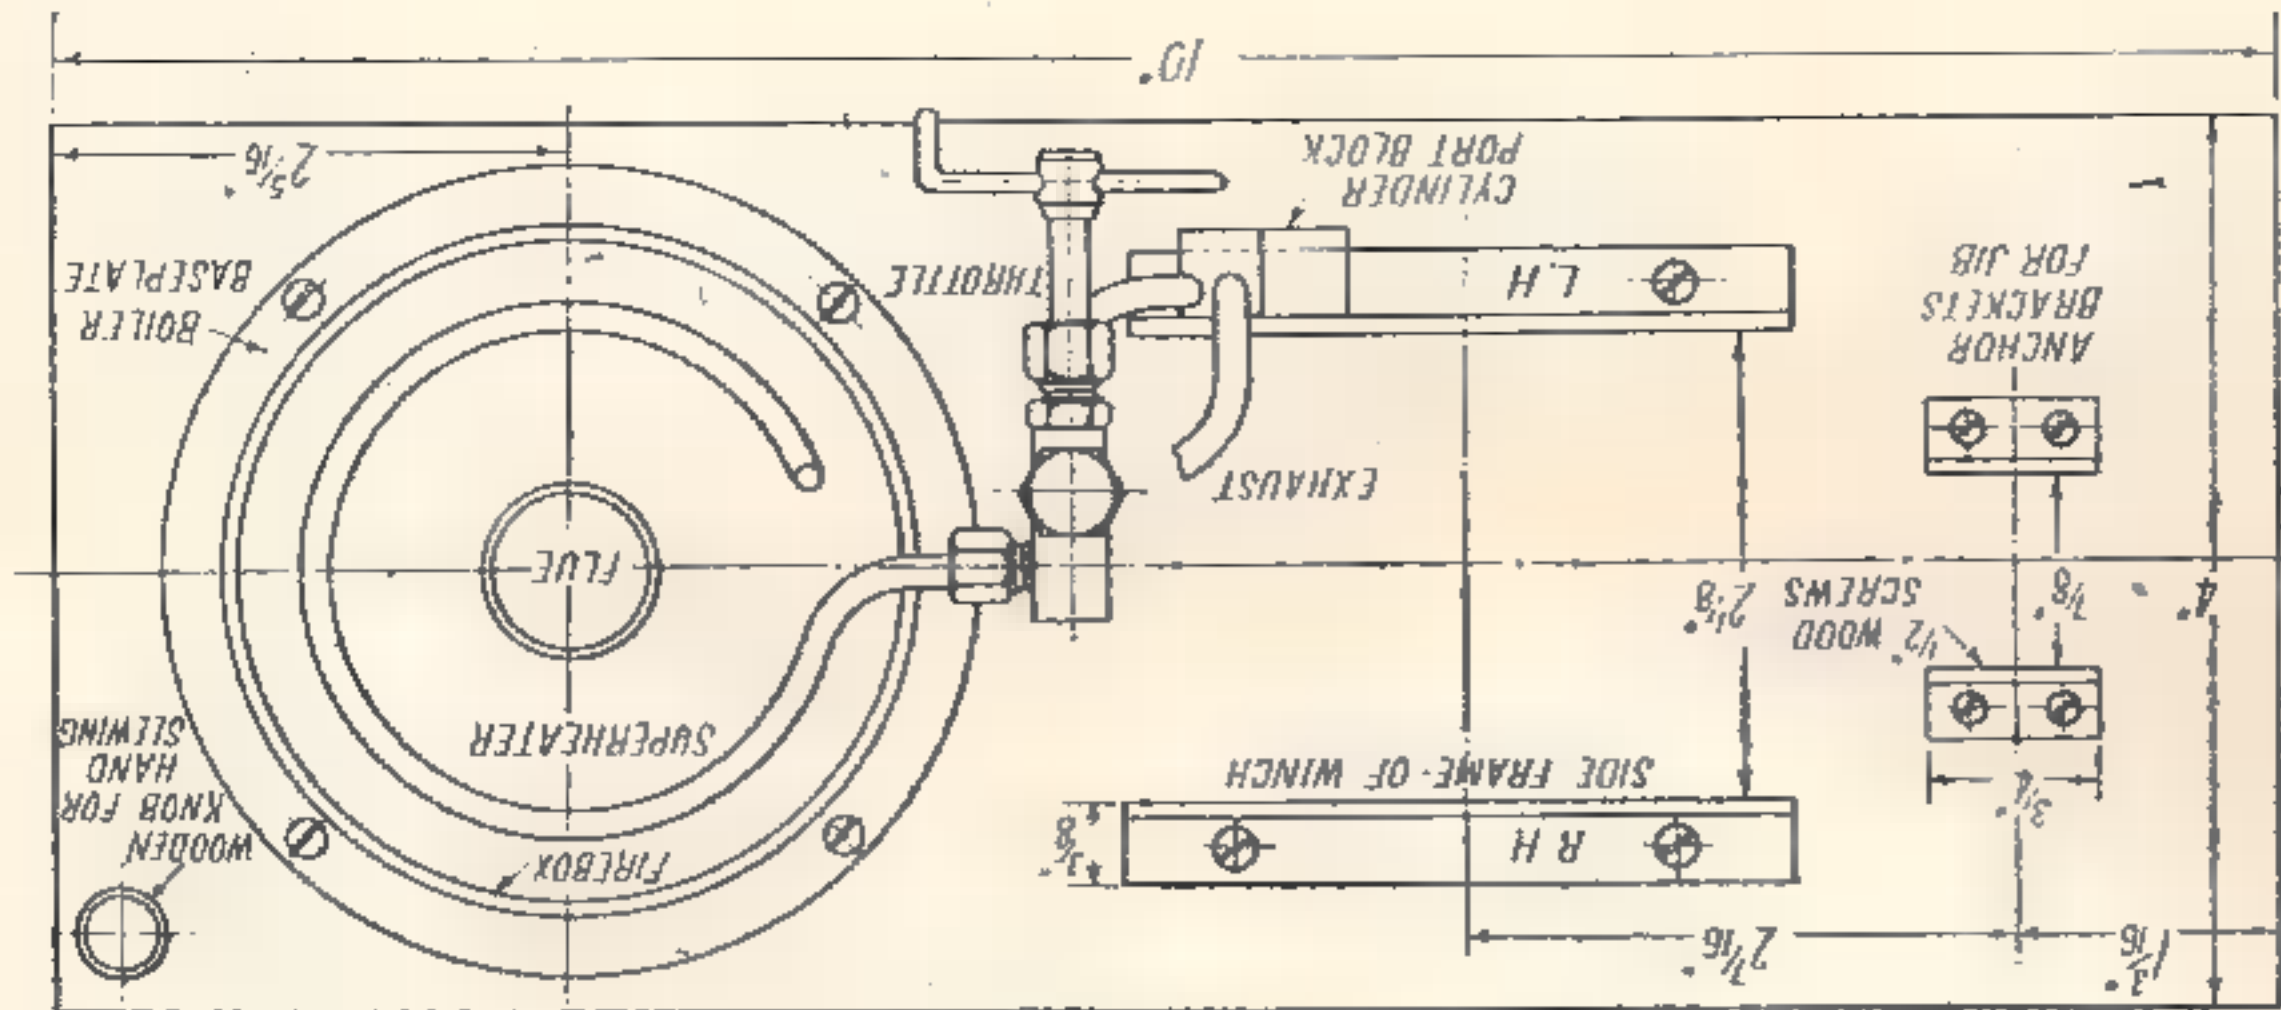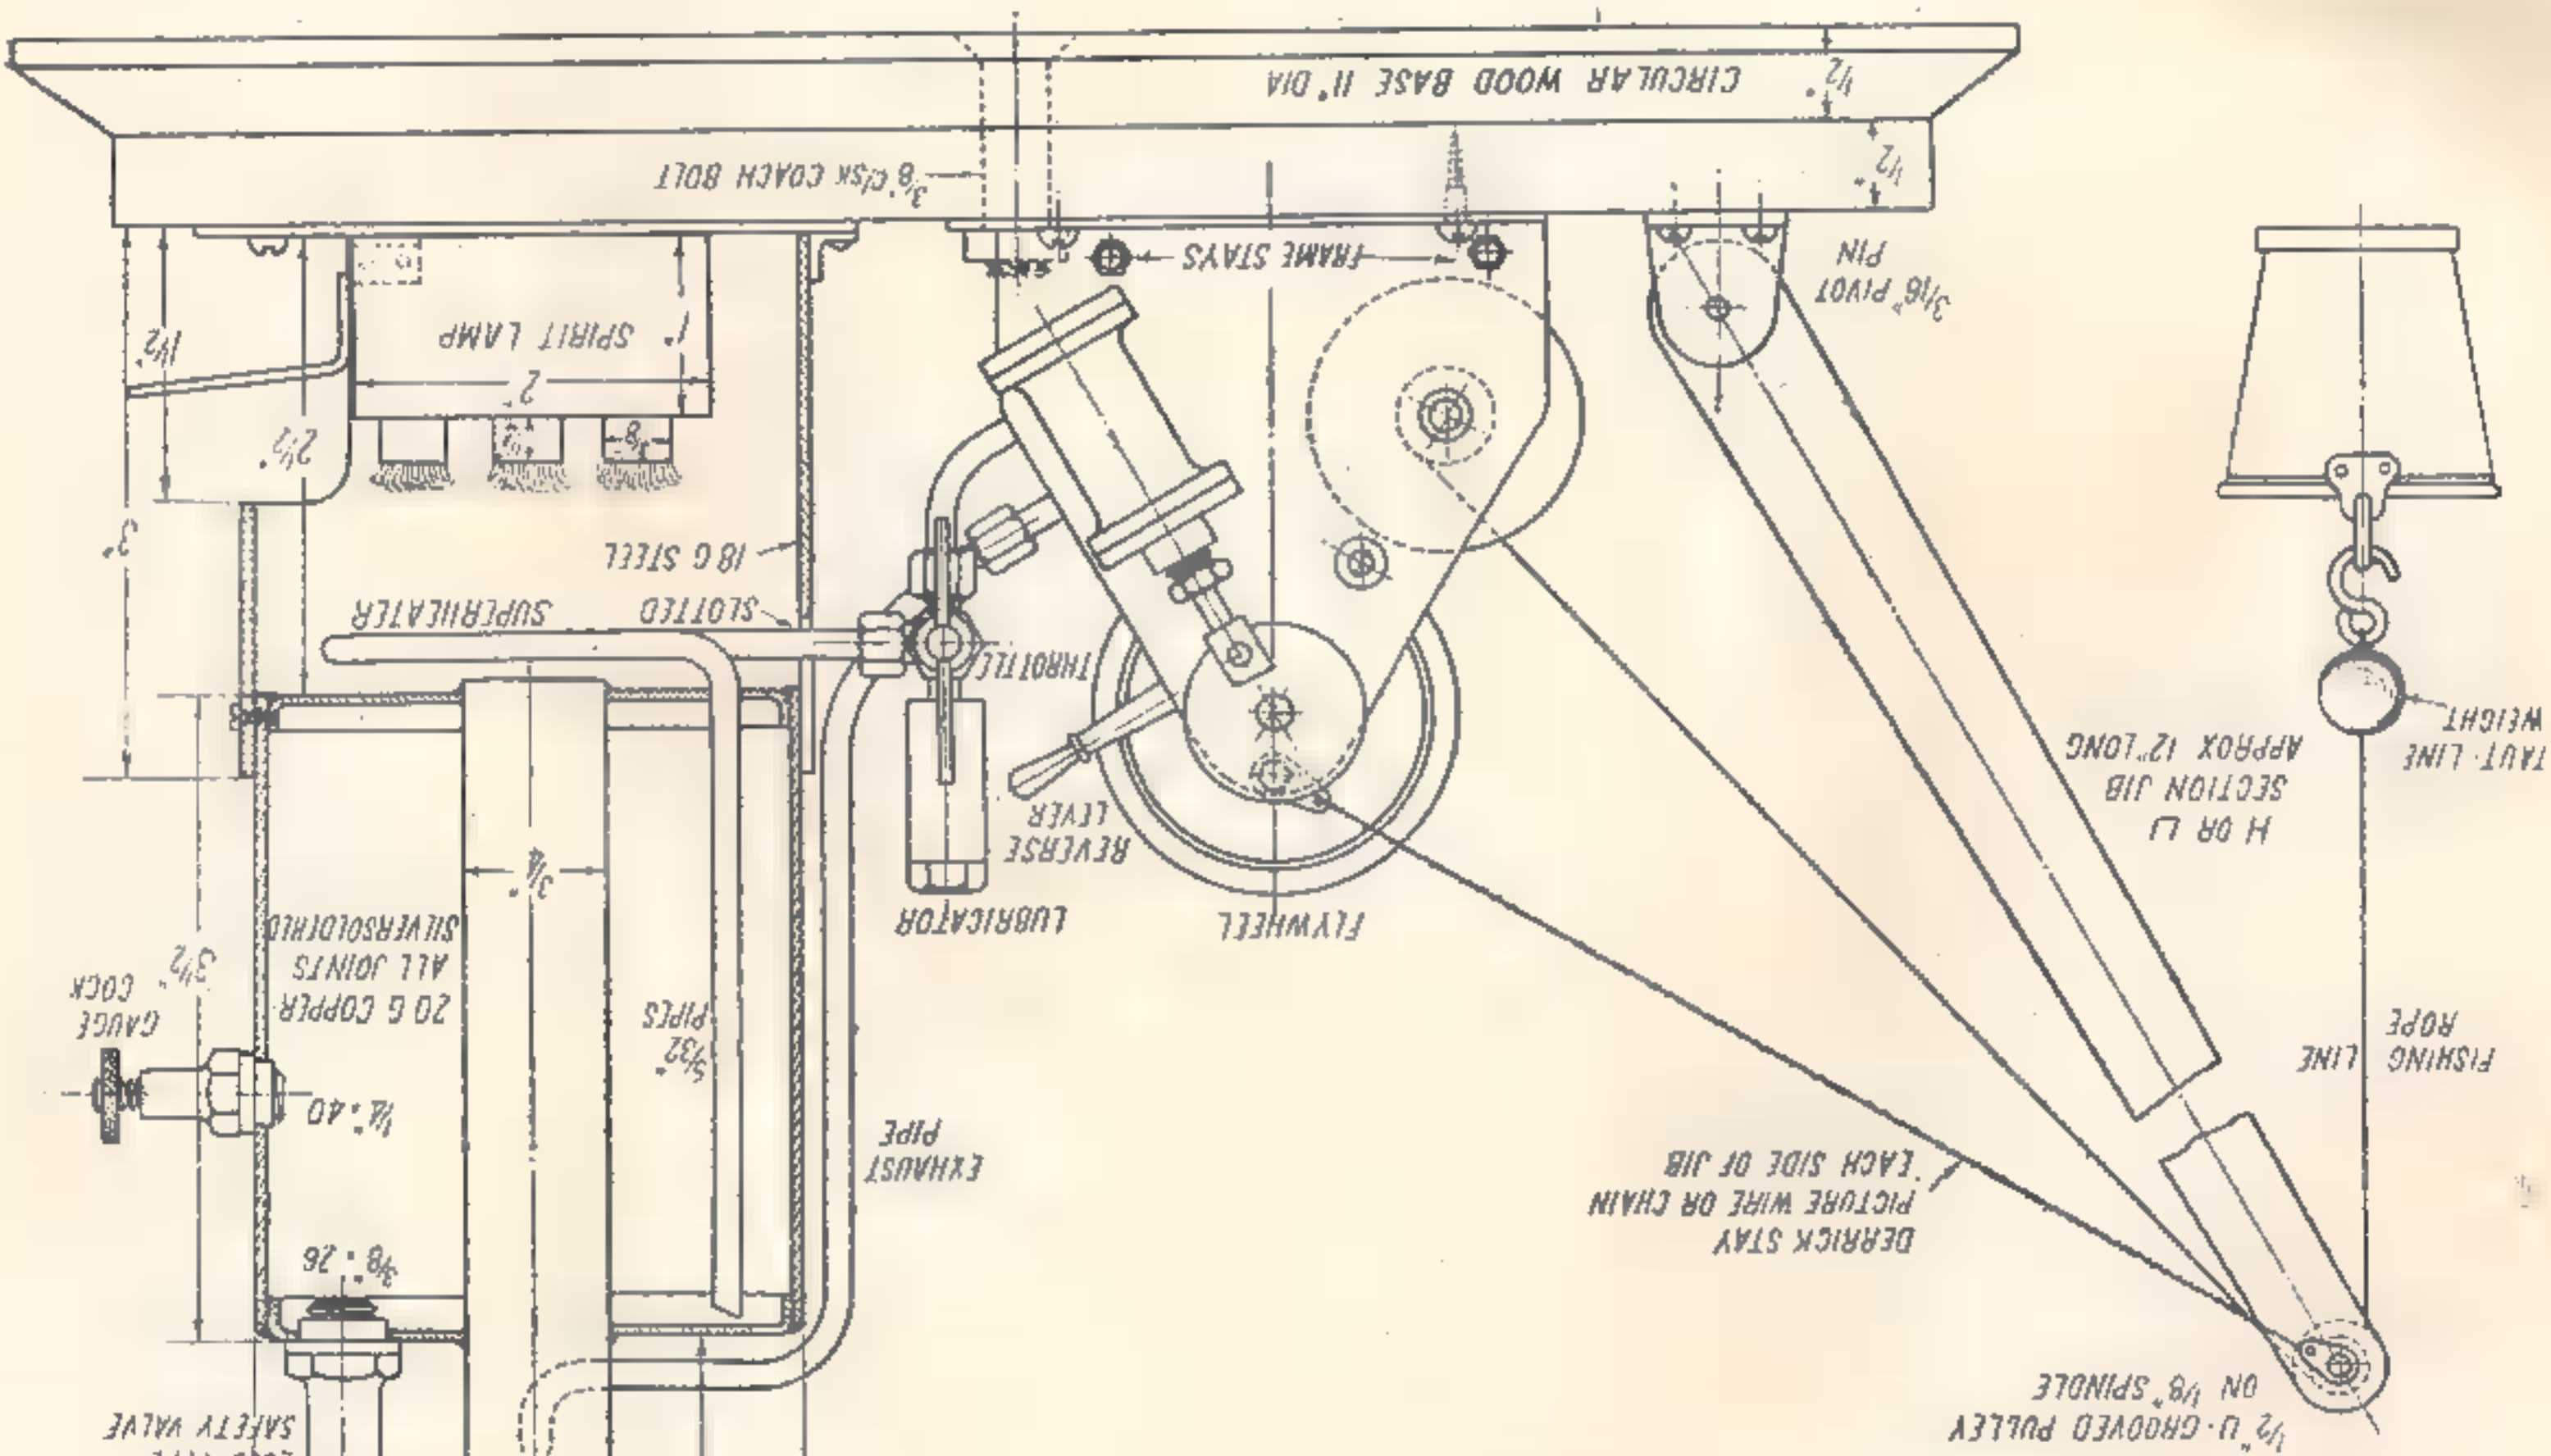


General arrangement and part plan for a simple steam crane

The whole doings is erected on a circular baseboard about $\frac{3}{4}$ in. thick, and 11 in. diameter; a turned and bevelled hardwood one would look very pretty, but isn't essential. Drill a $\frac{3}{8}$ -in. hole in the middle, and countersink it underneath. The crane baseboard, measuring 4 in. \times 10 in. \times $\frac{1}{2}$ in. thick, also has a hole in the middle; and a $\frac{3}{8}$ -in. counter-sunk coachbolt goes through the lot, the nut and washer being adjusted so that the upper board can turn on the lower, without slackness. A thin circular metal plate 4 in. diameter, could be put between the two rubbing faces if desired. Screw a small wooden drawer-knob in one corner, for the

Baseboard and Boiler


triangular frame carrying the gears and winding drum. The jib, made from channel or H-section metal, is pivoted at the bottom, and stayed by guy wires attached to the stay at the top of the winch frame. Hand derricking could easily be arranged, but it isn't necessary in the present case. The cylinder and winding drum can be made from castings, or built up; gear wheels from a broken clock or gramophone, will do just as well as the most expensive kind that could be bought or made. There is no need to keep exactly to the wheel sizes given, as the distance between centres of the shafts, can be varied to suit whatever wheels may be available. Very little detailed description is needed, the drawings being self-explanatory, so I won't inflict a long-drawn-out rigmarole on prospective builders!

Plan of burners

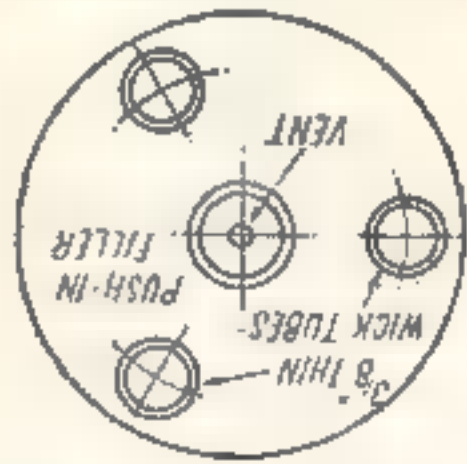

The boiler is of the single-flue vertical type, with no water-space around the firebox. It is made from thin copper, with silver-soldered joints, and will come to no harm if the kiddies run it dry. The firebox is just a piece of sheet metal bent to a circle, and the firing is by a spirit-lamp. The boiler fittings are only what will be absolutely necessary. The motive power is a double-action oscillating cylinder, with a reversing-valve on the back; steam is regulated by a screwdown valve with a lubricator fitted integral. The cylinder is mounted on a

Inside of L.H. winch frame

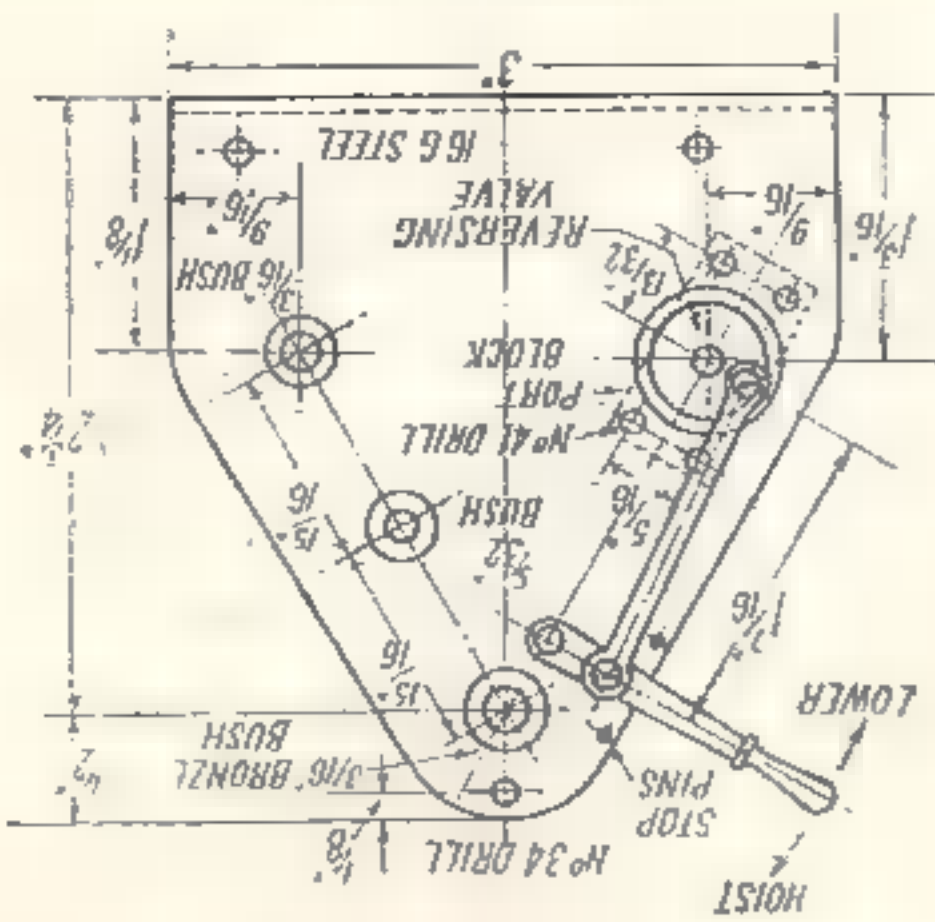


are cut out together from $\frac{1}{8}$ -in. The triangular winch frame-plates for handling when hot.

For handling when hot, middle, also a "saucapan handle," fit a push-in filler with a vent in the or from stout tin, and soldered; thin sheet iron or steel, and brazed, as shown. It can be made from a circular tank with three burners, fired by a spirit-lamp, consisting of 30 lb. pressure. The boiler is reamed seating, set to blow off at $\frac{1}{2}$ in. with a $\frac{5}{32}$ -in. ball on a $\frac{1}{8}$ -in. of the regular locomotive-type pattern, with a safety-valve is exactly the same as a water-gauge which isn't really a cock at all—is as shown in plan. The test cock—the baseboard by four wood screws, pieces of $\frac{1}{4}$ -in. \times $\frac{1}{16}$ -in. angle, riveted to the firebox is attached to it by three of 18-gauge steel, $3\frac{1}{2}$ in. diameter. The baseplate is a circle jointing on them, will prevent any for the threads; a smear of plumbers' shown, which gives plenty of hold screws put through the flange as It is attached to the boiler by brass in it to allow the lamp to be inserted. gauge steel, and has a 2 in. gap cut The firebox is rolled-up from 18-soldered at one heating.

whole bag of tricks can be silver-the projecting end, as shown. The hole in the bottom plate. Fit a copper tube, and poked through a heater is bent up from $\frac{5}{32}$ -in. combined steam-pipe and super-for safety-valve and test cock. The shown. Two bushes are needed, as \times 20-gauge copper tube, fitted as modate the flue, which is of $\frac{1}{4}$ in. $\frac{1}{8}$ -in. hole in the middle, to accom-and are a tight push fit. Each has and riveted. The ends are flanged, from sheet copper of similar gauge, 20-gauge copper tube, or rolled up 3 in. diameter, can be made from The boiler shell, $3\frac{1}{2}$ in. high and load.

kiddy to grab when slewing the

Outside of R.H. winch frame

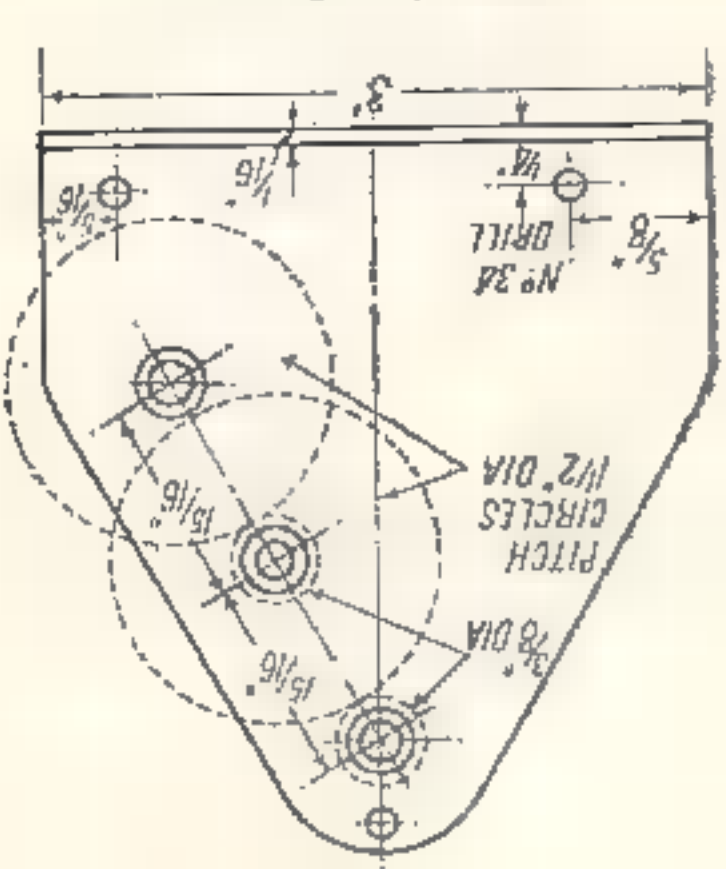

The double-action oscillating cylinder is $\frac{1}{8}$ in. bore and $\frac{1}{2}$ in. stroke. It is bored and and faced, the port-

Engine

arranged to suit. reason, if the shaft centres are gear wheels can be used, within cylinder. As mentioned above, any owing to the crane only having one other. The flywheel is needed, and a pinion and flywheel at the with a 1-in. disc crank at one end, is $\frac{1}{8}$ in. diameter and $4\frac{1}{2}$ in. long, from side-slipping. The crankshaft at the other end, to prevent the shaft cranks. A collar will be needed the drive from the pinion on the fixed another big wheel for taking the drum spindle. Alongside it, is diameter, and carries a $\frac{3}{8}$ -in. pinion, for meshing with the gear wheel on the drum spindle. The intermediate shaft is $\frac{5}{32}$ in. setscrewed to the drum spindle.

large gear wheel can be pinned or end of the hoisting rope. The shown by dotted lines, to take the the barrel, and counterbore it as put through it. Drill a hole through plugged, and a $\frac{1}{8}$ -in. steel spindle serve, if the hole in the middle is each end. Even a cotton-reel would 3/32-in. plate, silver-soldered on at from $\frac{1}{8}$ -in. tube, with discs cut from nuts. The winch drum can be are fixed with ordinary commercial diameter, and screwed 6-B-A. They about $\frac{1}{8}$ in. length, to $7/64$ in. the ends being turned down for are made from $\frac{5}{32}$ -in. steel rod, being on the inside. The stay rods rod, and squeezed in, the flanges turned from bronze or gunmetal board, as shown. The bushes are over for attachment to the base-block. The bottom edges are bent securing the distribution or port plate, and four holes for the reversing-hole is needed for the reversing-and the bush holes $\frac{1}{8}$ in. A $\frac{3}{8}$ -in. drill the stay holes with No. 34 drill, steel, just like locomotive frames;

completed winch is attached to the baseboard by wood screws, as shown.

Throttle and Lubricator

Steam is controlled by a simple screw-down valve, the handle of which is far enough away from it, to avoid burning tender fingers, and big enough to allow of easy operation. The valve is very similar to the type described in a recent lobby-chat, having a separate section to carry the valve-pin. The body is a 3-in. length of 1 1/2-in. round or hexagon rod; chuck in three-jaw, face the end, centre, drill down for 1 1/8 in. depth with 3/32-in. or No. 41 drill, open out and bottom to 1 1/8 in. depth with 7/32-in. drill and D-bit, tap the end 7/8 in. x 40 and make a gland fitting to suit, as shown. Tap this for 5/32-in. x 32 pin. At 1 1/8 in. from the tapped end, drill 5/32-in. hole right across; and at 1 1/2 in. from the blank end, drill 1/2 in. from the blank end, drill another at right-angles. This one should break into the small hole. Fit 1/2-in. x 40 union nipples into two of them, as shown; the lubricator goes into the third.

The lubricator is just a plain oil cup, made from 3/8-in. round rod, turned to the shape and dimensions shown, and fitted with a screwed cap. The stem is turned a tight fit for the hole in the valve body, and from 1/8-in. x 1/16-in. steel strip. The stop pins, which are made from 1/8-in. wire screwed into the winch frame, are set so that when the lever is in the upper position, one of the curved grooves in the reversing-valve bridges the steam port (bottom) and one of the side ports, whilst the other groove bridges the exhaust port (top) and the other side port. Shifting the lever to the lower position, should move the reversing-valve a quarter-turn, the grooves then bridging the opposite ports, and reversing the engine. The

one side of the valve, and run them into two sausage-shaped grooves, by aid of a small chisel. On the back, drill and tap 9-B.A. hole for the screw for connecting to the rod from the reversing lever. This should come in the thick part between the grooves. Face the grooved side truly, as above.


Temporarily clamp the port block to the outside of the l.h. winch frame, in the position shown by the dotted lines in the illustration; run the 41 drill through the holes in the frame, making countersinks on the port block. Remove block, drill the countersink with No. 48 drill for 1/8 in. depth, tap 3/32 in. or 7-B.A., and attach the block to the frame by cheese or roundhead screws. Warning: the screws must not pierce the passages, so watch your step when drilling and tapping.

The cylinder can then be erected, with the trunion-pin going through the hole in the block. Put on the reversing-valve, and secure with 19-gauge steel spring and nut. Make a lever, in the way as described for locomotive reverse levers, and pivot it on a small shouldered screw in the left-hand winch frame, as shown; connect the lever to the screw in the back of the reversing-valve, by a link made from 1/8-in. x 1/16-in. steel strip. The stop pins, which are made from 1/8-in. wire screwed into the winch frame, are set so that when the lever is in the upper position, one of the curved grooves in the reversing-valve bridges the steam port (bottom) and one of the side ports, whilst the other groove bridges the exhaust port (top) and the other side port. Shifting the lever to the lower position, should move the reversing-valve a quarter-turn, the grooves then bridging the opposite ports, and reversing the engine. The


face machined, and the covers turned, in exactly the same way as described for locomotive cylinders. The gland is made from 1 1/8-in. hexagon rod. The piston is turned from drawn bronze or gunmetal rod, and the piston-rod is 3/8-in. rustless steel or bronze. The big-end is a plain block, drilled for the crank-pin, and screwed on to the end of the piston-rod. The trunion-pin is 3/8-in. round steel; take good care to have this dead square with the rubbing faces.

The distribution block, or port block, is a piece of bronze or gunmetal rod 1 in. long, 1/2 in. wide and 3/8 in. thick. Face off both sides, and drill a No. 30 hole through the middle. Be mighty careful about marking out and drilling the ports and passages correctly. Drill the two longitudinal holes first, at 3/32 in. from one face, and 5/32 in. each side of centre. Next, drill the four ports so that they break into them. At the side, as shown, 3/32 in. from the edge, and 5/32 in. each side of centre, drill 3/32-in. holes 1/2 in. deep, open with No. 30 drill to 3/4 in. depth, and tap 5/32 in. x 40, as shown by the dotted lines. Now turn the piece over, and drill the four holes shown in a circle. The two at the sides, are drilled through into the longitudinal holes connecting the ports; the top and bottom ones break into the holes reversing-valve, by a link made from 1/8-in. x 1/16-in. steel strip. The stop pins, which are made from 1/8-in. wire screwed into the winch frame, are set so that when the lever is in the upper position, one of the curved grooves in the reversing-valve bridges the steam port (bottom) and one of the side ports, whilst the other groove bridges the exhaust port (top) and the other side port. Shifting the lever to the lower position, should move the reversing-valve a quarter-turn, the grooves then bridging the opposite ports, and reversing the engine. The

ports in the back of the block, on

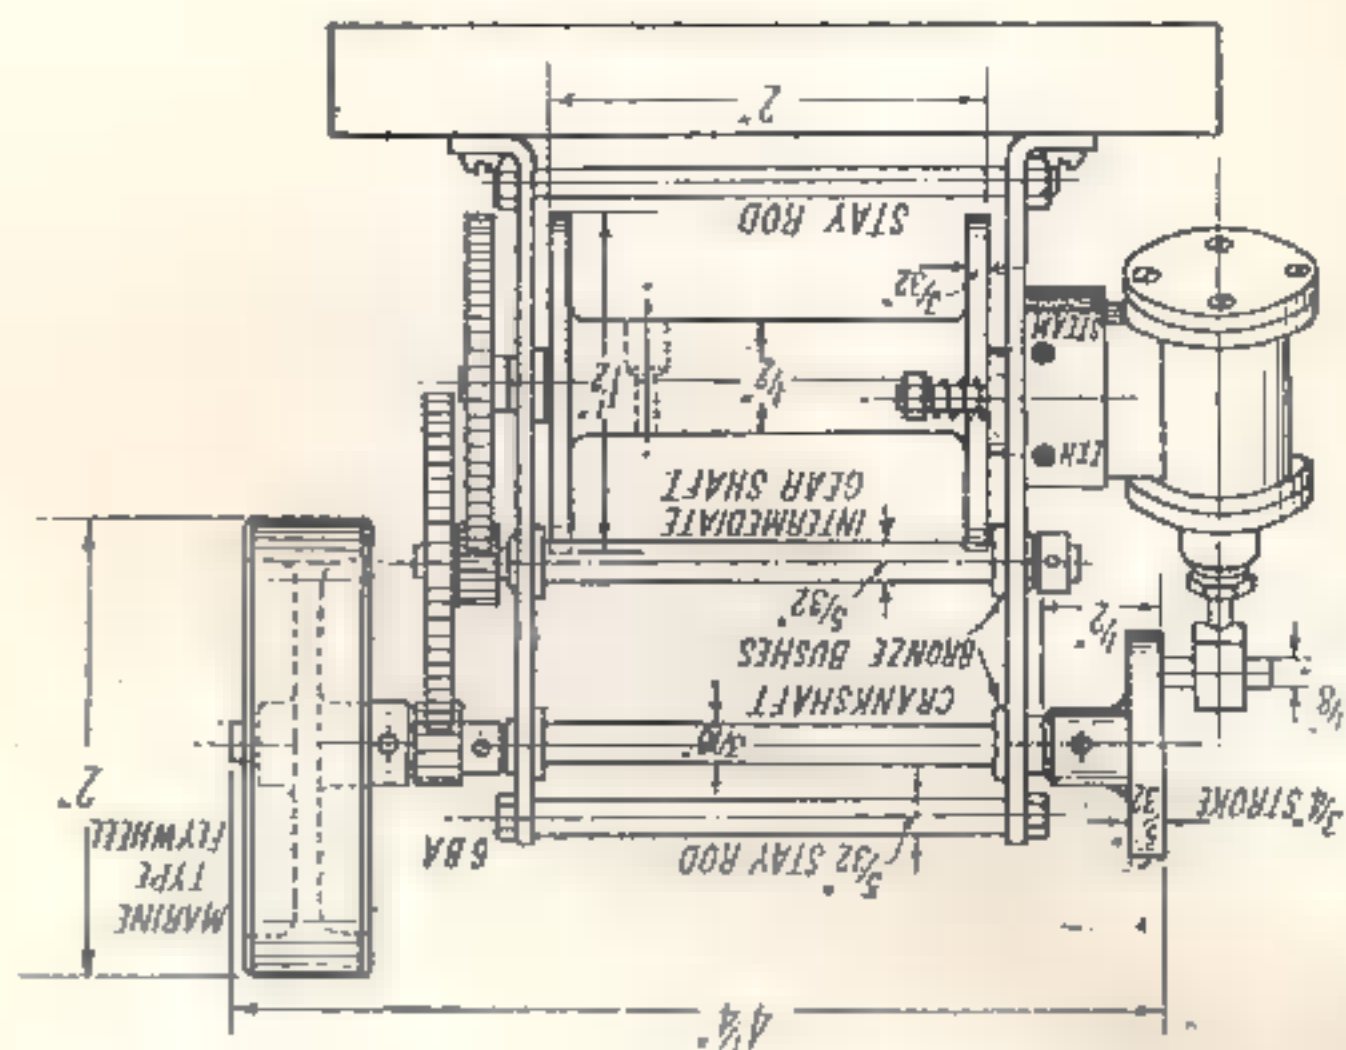

Back view of winch

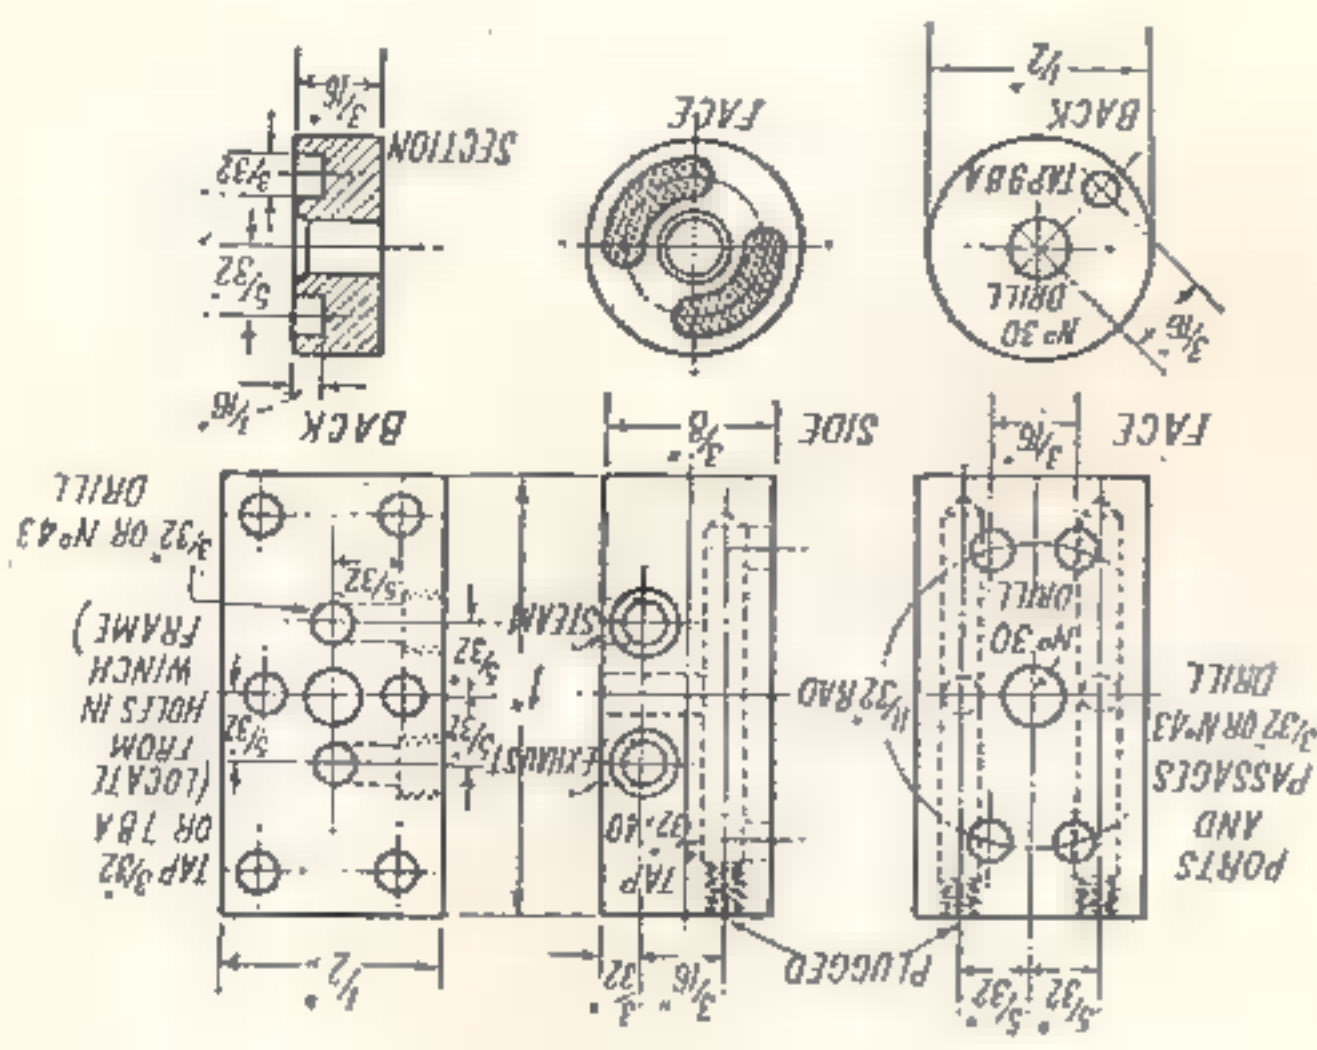

Port block and reversing plate

on, except a few inches below the pulley, shut off steam, and thread a lead or brass weight on the rope as shown, tying a wire hook just below it. The weight is to keep the rope taut, when lowering with nothing on the hook. The crane is then O.K. for service.

The lucky kiddy will be able to hoist quite a decent load off the floor, slew the crane around, and lower the load on to the table or window-sill. A load can be picked up from the garden, and decanted inside the room. Young Curly's home-made steam crane was a source of delight to my few small cronies; on one occasion, we nearly sent the poor old cat into hysterics, by dumping her quads into mother's shopping-basket, and hoisting the lot up to the first-floor window!

I hope that the little crane described above, will give the kiddies many hours of pleasure. All the maintenance it needs, is to keep the bearings oiled, the lubricator supplied, and a drop more water in the boiler whenever the lamp goes out. Extra blobs and gadgets may, of course, be fitted. A locomotive whistle would be useful for the driver to signal to his—or her—mate below, and a clackbox and pump could be fitted, to feed the boiler with water under steam. Other refinements could include a steam gauge, and a water-gauge. Anyway, there is the nucleus; do what you jolly well like with it, as long as it pleases the weans and makes them happy!

How to Operate the Crane

Fill the boiler through the safety-valve bush, until water runs out of the test cock; then shut the cock, and replace the safety-valve. Fill the lamp about three-parts full of methylated spirit, using asbestos string or block for wicks, and leaving them loose. While the kettle is boiling, oil all the bearings—don't forget the jib pulley—and fill the lubricator with cylinder oil, super-heater grade, the stuff that looks, but doesn't taste like molasses. For the hoisting rope, use about a couple of yards of stout fishing line; poke one end through the hole in the winch drum, tie a knot in it, and pull the knot back into the enlarged part of the hole, so that it is below the surface of the winch barrel, and won't interfere with the rope coiling up evenly.


When steam is up, put the reverse lever in the upper position, and open the throttle a little; if the crank stops on dead centre, give the flywheel a flick, to teach it good manners. Hold the rope in your fingers, letting it run over the jib pulley, whilst the engine winds the rope on to the drum. When it is all wound

Jib


The jib is a piece of H or channel-section brass or steel, about 12 in. long; for sake of appearance, it could be filed taper. It is held at the bottom by two pieces of angle, bent up from 16-gauge steel, as shown in the illustration; these are screwed to the baseboard, and a 1/8-in. pin or bolt put through the lot. The upper end carries a round-grooved pulley, 1/2 in. diameter, on a 3/4-in. spindle. Leave the spindle projecting at each side, and attach either pieces of flexible wire, as used for picture-hanging, or small

The union nut and cone of the superheater, are connected to the union nipple at the blank end of the throttle-valve. A short bit of 5/32-in. pipe with a union nut and cone, is screwed into the lower hole in the port block, and connected to the union nipple directly under the lubricator. The two pipes should hold the valve in place, without any other support being needed.

The exhaust pipe is 5/32 in. diameter, and arranged as shown in the side view of the crane. The pipe should be softened, and the upper end hammered into a cone; run a 3/32-in. drill into the end, in case it has been closed up too much. Bend the pipe as shown, and push the upper end into a 5/32-in. hole drilled at the bottom of the chimney. The lower end is connected, either by a union or a running-nut, to a short bit of pipe screwed into the upper hole in the port block.

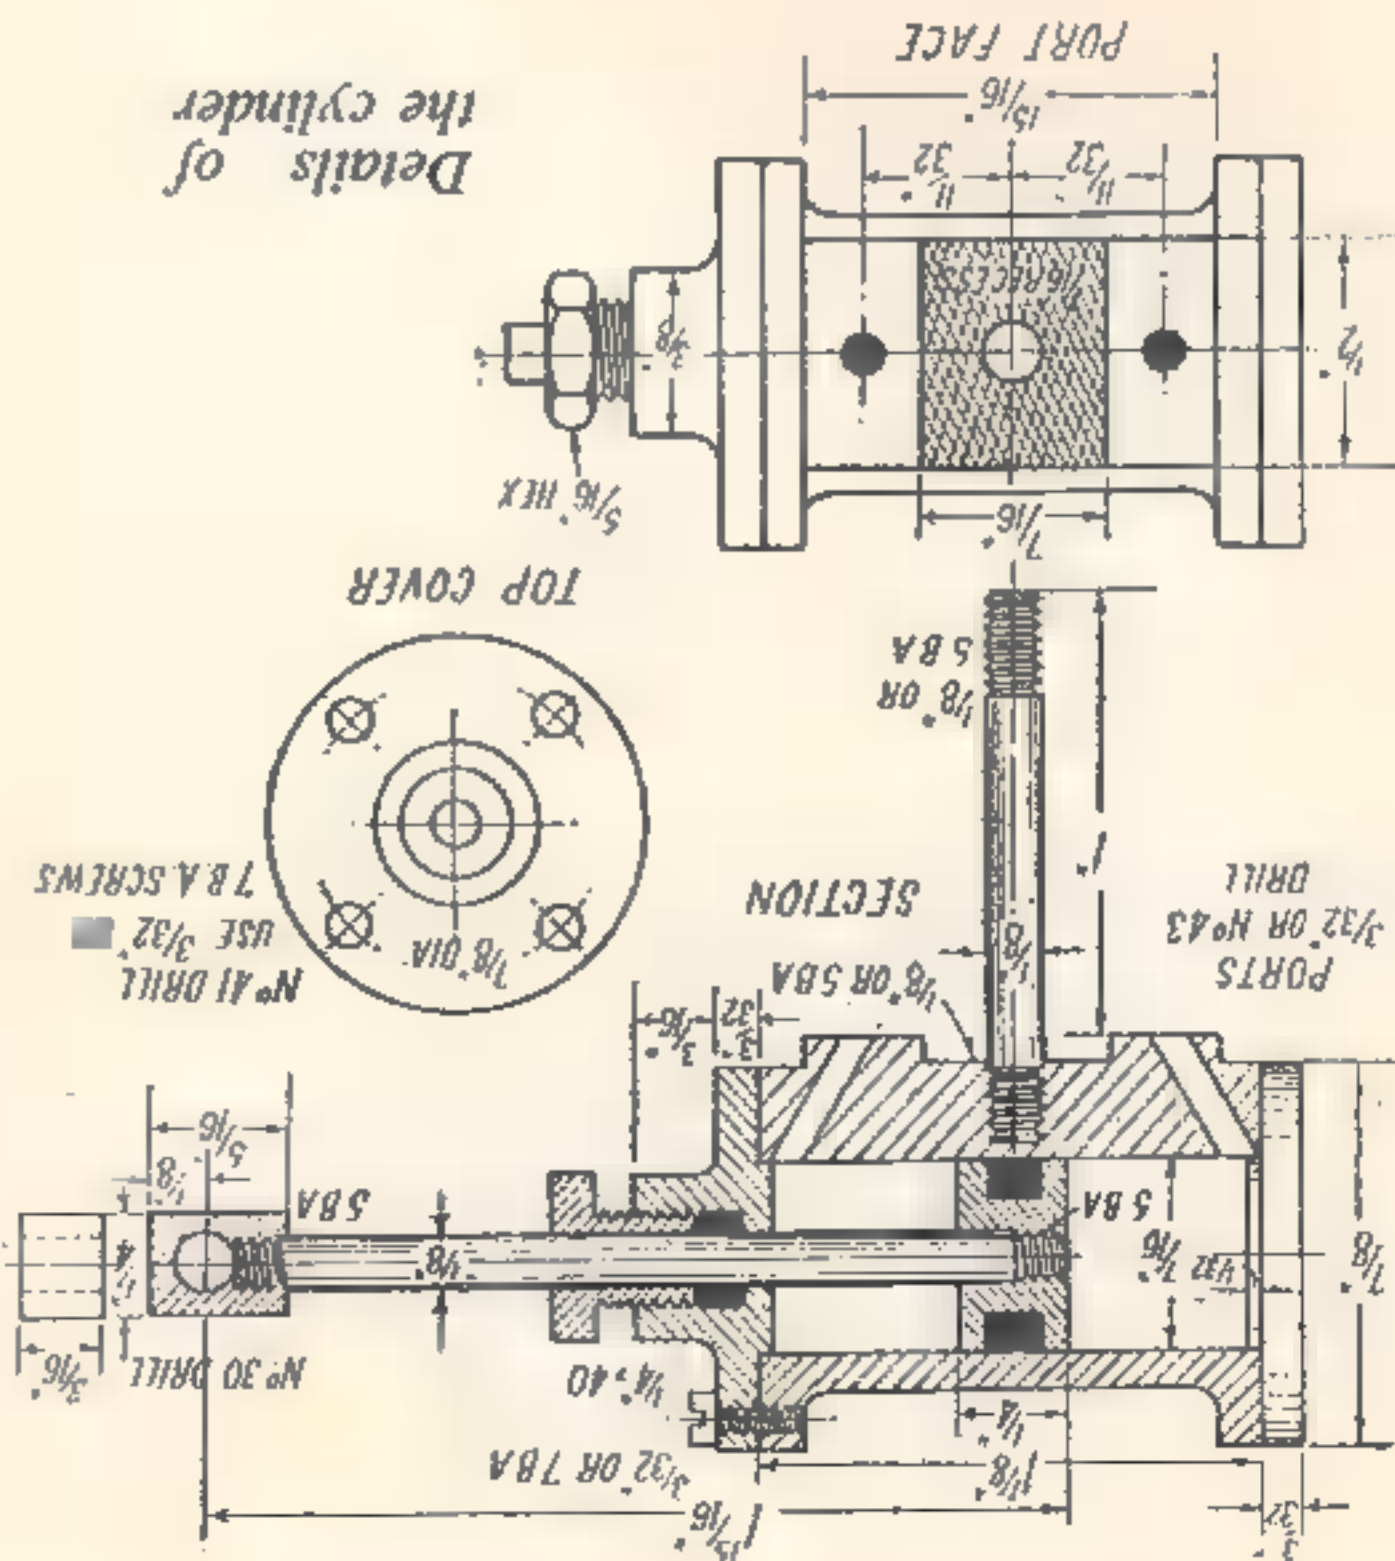

Details of the cylinder

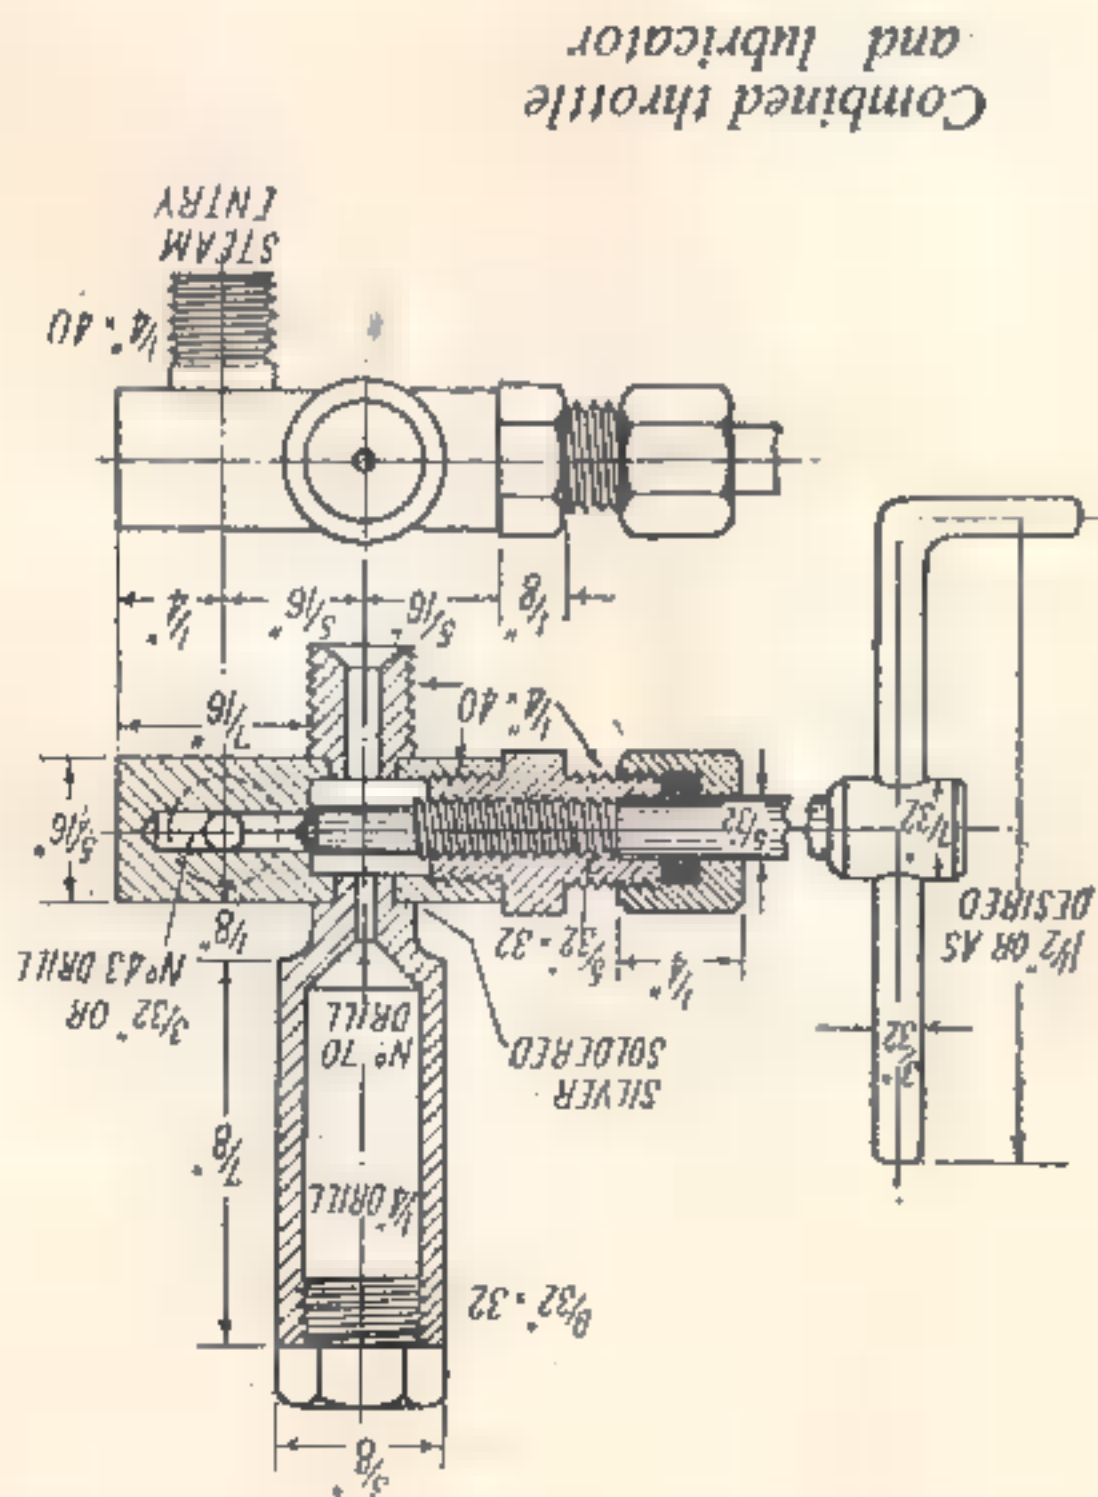

Combined throttle and lubricator

The story of a

SEMI-PORTABLE WORKSHOP

By "Molmutius"



The machine-stand erected, ready for use

My first lathe was built thirty years ago from the design in the late Henry Greenly's book *Model Engineering*. I was 13 then, and made the patterns during my school holidays under expert guidance. The small, but obliging firm who produced the castings allowed me to "machine" them in their shop. The "machine" was a drill and, I am afraid, the alignment of bed and mandrels was a little out. With the aid of hacksaw and file, however, I did produce a lathe. The stand was to my own design, and with civil engineering already dormant in my blood, was of two-inch square deal with tensile bracing


of quarter-inch diameter mild-steel. The flywheel, of overlapping wooden segments screwed together and weighted with huge "cast in situ" lead slugs, is still commemorated in burnt floor boards in what is now the office of a nationalised industry. For five years my turning was lubricated with mingled pride, self criticism and honest sweat. Then for about £13 or £14 (Oh happy days!) I bought a four-inch round-bed Drummond lathe and a 2-h.p. motor. As a countershaft was necessary, I further 8s. produced two fine cast-iron hangers with split brasses. The scrap yard provided one-inch shafting and, miraculously, a matching cone pulley.

A large Rawlplugchisel soon put two sets of holes through the kitchen wall. Unfortunately it also put a brick through the family, of course, were out, and my civil engineering studies, then commencing, led me rapidly to aluminum cement. Two orange-box ends shattered and hid the ravages on the working face, and moving bookcase about a couple of feet in the adjoining corridor hid the far side.

The machine-stand erected, ready for use


A civil engineer, bent upon, but never succeeding in making his fortune, is inclined to be peripatetic, and although the hangers were eventually sold at a profit—and replaced by a heavy timber frame taken to pieces and reassembled for each new resting place, the set-up was unwieldy, and when space requirements forced my workshop upstairs, rather punishing to normal house construction. When, then, in 1946 I returned from the R.A.F. to find growing children requiring a garden swing, the heavy timbers were surrendered and a new design evolved. I had, for some time, been aware of the merits of bedstead angle-iron, having used it extensively for cleats. It is of very varied texture, from soft as butter, to next-door to impossible to hacksaw or drill, but it is cheap, very cheap, and it is readily available and light. The drawing shows the design; the longer members of the frame are spliced, bedsteads being of limited length. All joints are made with two 1/8 in. round-head Whit screws and nuts, so that the whole comes to pieces easily and quickly. I am toying with the idea of welding each side frame into an integral unit, without any screws, but as the shelf underneath was an after-thought, easily added with the present type of construction, I am holding off until I am sure that the design is perfect. Does a model engineer ever reach that most unsatisfactory state of mind? Bedstead angles, by the way, vary quite a bit in cross-section. I am not sure if there is a British Standard! The heavier sections were, therefore, selected for the main frame and horizontal members, and the lighter ones were used for the side frame and cross bracing. The counter-shaft bearings which followed the split brasses were a pair of abandoned car ball-races, bushed to one inch diameter and mounted in beech blocks, split on the centre-line and housed to take them. A tinplate cover kept dust out. These have now been most satisfactorily replaced by a pair of cheap and neat modern die castings with impregnated bushes. There is a modern tendency to hinge the table on which motors are mounted, but although this was tried as an experiment, I have not found my motor heavy enough to ensure a positive drive against heavy cuts, and as the rigid attachment shown works excellently, the complication has been avoided. A high-speed drill for small sizes is almost essential on model work and so is some method of tool sharpening. Electric motors are ex-

PLAN

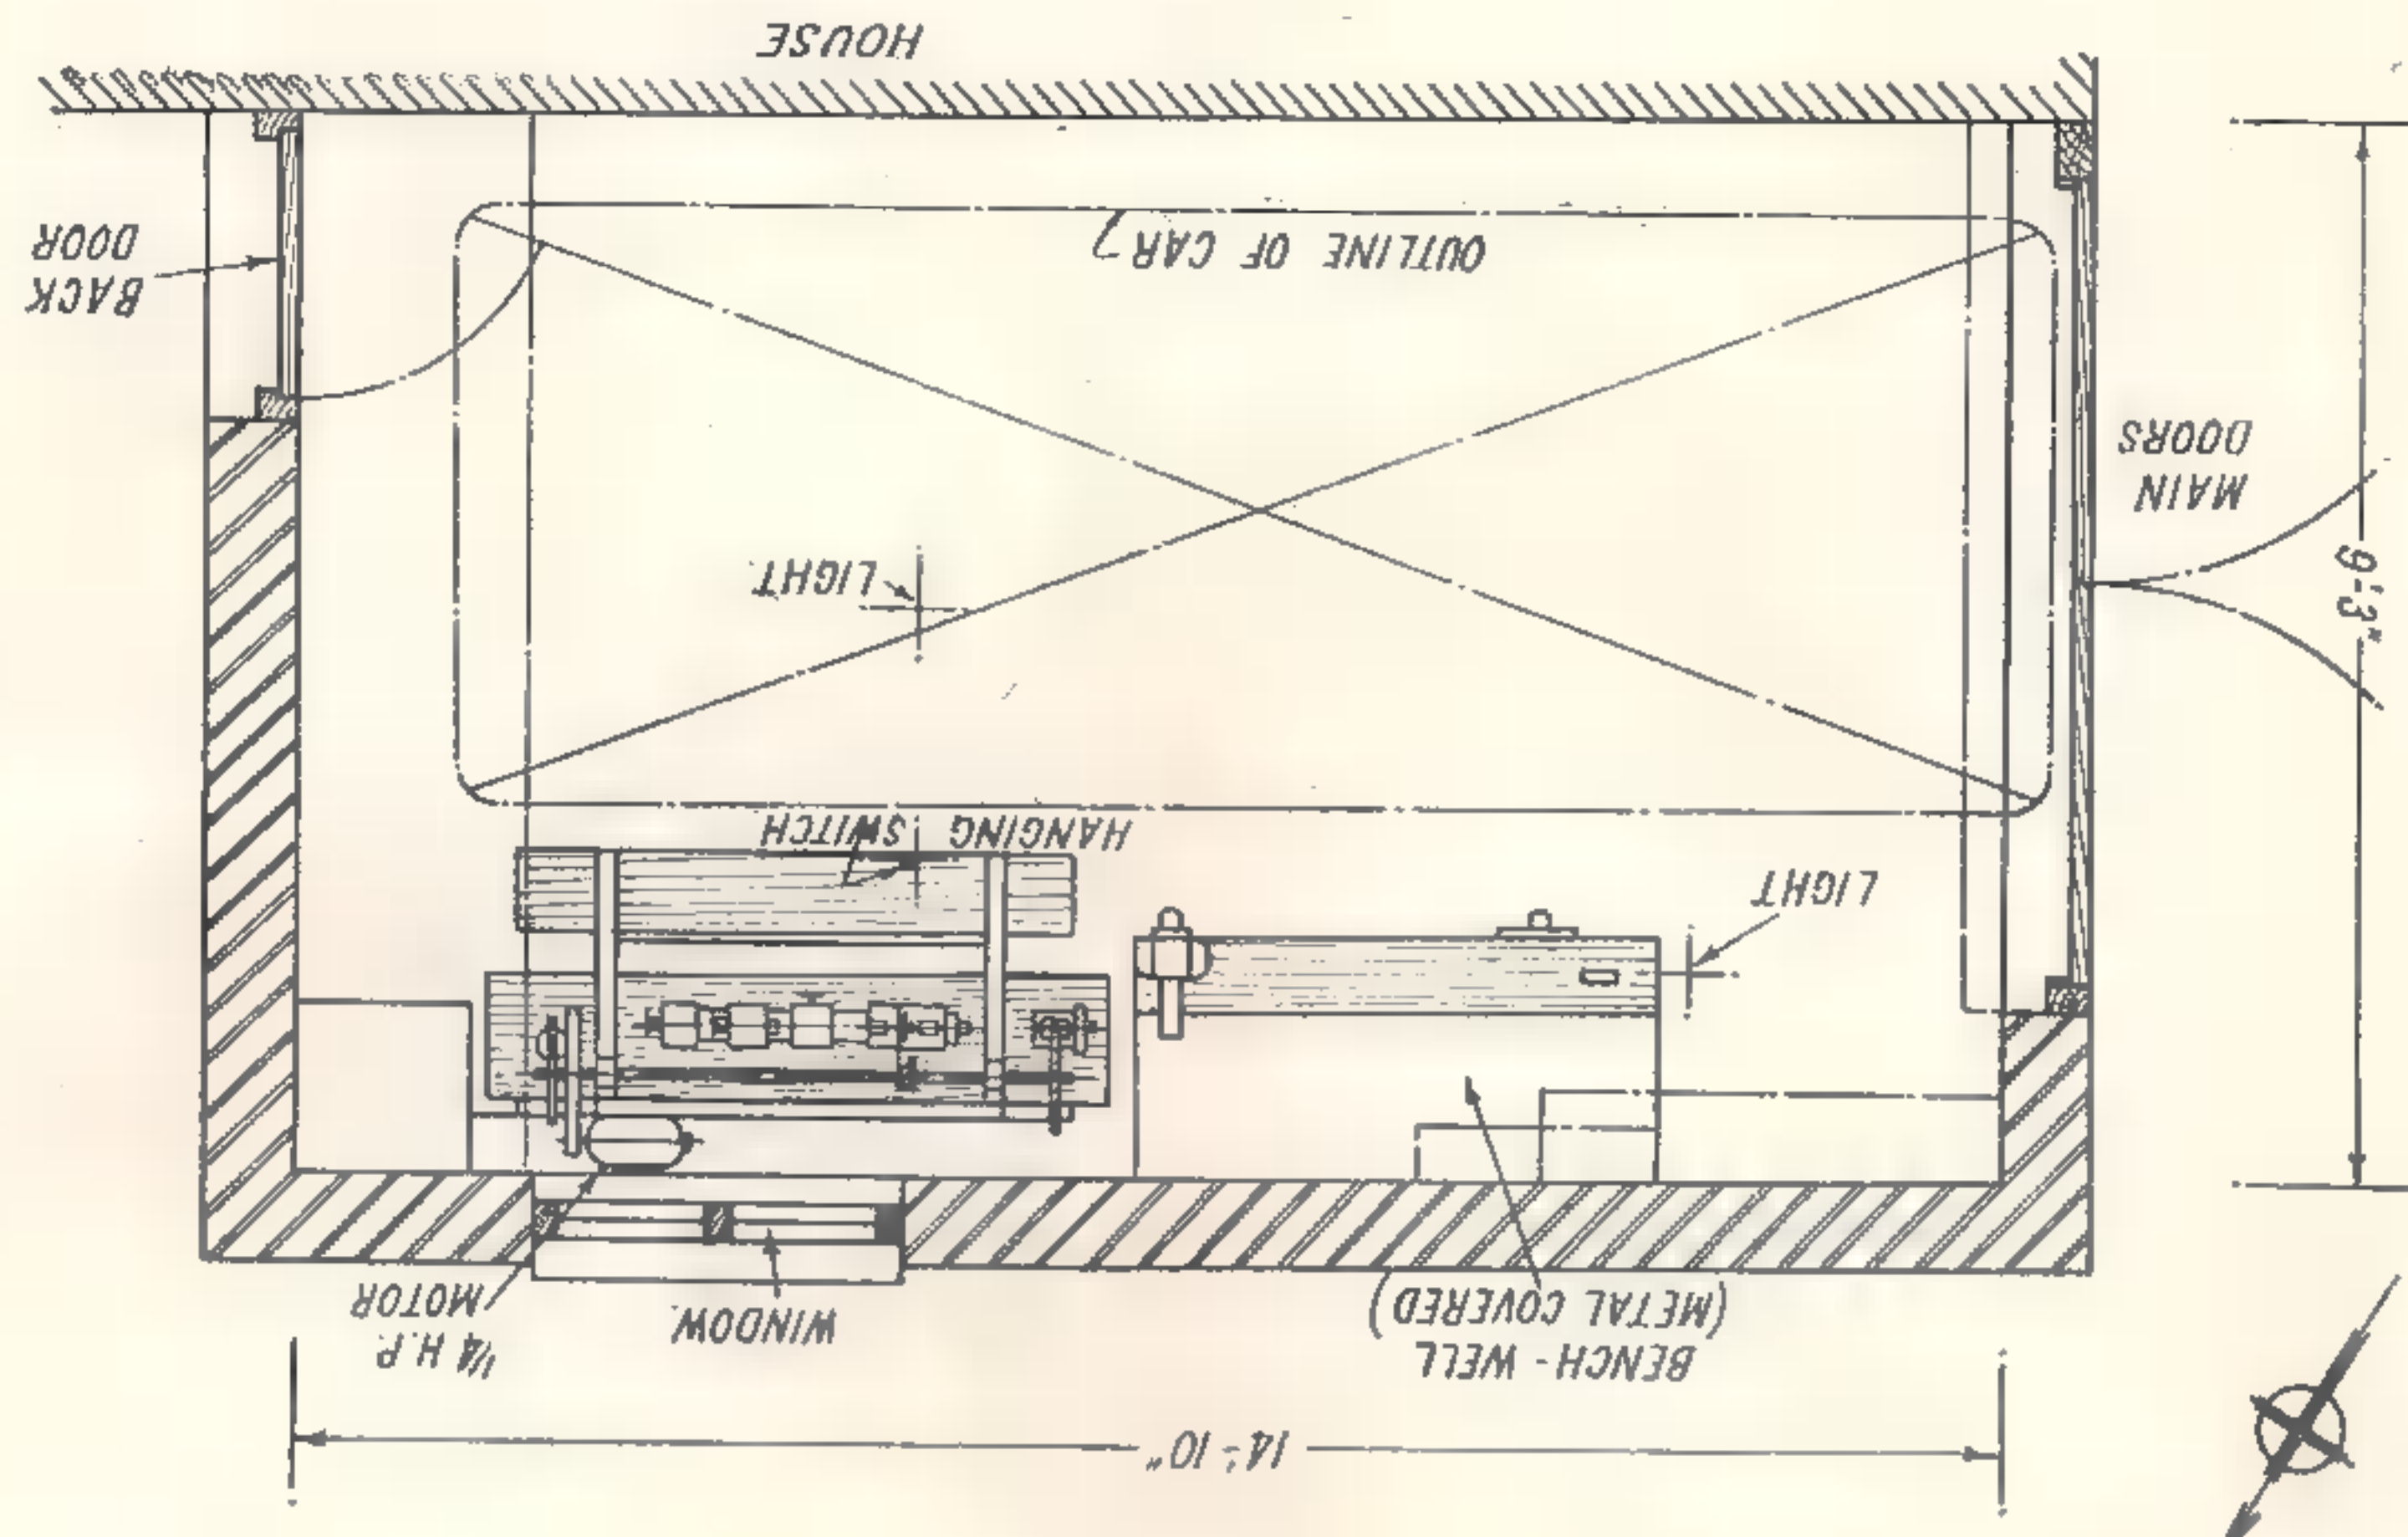

INSIDE ELEVATION


1/4" = 1'-0"

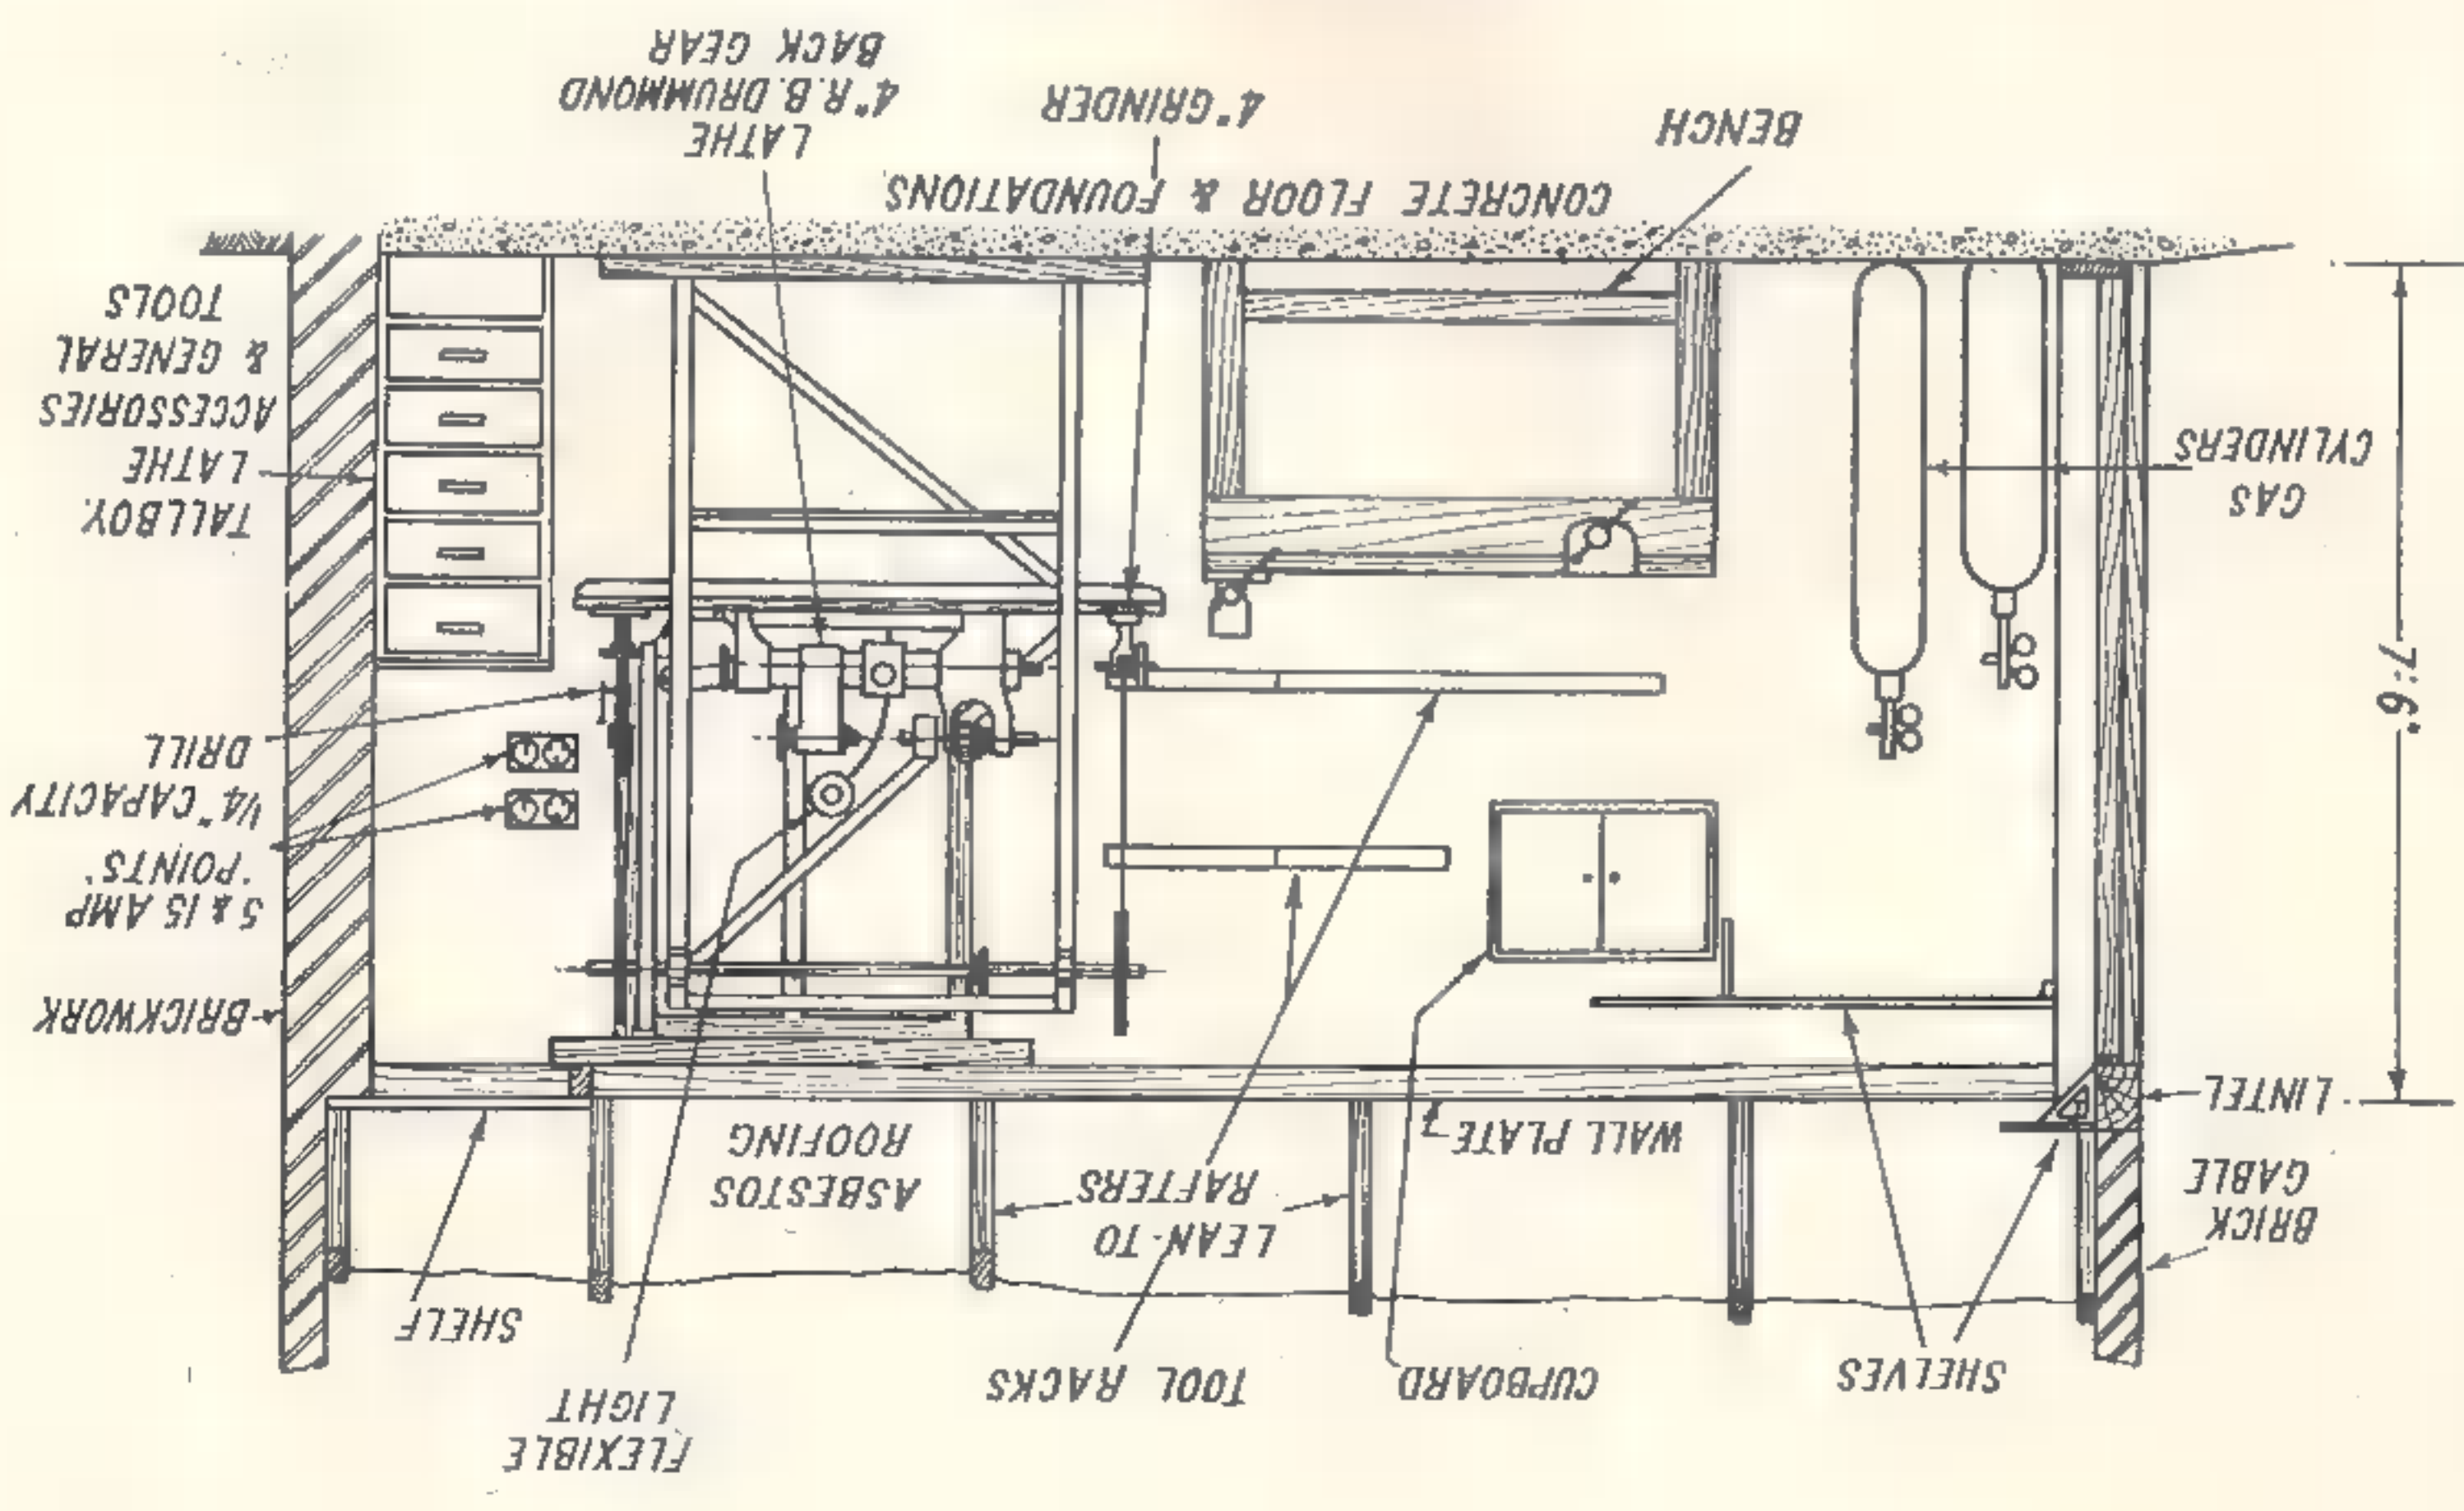



drive from a 1-in. flat leather belt to a patent continuously-jointed vee-type, but this has given no trouble at all, and although it takes a minute or two to break, when this is necessary, it is absolutely silent. A pair of home-made lubricators have been fitted, with good results to the headstock bearings, and all other oil holes have been covered with cycle type oil cups to keep out dust and swarf. In order to preserve the cutting oil which drips from a tap soldered into a cocoa tin mounted on a sort of retort stand screwed to the cross-slide, the bench carries a large tray arranged with ■ fall to one corner. Here the lid of a Virol jar has been soldered to the underside and a hole cut through both tray and lid. The Virol bottle itself screws up through a hole in the timber to catch the precious oil. A circle of fine copper gauze acts as a filter, and a gallon of Hough-tolard has lasted me for years. Round-bed Drummonds are still to be had in good condition at reasonable prices. Small drilling machines and grinding heads can be home-made. The rest is easy. Why be without a workshop?

Left: Plan of table and shelf (machines removed)
Below: Elevations of machine stand

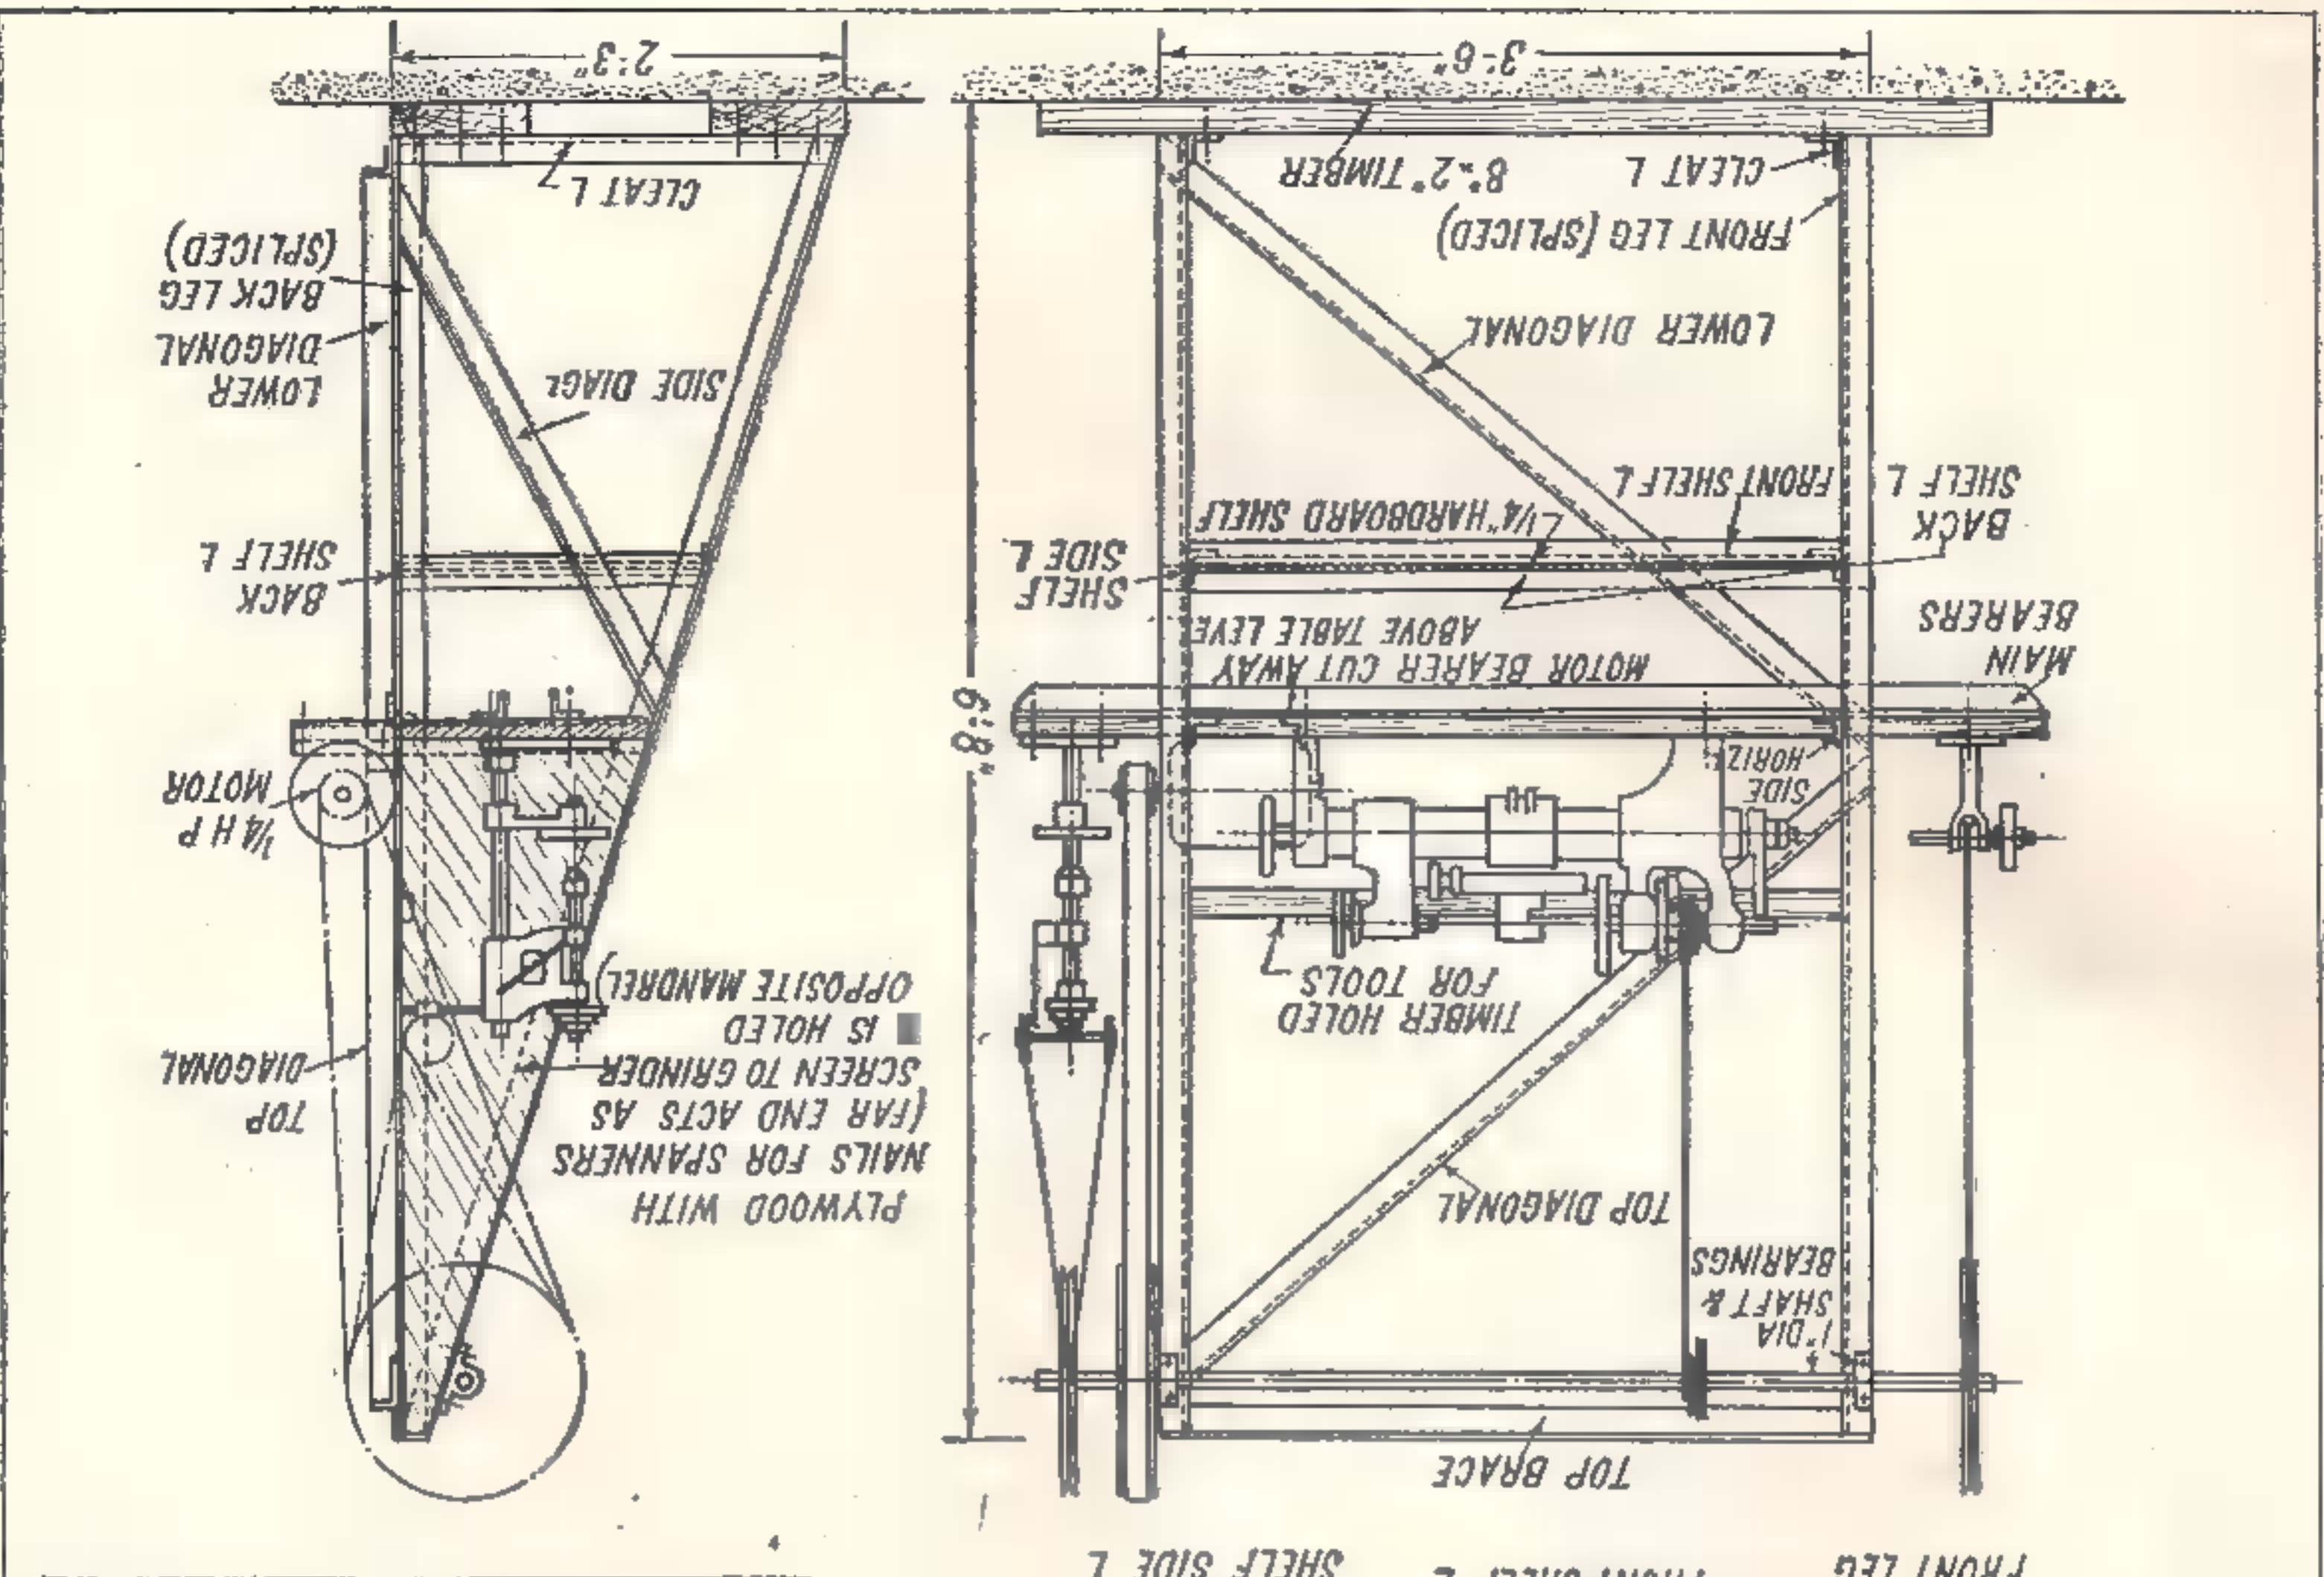

which hang spanners, driving dogs, etc. A little war-time "foot" in the form of a flexible-stem lamp fits behind the lathe, and is absolutely invaluable. It is long enough to reach the drill if required. Along the back of the frame is a timber, holed on the top to carry centres, chuck arbors, etc. The whole set-up is mounted on two 8-in. by 2-in. timbers, which although hardly necessary on the concrete floor of the present home-built garage, prove their worth when used to distribute load and vibration through the floor joists of ■ bedroom. I sometimes read the advertise-ments for Boxford, M.L.7, and similar lathes, a little wistfully, but having fitted my old Drummond with a most fascinating compact backgear, I doubt now if I shall ever part with it, no matter how my fortunes may increase! The change has necessitated an alteration in

of the plywood carries screws upon "keyhole" type cover. The inside wood is holed and fitted with a using the hollow mandrel, the reaching the mandrel, but to allow plywood, to prevent emery dust blanked off with another sheet of alongside the grinder has been three 3/4-in. setscrews. The side frame affair of three plywood discs, ■ 1-in. collar, a large washer, and a pair of three plywood discs, ■ but the other is still ■ home-made, these pulleys is another die casting, respective pulleys at will. One of slipping the round belts on to the two items are brought into use by the extended countershaft. These grinding head, at opposite ends of the side frames to carry, on plywood tables, a 3/4-in. Champion drill and lathe bed have been extended through angles forming the support for the result is that the two horizontal leads me naturally to economies. pensive, and a Scottish education

IN THE WORKSHOP BY DUPLEX

A JIG-SAW MACHINE

shallower than is usual in commercial machines, but this capacity will be found sufficient for most work and helps to maintain the rigidity and compactness of the machine. However, the throat depth was, in part, dependent on the size of the materials and castings available at the time; but, if a greater work capacity is required, this could be met by using a deeper frame in the form of a properly proportioned casting in iron or aluminum alloy, and at the same time fitting a slightly smaller crankshaft pulley.

Now that the driving mechanism has been completed, the next step is to make and fit the saw table and the frame supporting the upper end of the saw blade.

The Table Bedplate—Qa

Mild-steel plate, $\frac{1}{2}$ in. in thickness,

is used for making this part, which at its forward end is secured to the motion plate by two $\frac{1}{2}$ in. diameter Allen cap-head screws. When the motion plate is mounted in position and this bedplate secured to it, the bedplate should lie evenly on the boss at the forward end of the motion plate bracket casting and also, at its rear end, on the $\frac{5}{32}$ in. distance collar resting on the flat machined on the other lug of the same casting. With the parts secured in this position, the bracket casting is detached and turned upside-down. This will enable the casting to serve as a guide for drilling and reaming a $\frac{1}{2}$ in. diameter hole through the bedplate to take the frame column.

The Table Supports—Qb

These are made from mild-steel to the dimensions given in the drawing, and each is then secured to the table bedplate with a single, $\frac{1}{2}$ in. diameter Allen cap-screw, inserted from below.


The Saw Table—Qc

Mild-steel plate, $\frac{1}{2}$ in. in thickness, is simply rigid for making the saw table. After the material has been finished smooth and flat on its upper surface, it is secured to the table supports by means of four long bolts with recessed heads. It is important that all four sides and edges of the table should be made true and square, and also that the table itself should be mounted square with the motion plate, for these edges serve as datum surfaces both when sawing and when setting the work fences. The saw frame, having a throat depth of $4\frac{1}{2}$ in., is admittedly

Continued from page 398, October 1, 1953.

Fig. 23.

Qa—the table bedplate; Qb—table supports; Qc—the saw table; Ra—the saw frame column; Rb—the frame arm

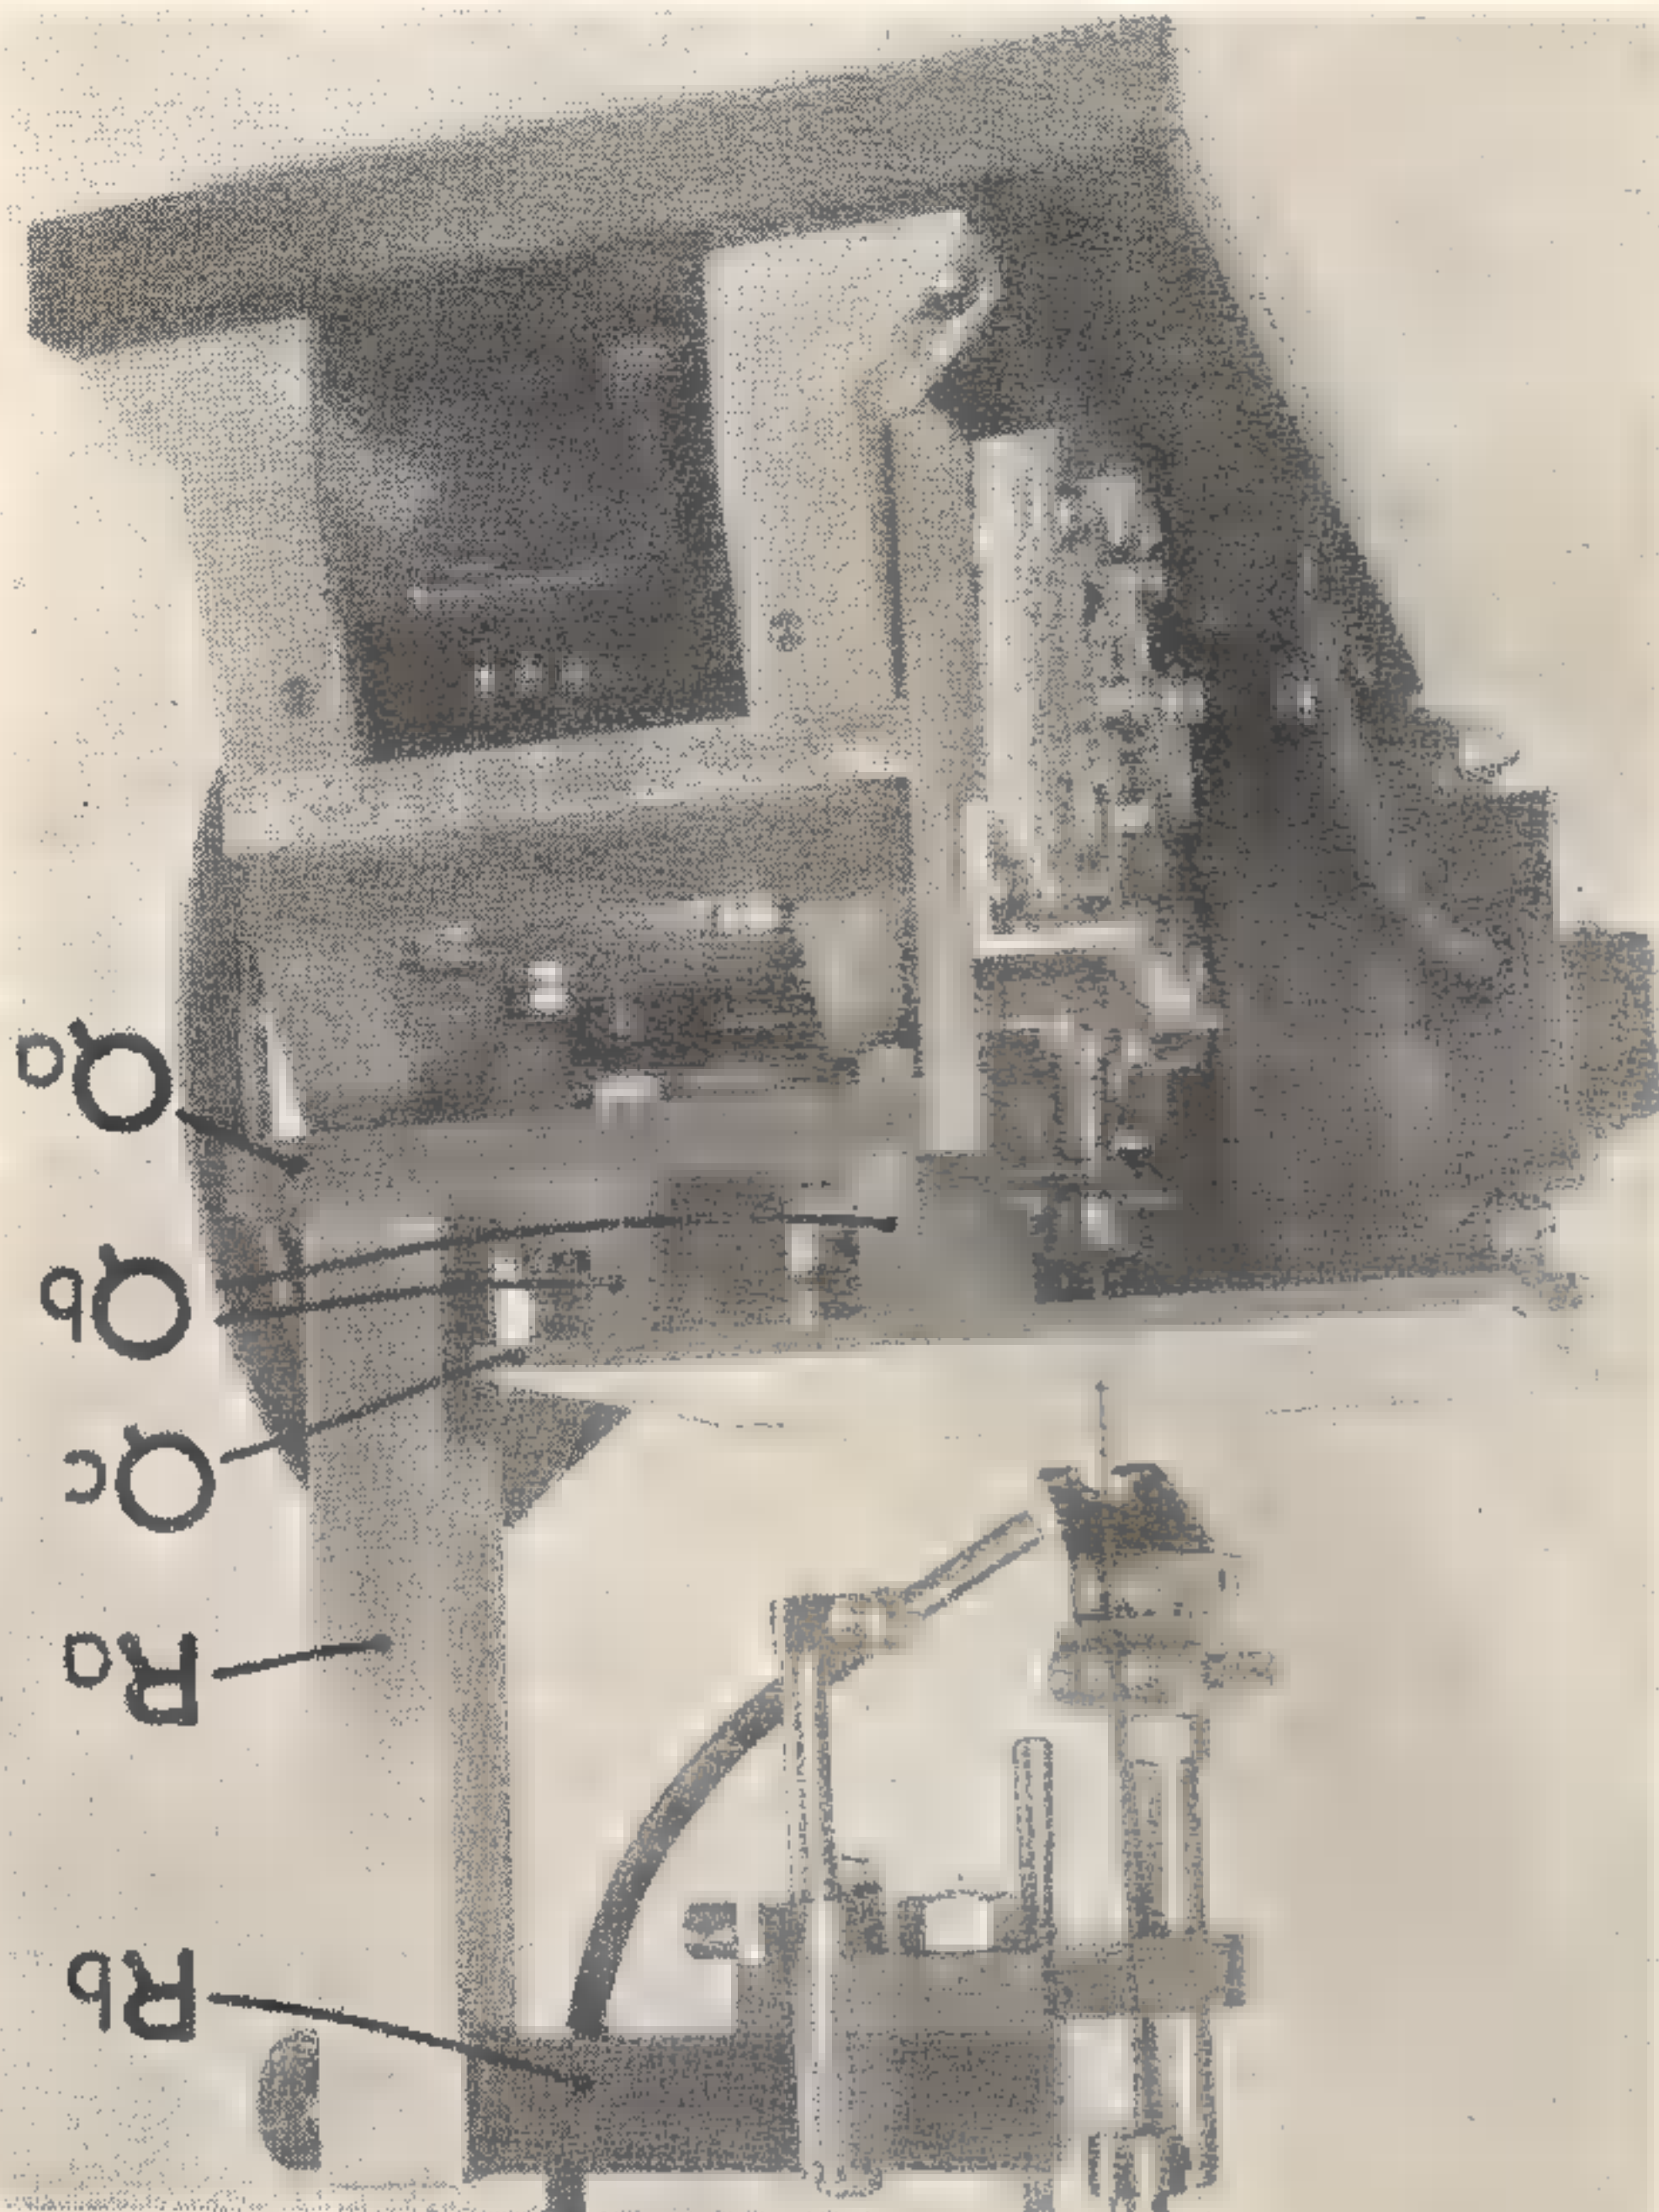

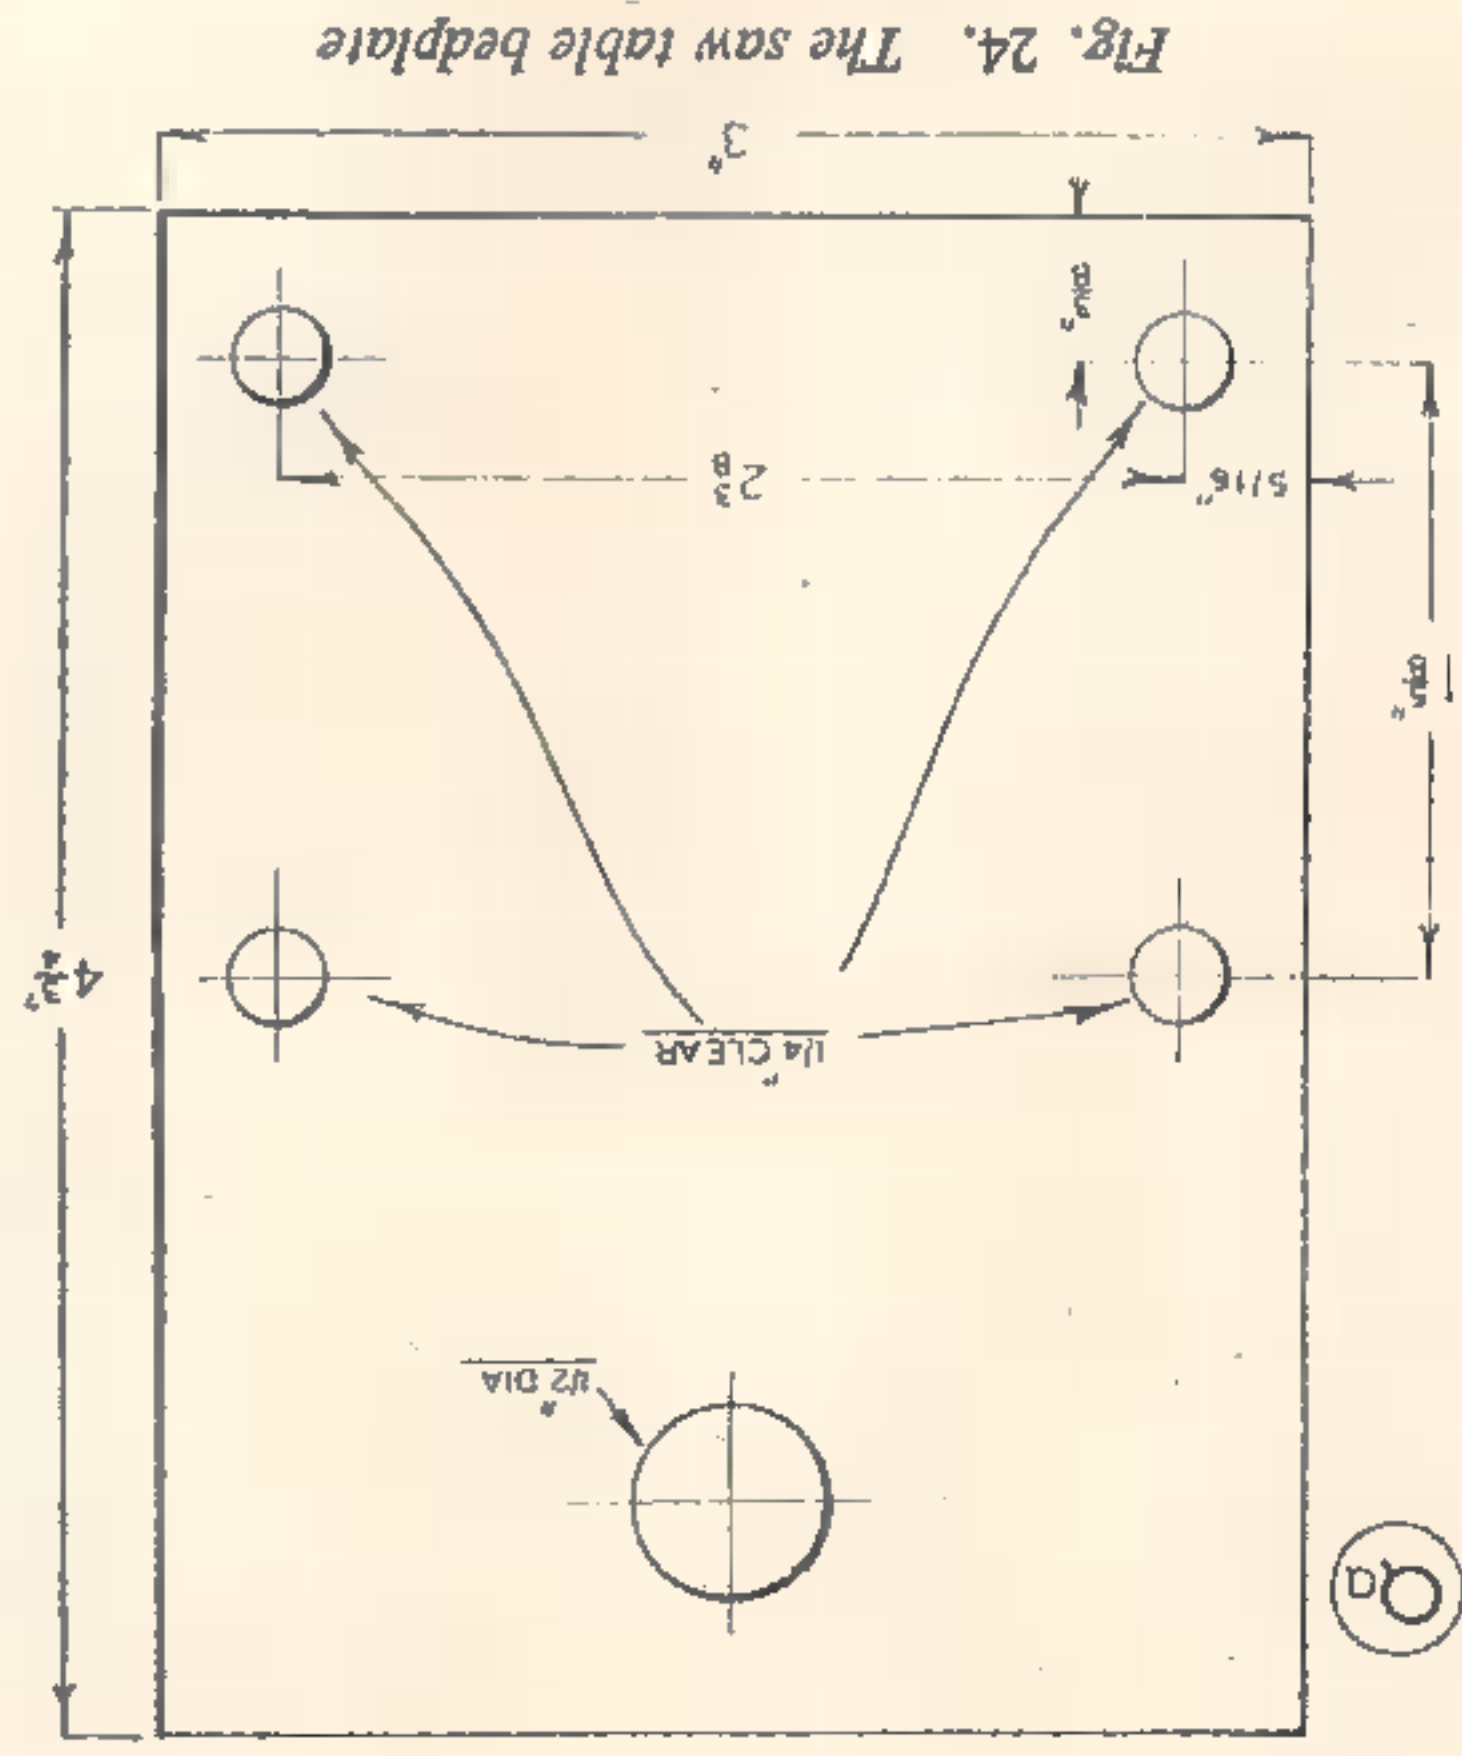


Fig. 24. The saw table bedplate

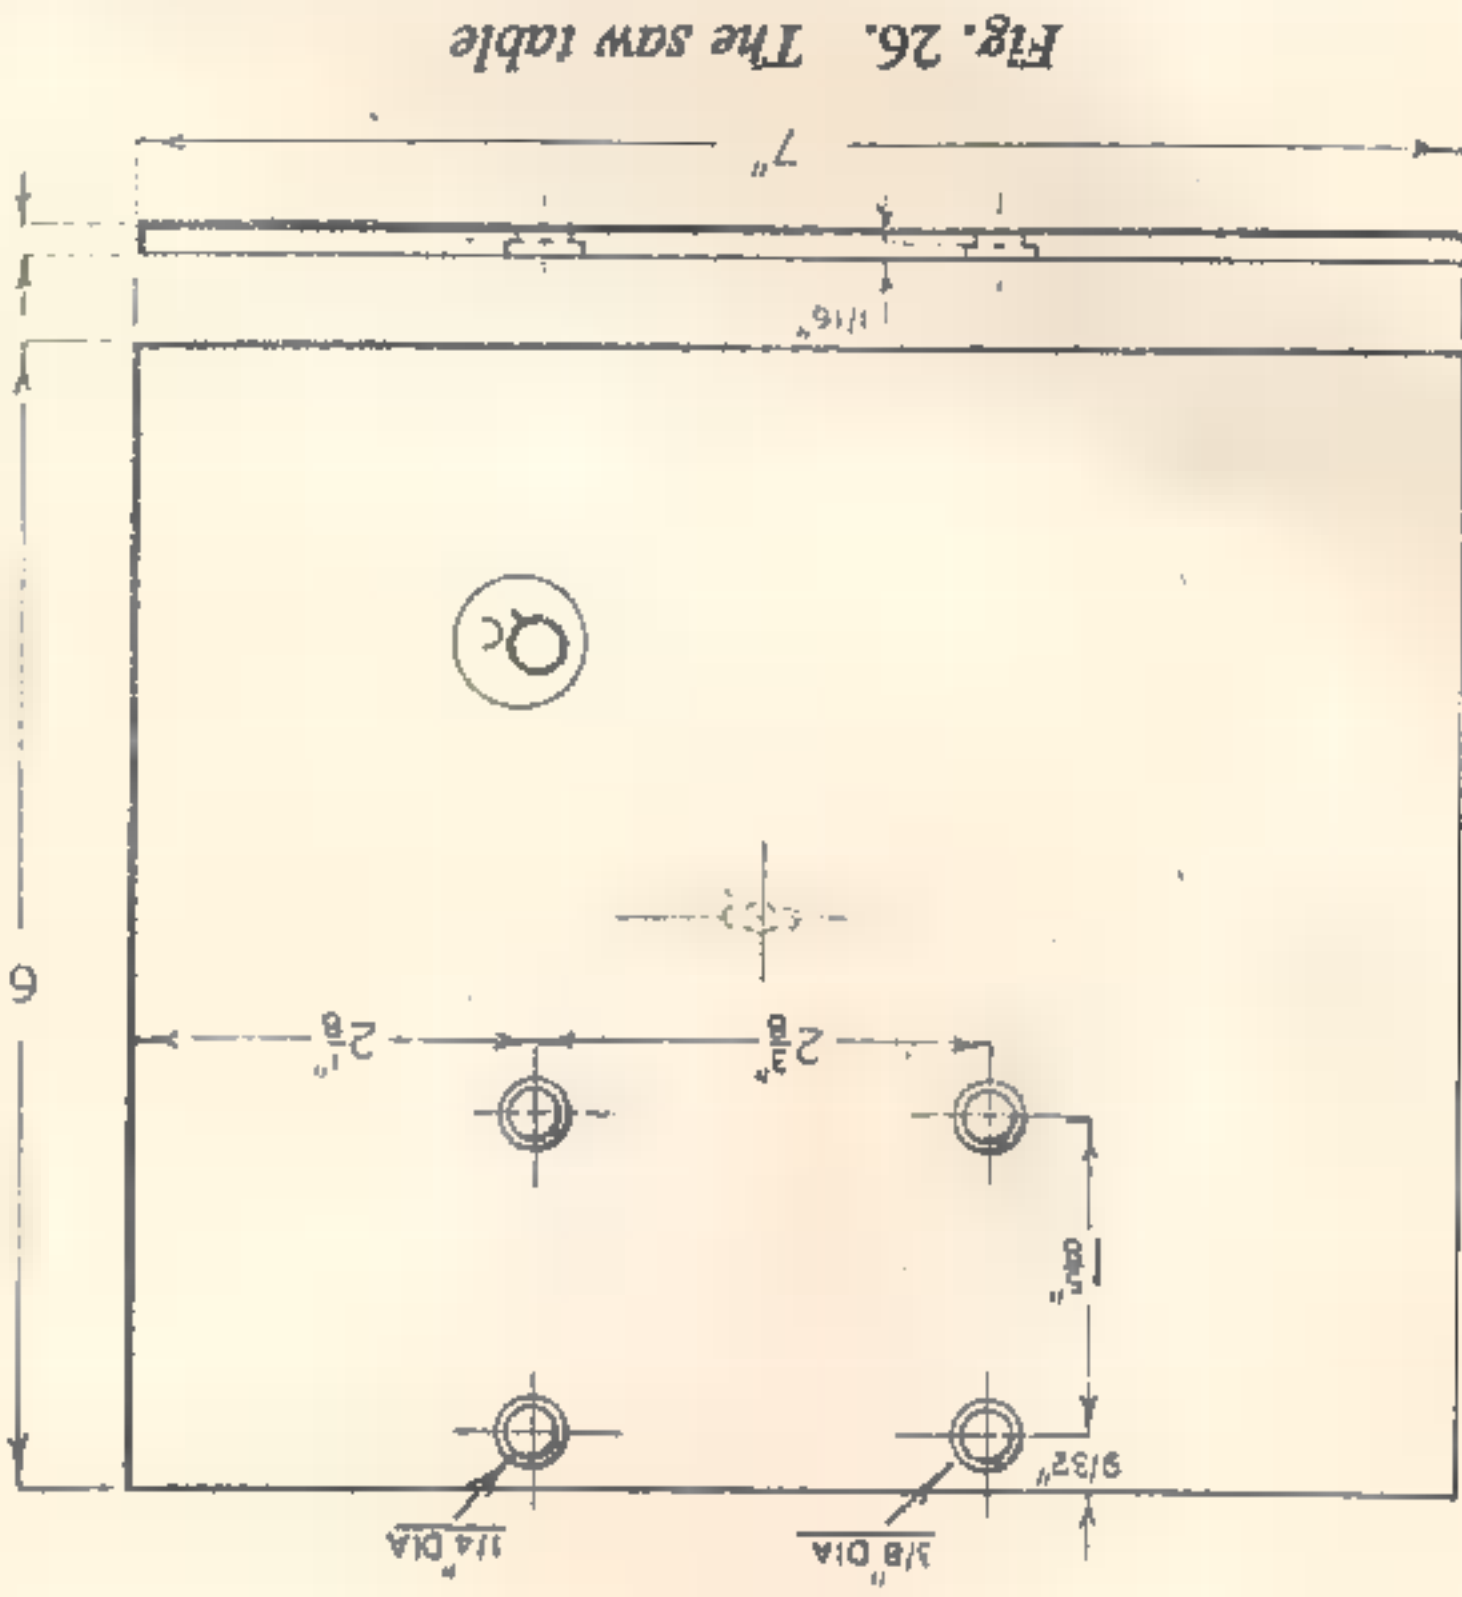


Fig. 26. The saw table

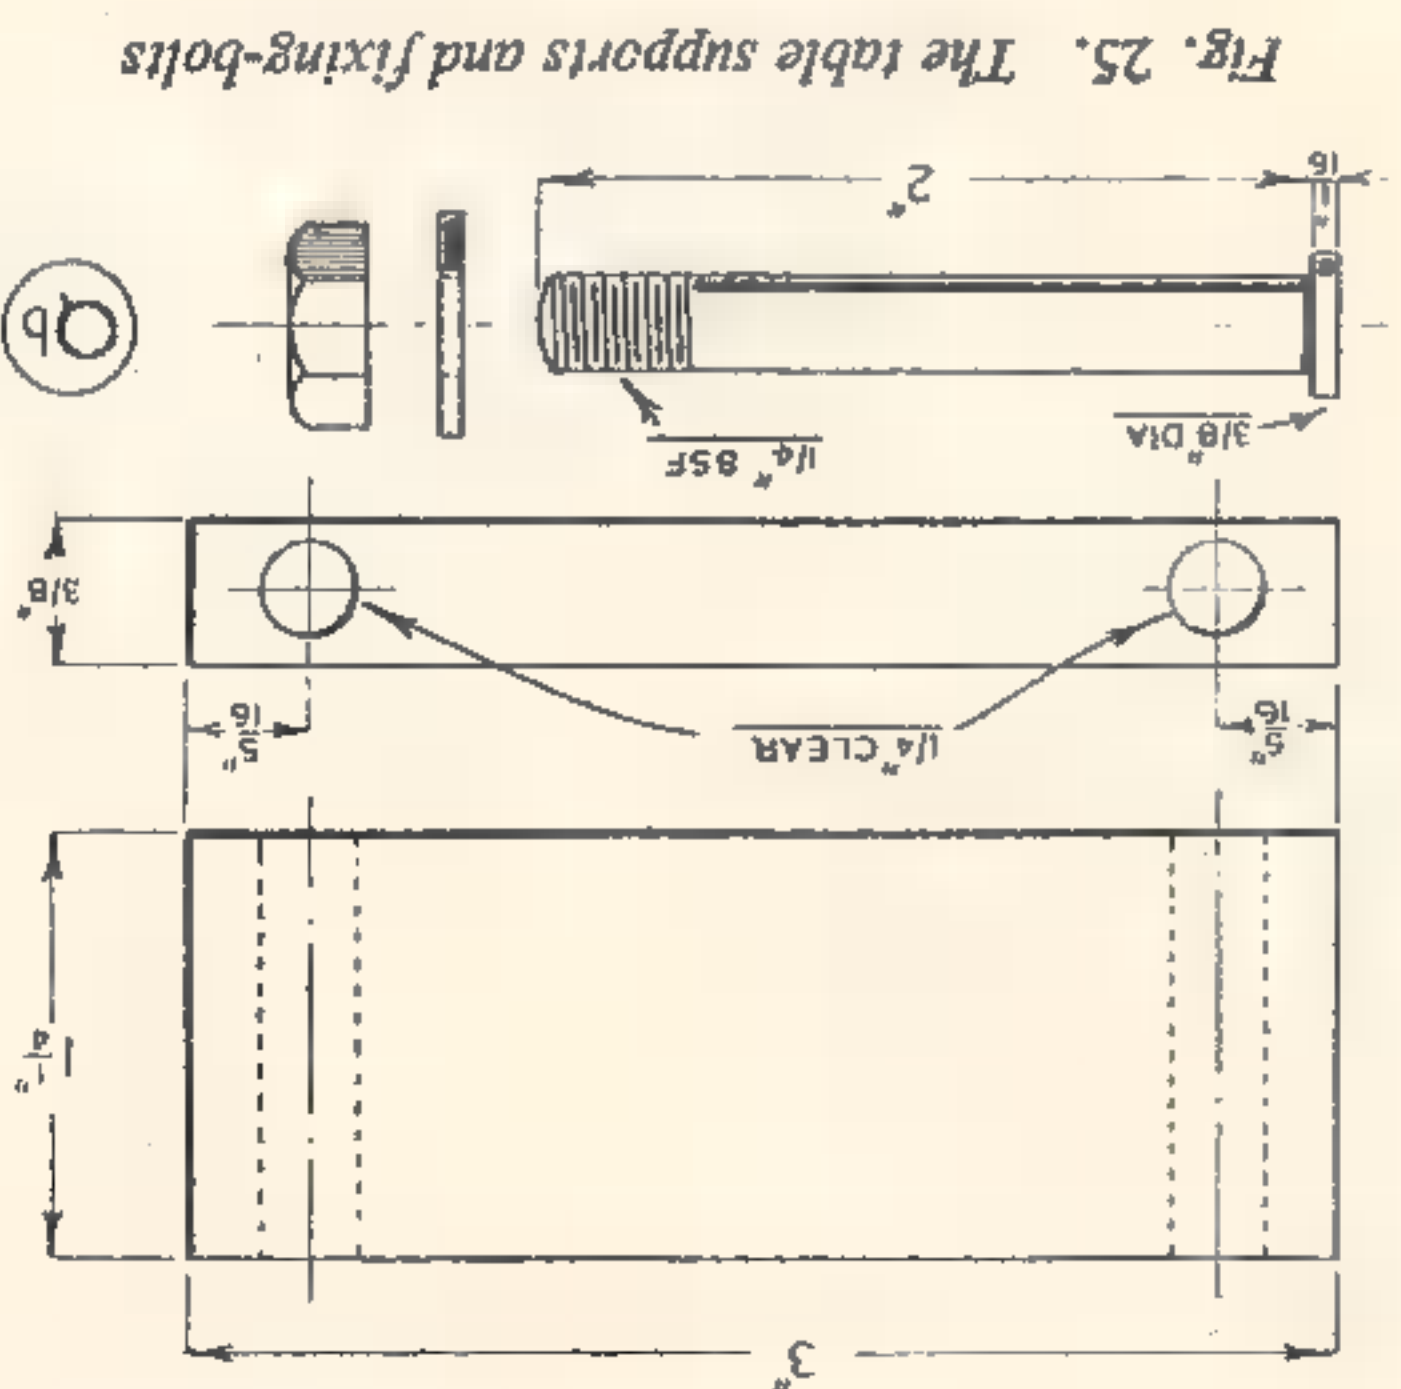


Fig. 25. The table supports and fixing-bolts

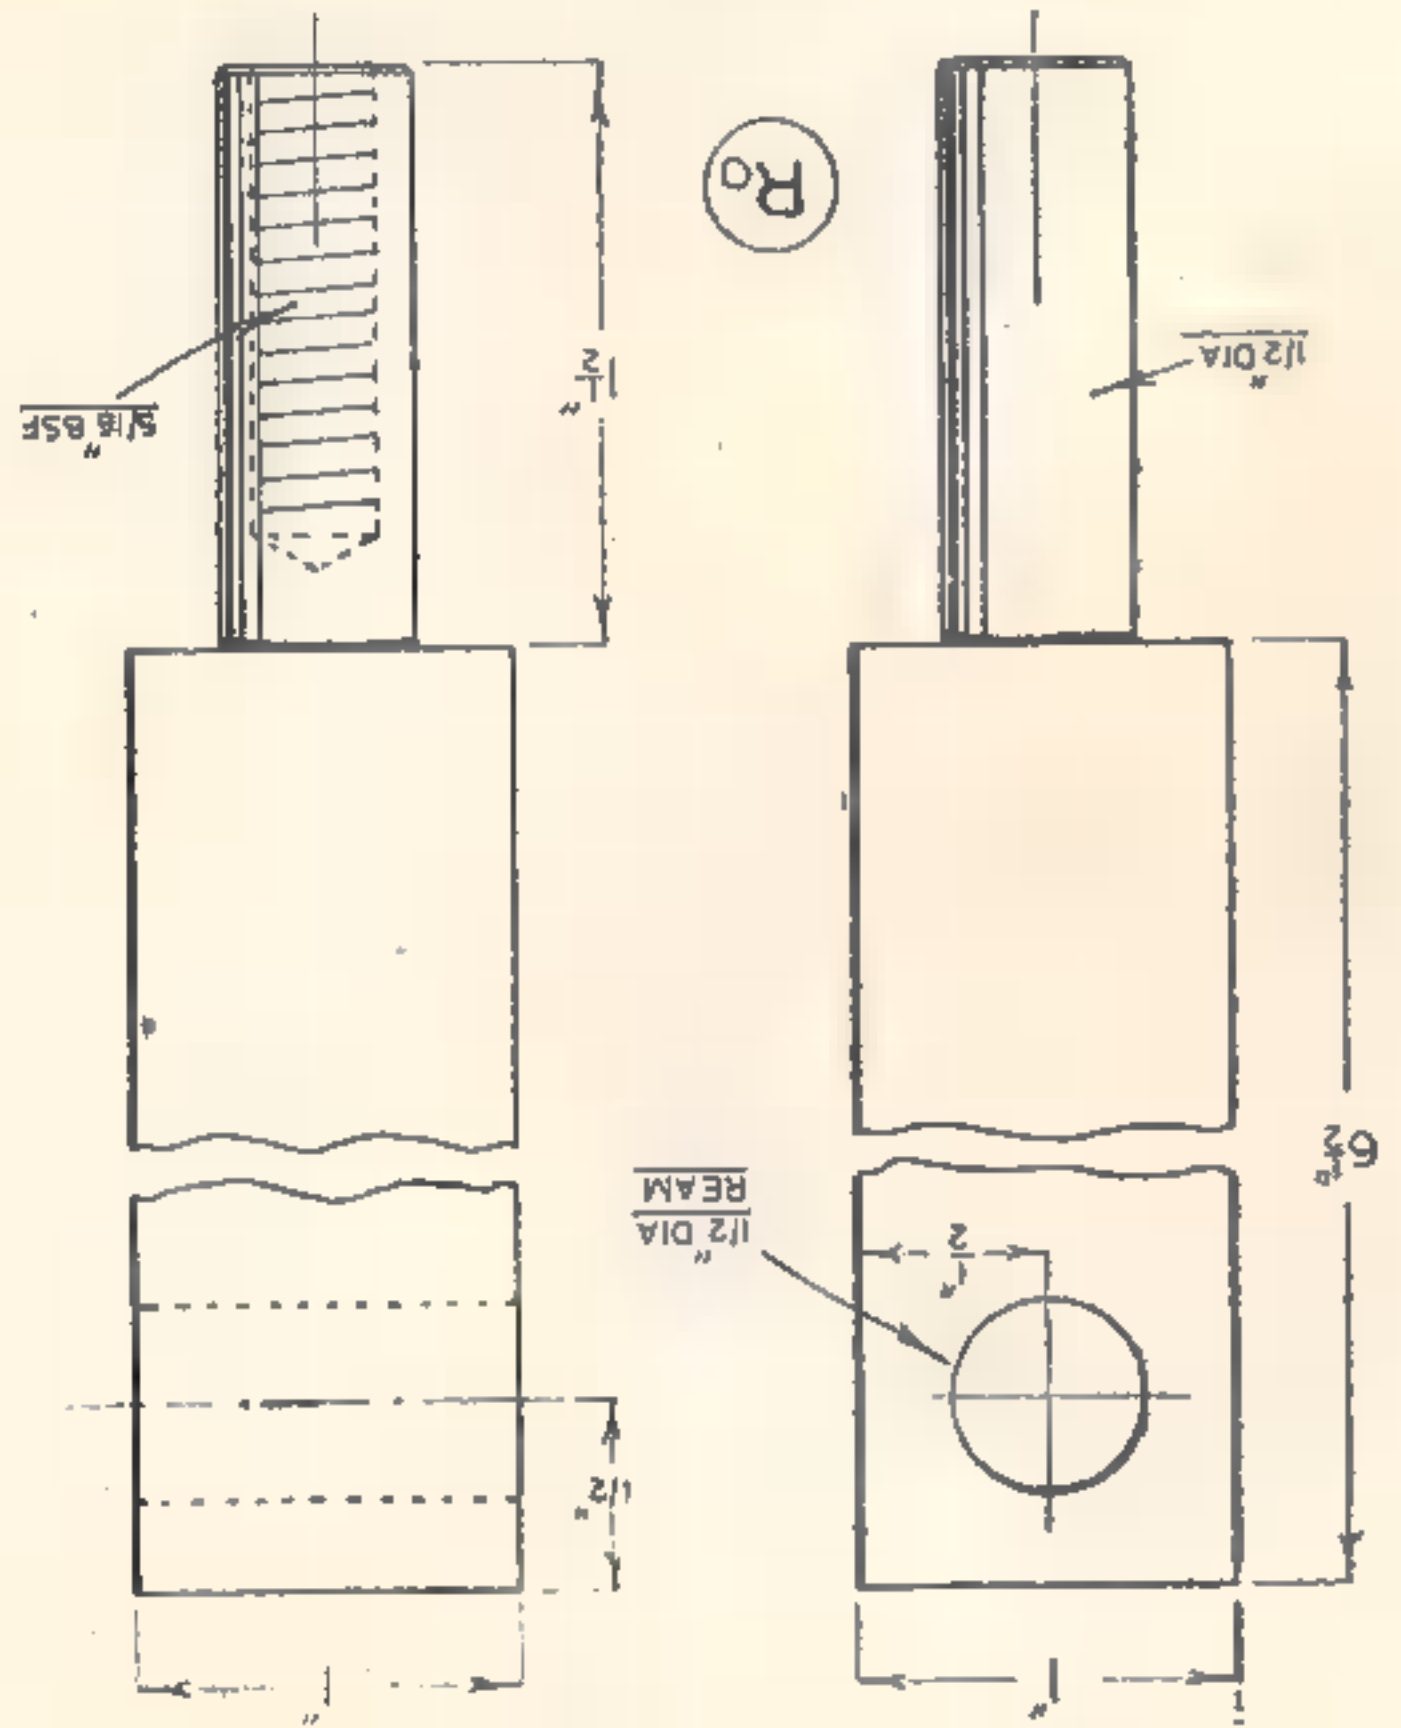


Fig. 28. The saw frame column

The Saw Frame Column—Ra
A length of 1 in. square mild-steel is carefully marked-out and centred at either end for machining drilled at either end in the lathe. The lower end is shouldered down to give a wringing fit in both the table bedplate and the motion plate bracket casting. To drill and tap the lower end of the column for the 1/8 in. diameter Allen fixing screw, the upper end is centred in the four-jaw chuck with the lower end supported by the tailstock centre. The support the work instead of the square mild-steel. Again, the work is centred at either end, and one end is shouldered down to form a wringing fit in the frame column, where it is secured in place with a nut and washer. As shown in the drawing, this part is cross-drilled at two points to carry additional fittings.

The Frame Arm—Rb
This horizontal member of the saw frame is made from 1/2 in. square mild-steel. Again, the work is centred at either end, and one end is shouldered down to form a wringing fit in the frame column, where it is secured in place with a nut and washer. As shown in the drawing, this part is cross-drilled at two points to carry additional fittings.

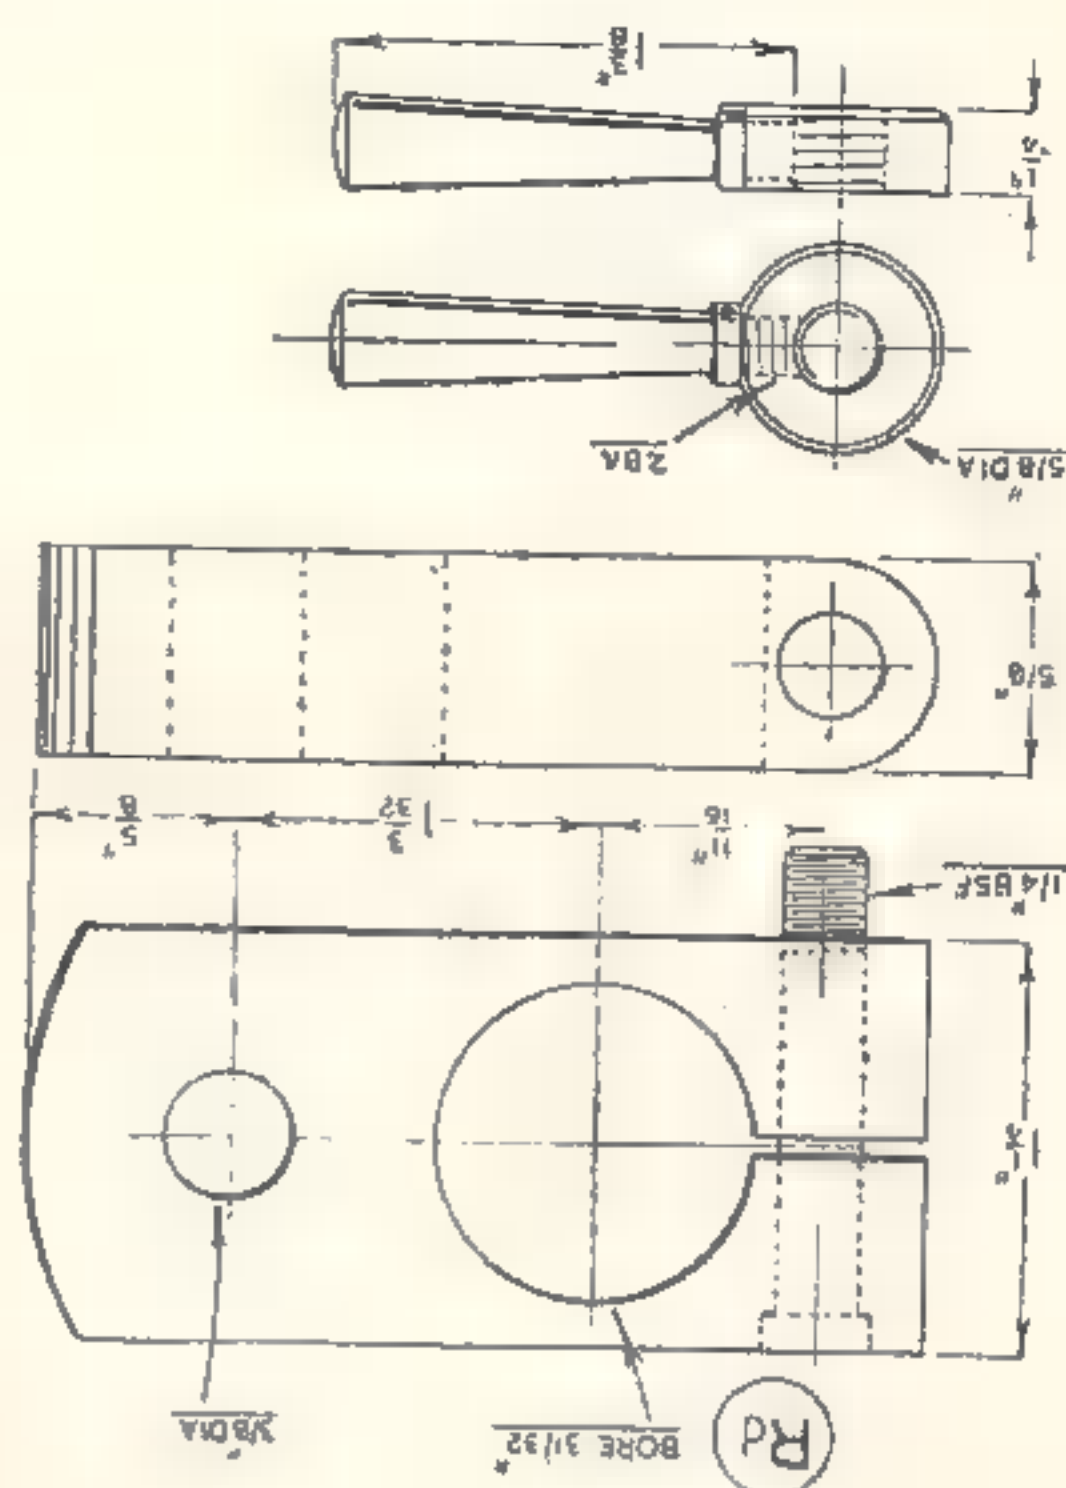


Fig. 31. The cylinder bracket and clamp-bolt

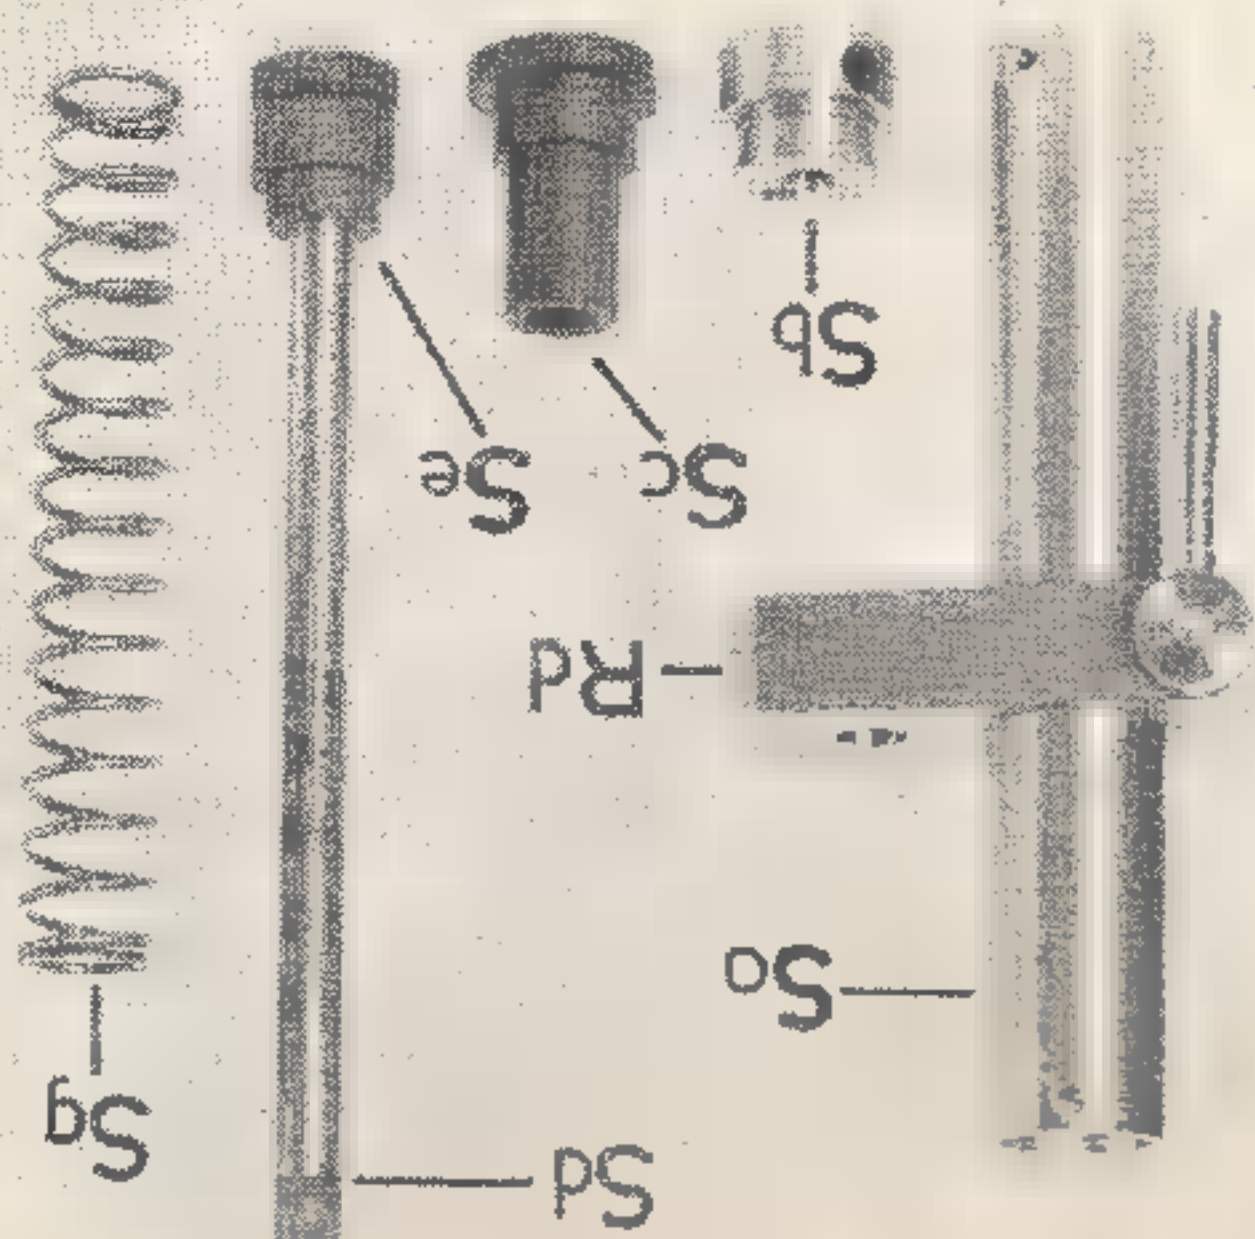


Fig. 32. The cylinder with its fittings

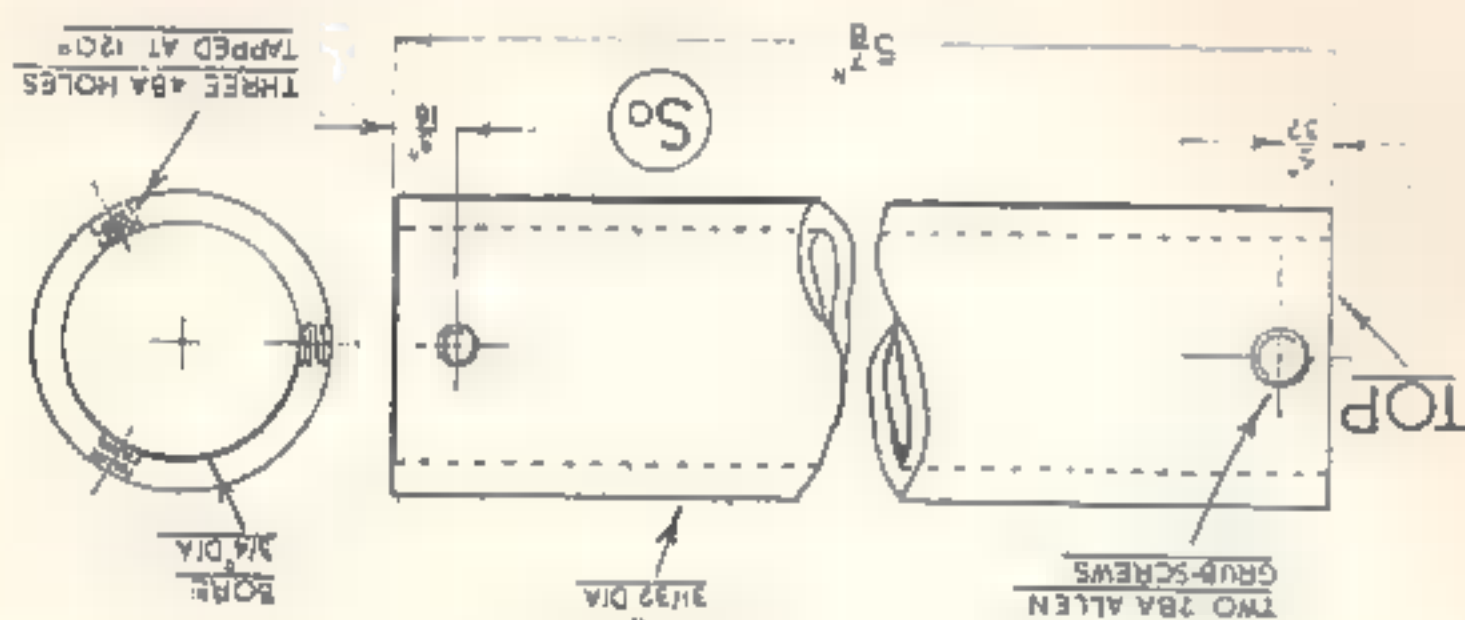
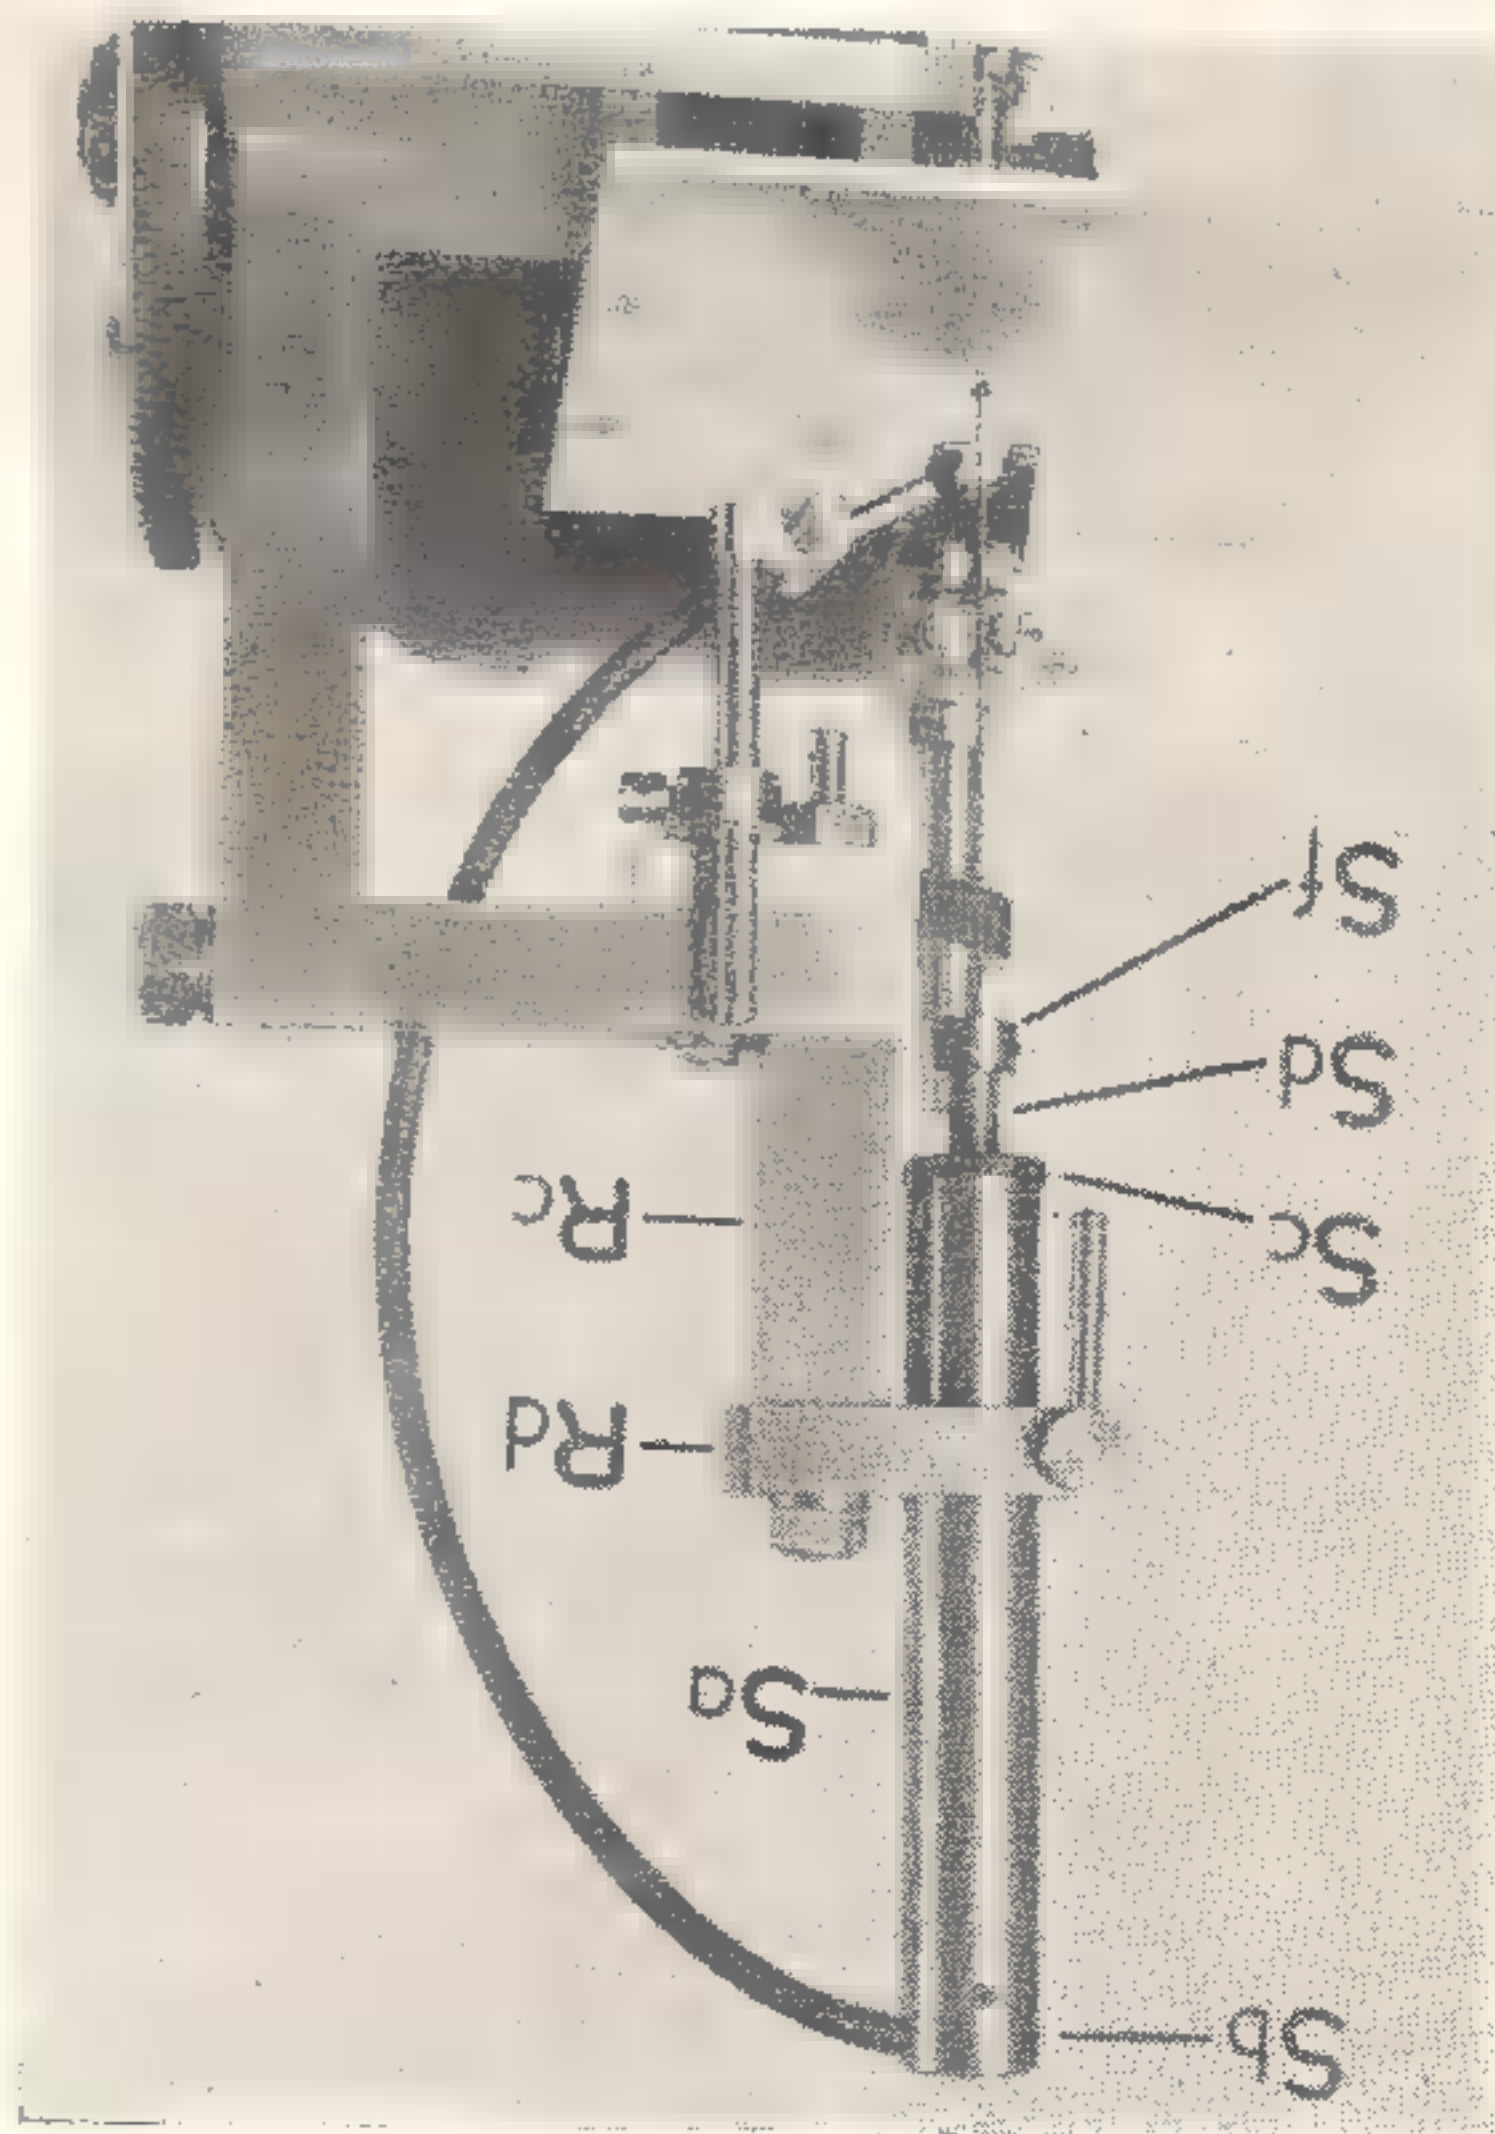
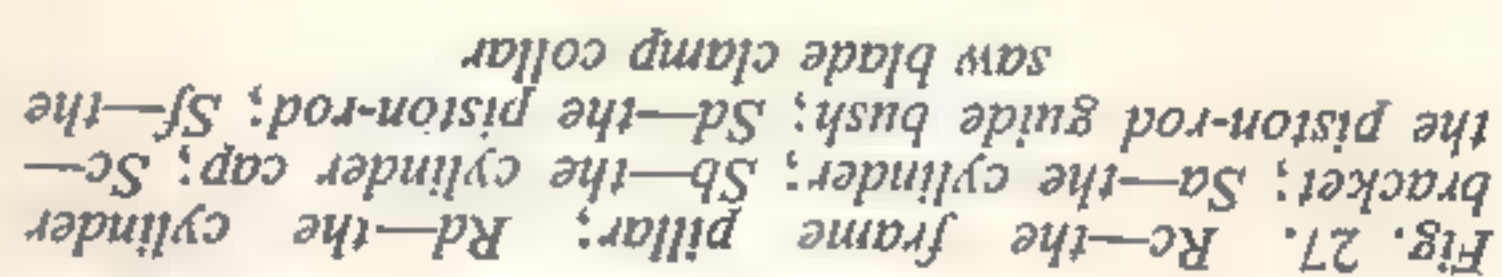


Fig. 33. The cylinder

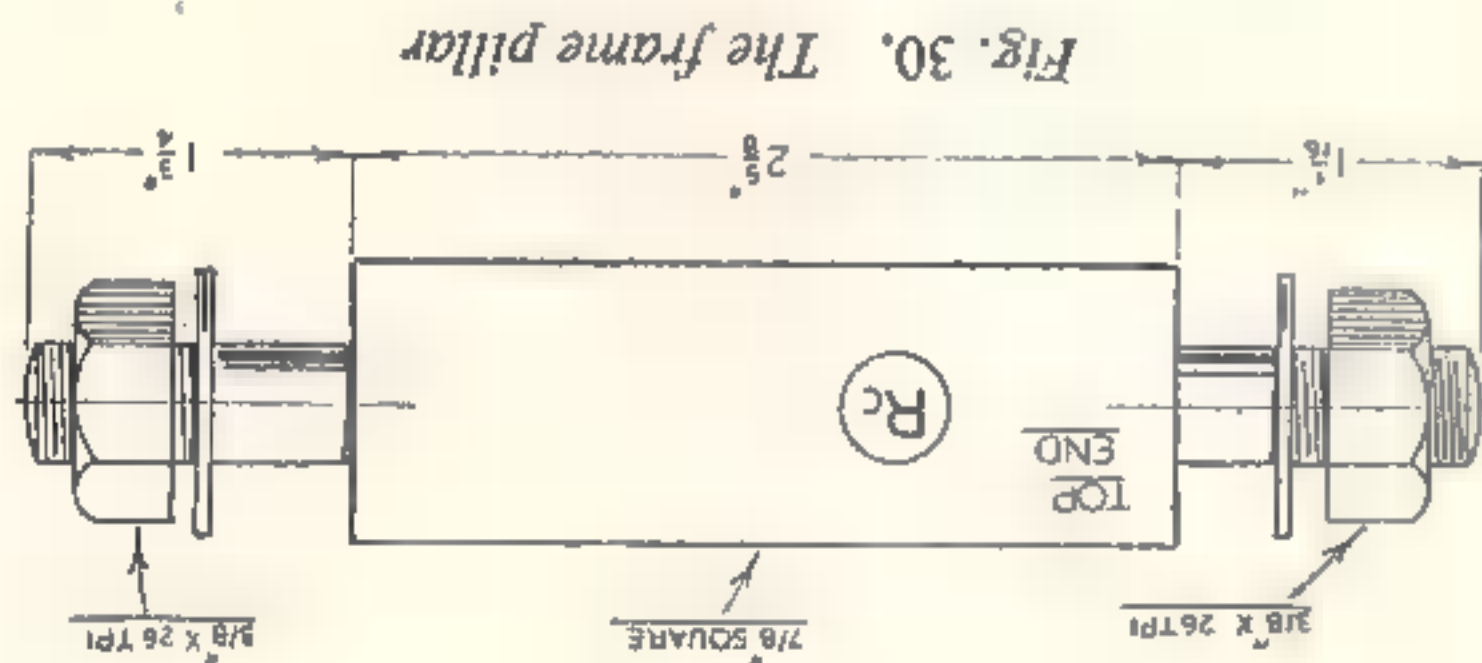


Fig. 30. The frame pillar

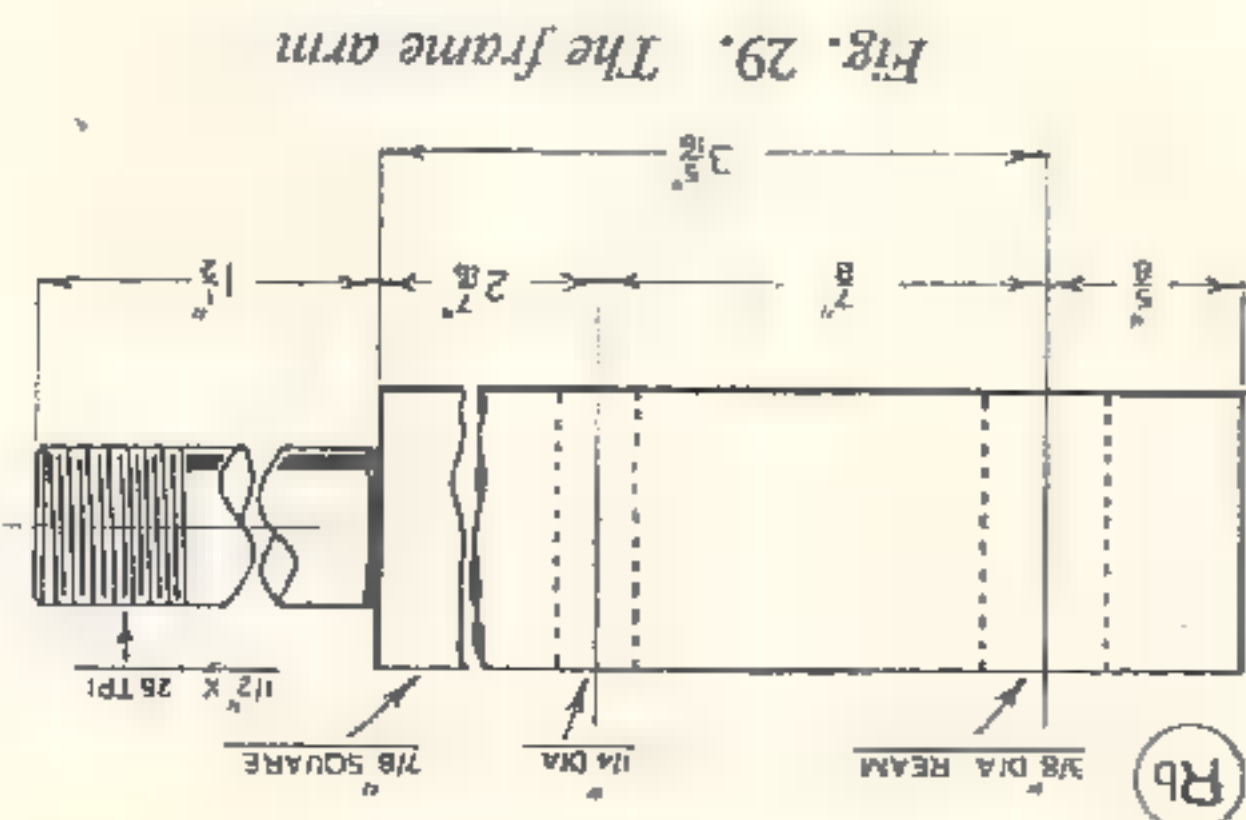


Fig. 29. The frame arm

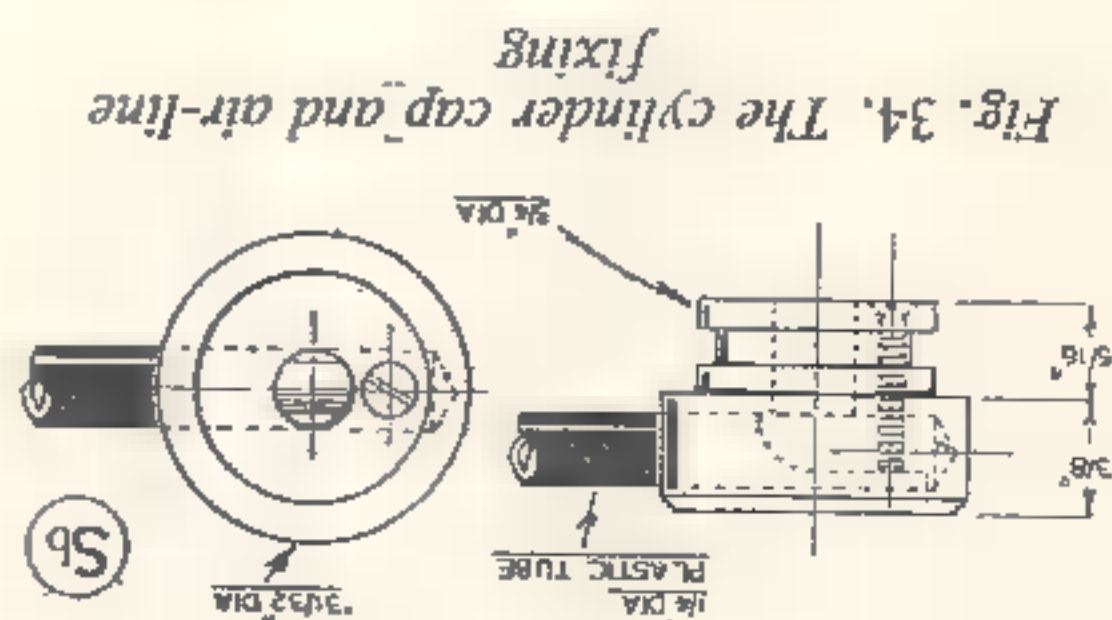


Fig. 34. The cylinder cap and air-line fixing

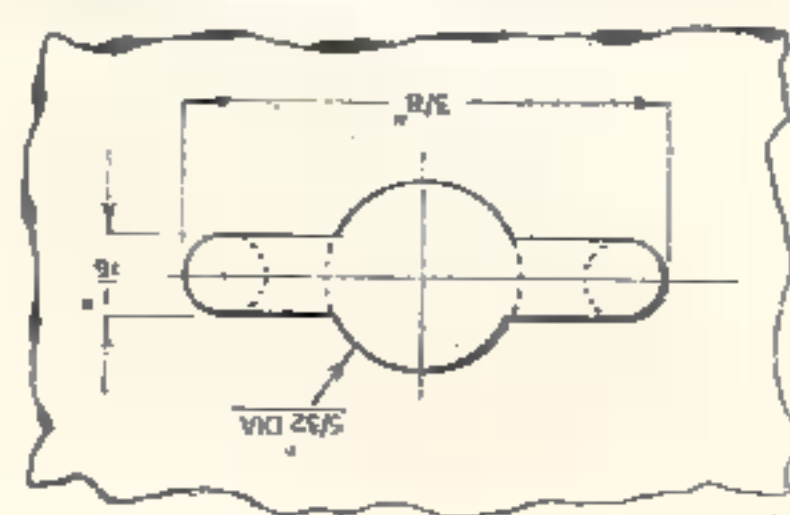


Fig. 38. Showing the dimensions of the blade slot in the saw table



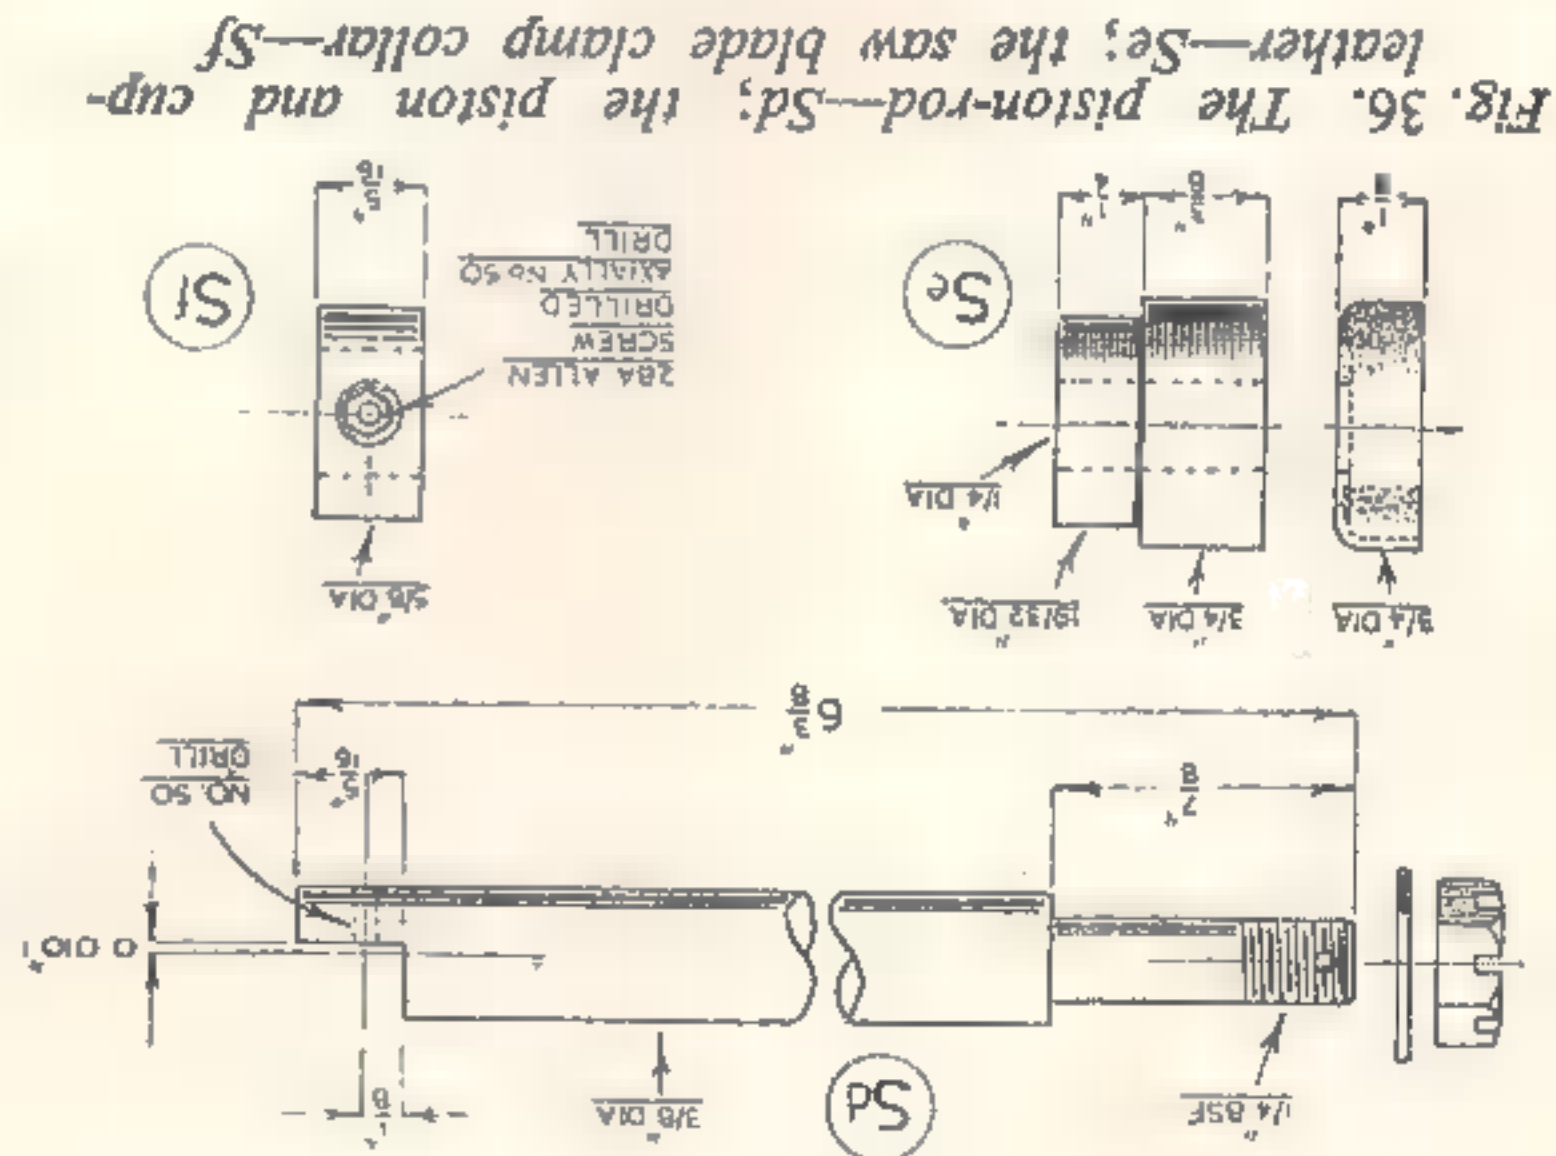


Fig. 36. The piston-rod—Sd; the piston and cup-leather—Se; the saw blade clamp collar—Sf

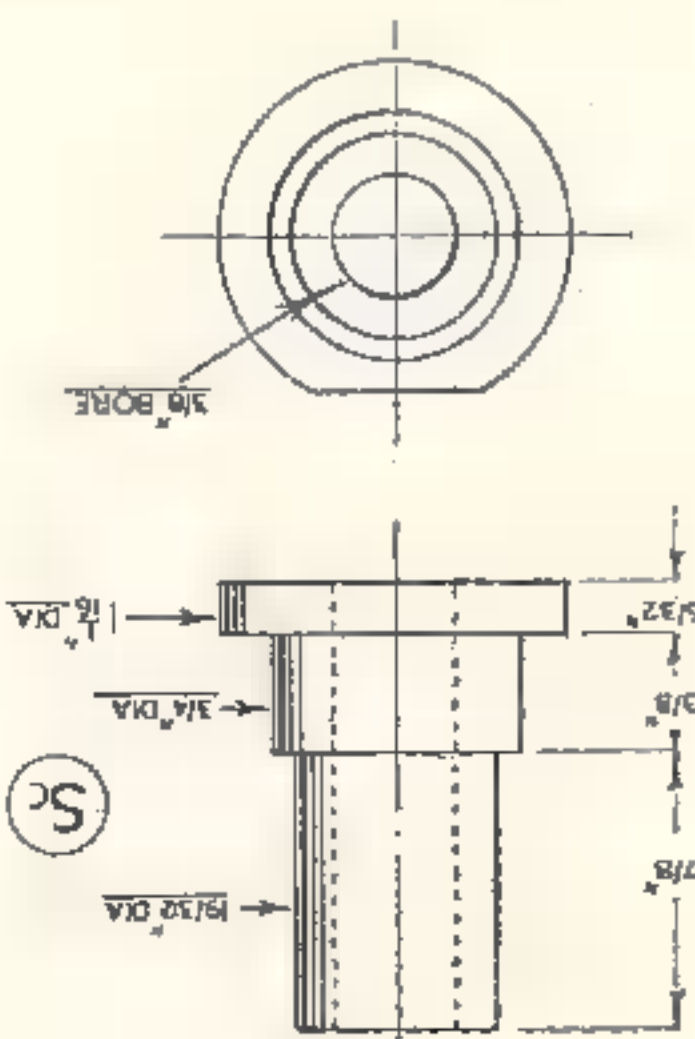

Right: Fig. 35. The piston-rod guide bush

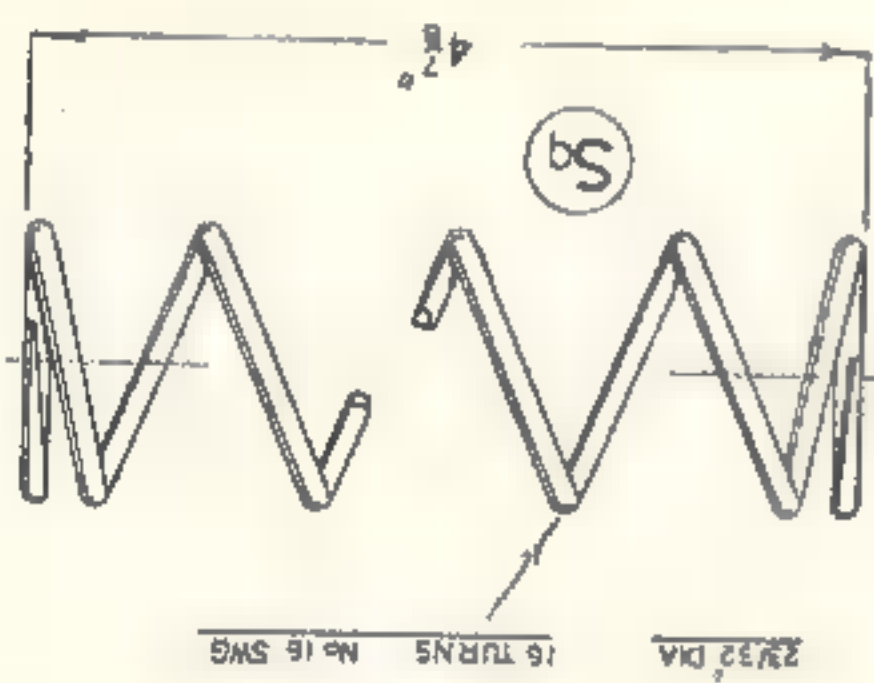

Right: Fig. 37. The blade tension spring

cap (Sb), and the scarfed end of the tube is secured by means of a pointed grub-screw. The air nozzle and its holder are made at a later stage, after the saw guide has been fitted.

Usually there should be no difficulty in determining, by direct measurement, the exact position of the slot in the table for the passage of the saw blade, but if there is any doubt, it is best to drill a 1/8 in. diameter trial hole at the estimated centre. A length of rod is then passed through the hole to check its position, and any correction is made accordingly. The table slot should be kept as small as possible, and should just give working clearance for the thickest blade used.

The pinned varieties of Eclipse saw blades are most suitable for use in the machine; these are fitted with a driving pin at either end to anchor the blade in the holes drilled in both the driving collars and their set-screws. It will, however, be found necessary to shorten the pins by filing their ends, so that they will enter the drive collars and will also pass through the table slot.

After a saw blade has been fitted, the machine can be given a trial run, but sawing should not be attempted until the attachment for guiding the blade and taking the cutting thrust has been added.

(To be continued)

The Frame Pillar—Rc

This part is dealt with in the same way, but it is shouldered down at both ends for mounting in the frame arm and for carrying a bracket at its upper end.

The Cylinder Bracket—Rd


This component can now be fitted to the frame pillar, but the bore at the outer end should be machined later to fit the finished cylinder.

This form of built-up construction for the saw frame will be found amply rigid if the fitting is reasonably accurate; moreover, it has the advantage that some final adjustment of the alignment of the saw blade in relation to the table, can be made by altering the setting of the various joints. However, every care should be taken, by checking from time to time, to ensure that the parts are correctly made and fitted; the saw blade will then come automatically into line with the other components in the finished machine.

The cylinder, made of heavy-gauge steel tube, serves as a guide for the piston assembly forming the upper attachment of the saw blade. The cylinder and piston also act as an air pump for blowing away the swarf collecting on the work and obscuring the marking-out lines. Where a length of commercial tubing is used for making the

The spring (Sg) fitted to the piston-rod tensions the saw blade and maintains the tension during the return stroke. Too strong a spring will cause needless wear of the working parts, but if the spring is too weak, a light saw blade may tend to buckle on the return stroke. The initial tension on the blade is set by adjusting the position of the cylinder in its clamping bracket.

The collar (Sf) for anchoring the upper end of the saw blade is identical with that already fitted to the drive-rod at the lower end. The plastic tubing, forming the air line, is made a push-fit in a hole drilled nearly across the cylinder

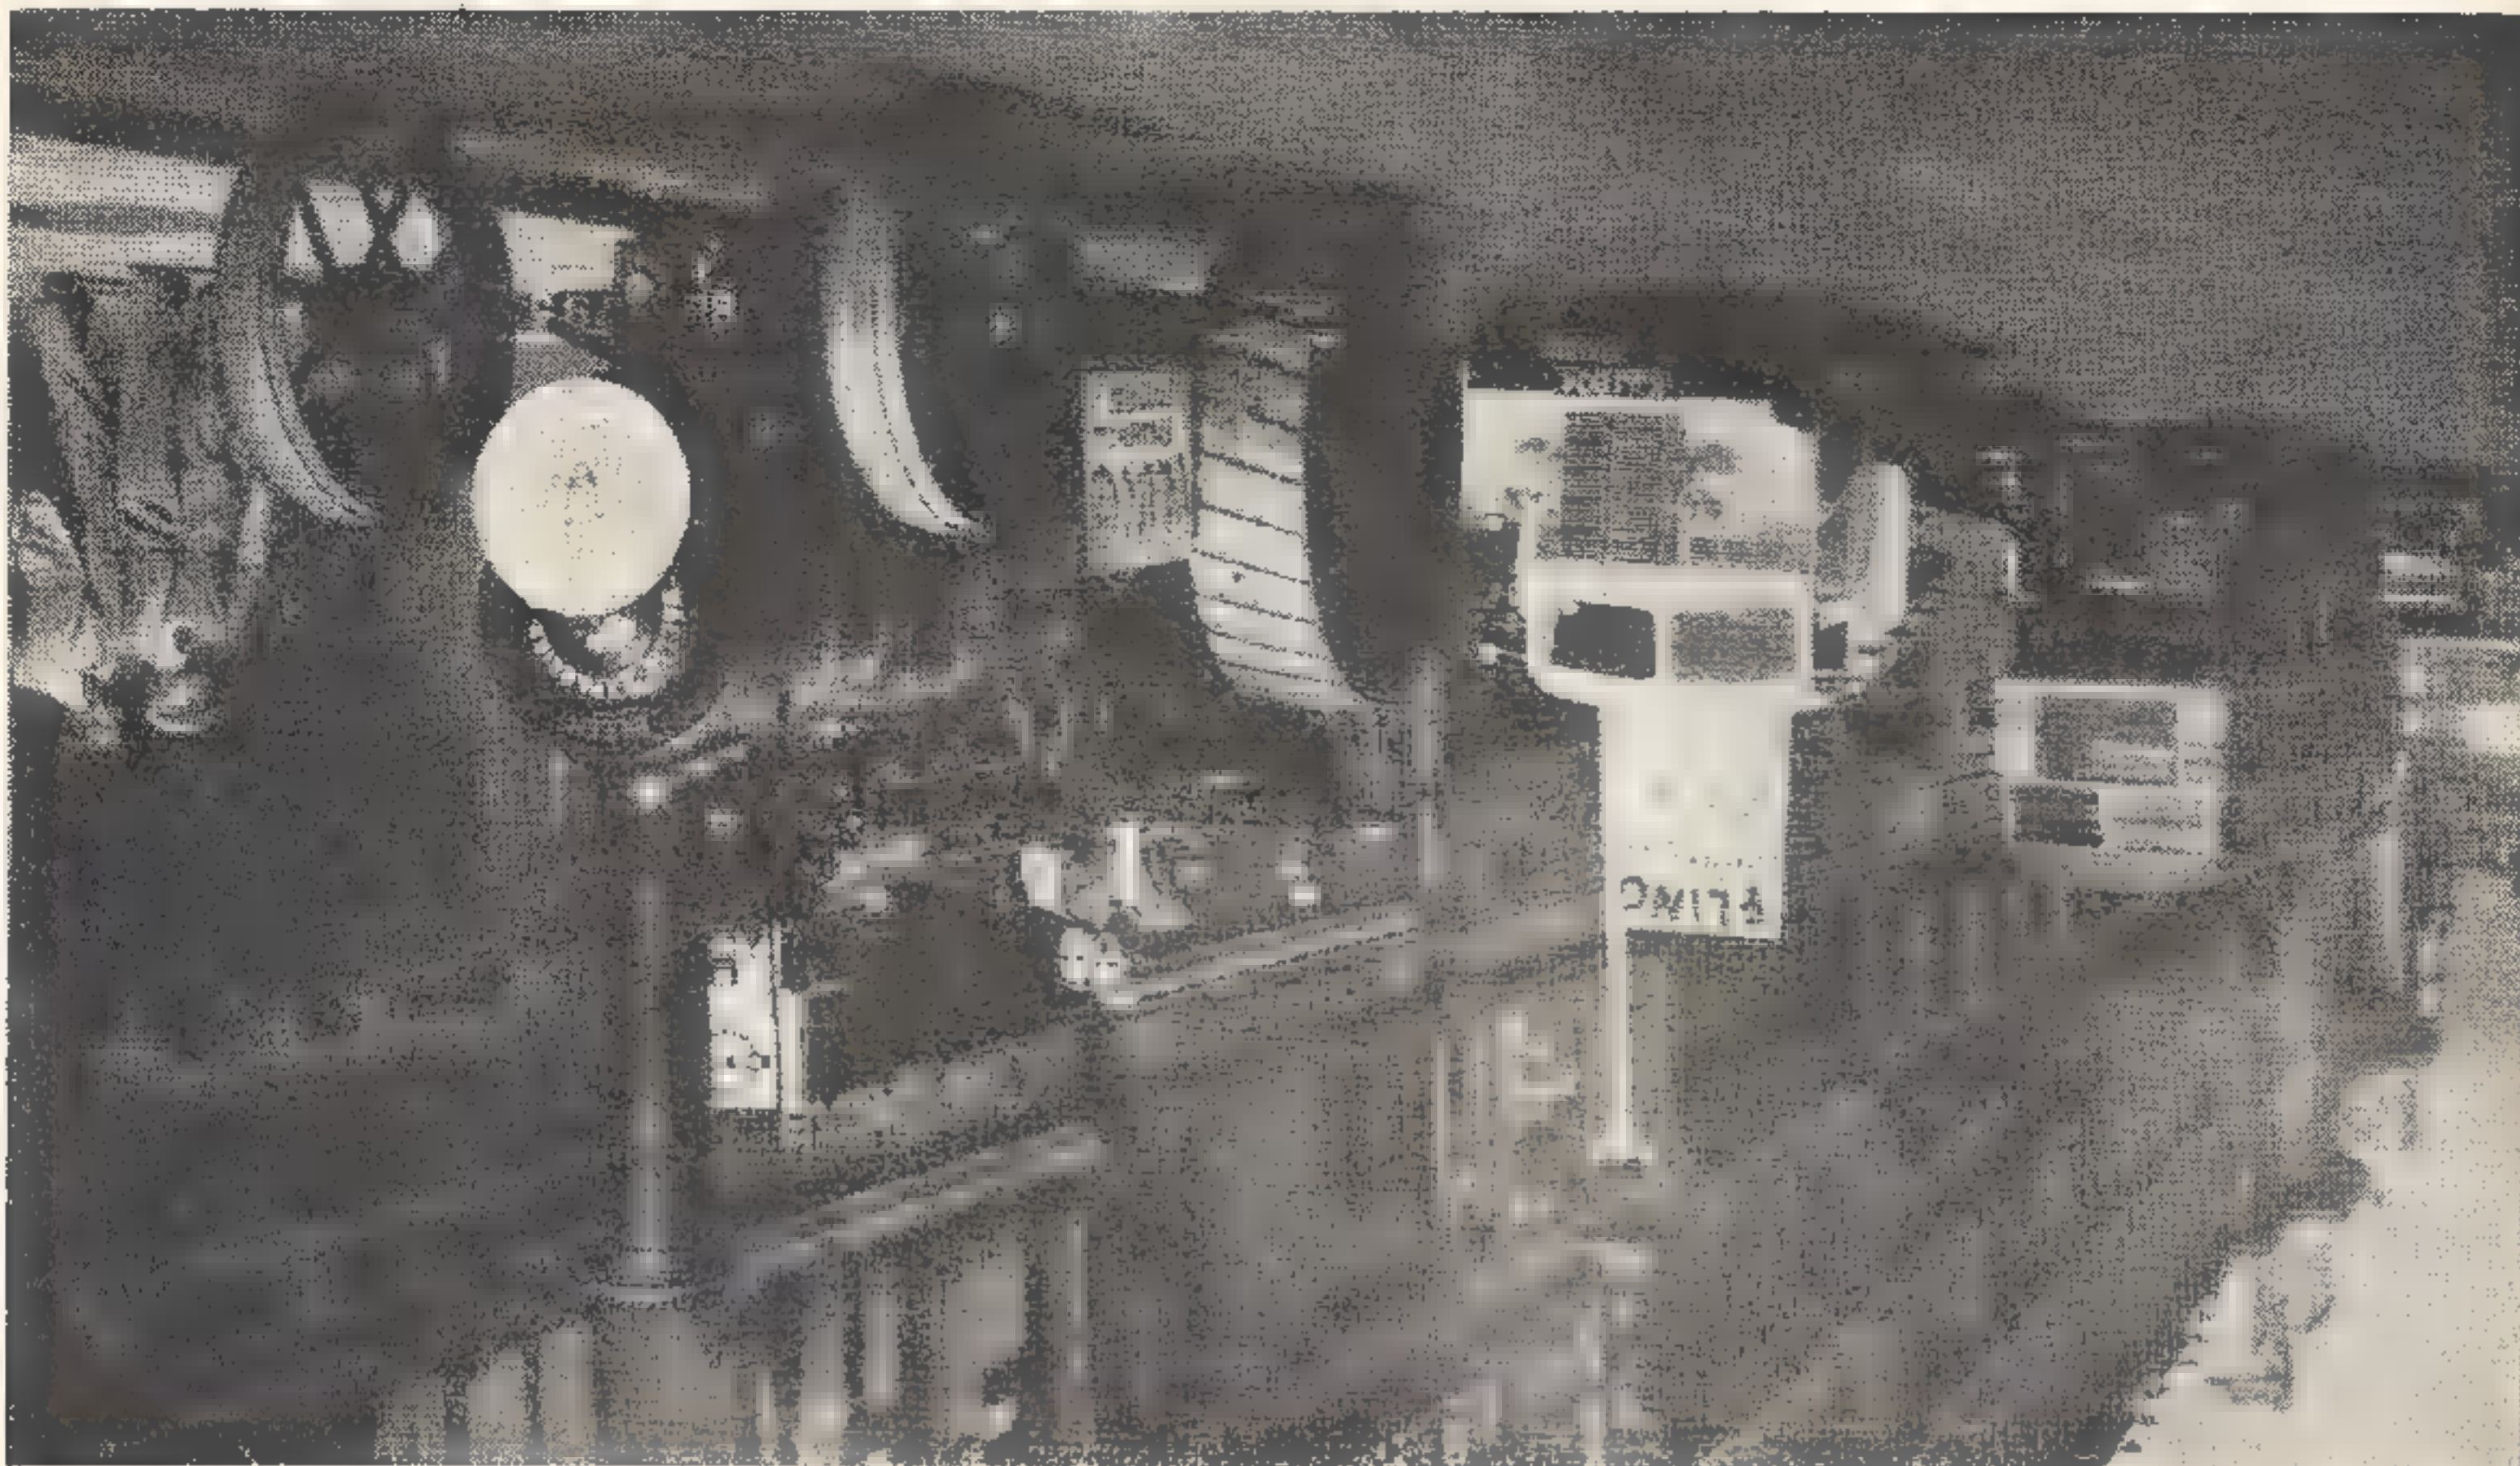

BY TRACTION ENGINE

THROUGH LONDON

By G. Romanes

EILEEN-THE-ERRING has been my companion for some years now. She is a traction engine from Wallis & Stevens, a 7 n.h.p. expansion engine, whom I rescued from the County War Committee and put her into retirement. She ceased to be used as a purely agricultural engine and has become an adventuress. Together we went to Nettiebed to race three years ago, and she caused me to cross the path of the Law to my cost and every-body's amusement. On top of that she lost the race, but she instituted a new sport. The next year she fell off a lorry, and this year she has borrowed an idea from the Ski Club and won a slalom race. Not content with this record, she was invited to London to the "M.E." Exhibition to announce the presence there of a refreshment beverage.

We went to London in steam, but were carried there on a low loader. We unloaded in Portland Place at 11.0 a.m. and donned three placards. The sun shone on our new paint and the brasswork glittered. We set off in fine style with nearly half a glass of water and 100 lb. of steam. At the first traffic light, a bus tried to dip in front of us on the yellow and *Eileen*, living up to her name, scared my wits out by kissing it, in spite of full reverse. Luckily, the conductor did not make a fuss and we went on to Oxford Circus where we were waved across by the police against the lights. It is cobbled there and very rough going even on springs. Regent Street was taken in our stride, because we had a steersman and a rear lookout, Mr. Frank Upton, both of whom were busily engaged navigating a course through the traffic. This task is not rendered any easier by the lack of quick-application brakes when everyone else in the road has them. We came to Piccadilly Circus and encircled Eros without incident, only to be stopped in Piccadilly itself for transgressing the bye-laws about advertising.

Here the wait upset my steaming calculations, and she started to blow off, despite, an open fire door and full injector. We were allowed to proceed after removing the offending glass of water and 100 lb. of steam. At the first traffic light, a bus tried to dip in front of us on the yellow and *Eileen*, living up to her name, scared my wits out by kissing it, in spite of full reverse. Luckily, the conductor did not make a fuss and we went on to Oxford Circus where we were waved across by the police against the lights. It is cobbled there and very rough going even on springs. Regent Street was taken in our stride, because we had a steersman and a rear lookout, Mr. Frank Upton, both of whom were busily engaged navigating a course through the traffic. This task is not rendered any easier by the lack of quick-application brakes when everyone else in the road has them. We came to Piccadilly Circus and encircled Eros without incident, only to be stopped in Piccadilly itself for transgressing the bye-laws about advertising.

My steersman Mr. G. G. Scott, wondered if the announcements on a theatre at Victoria were being displayed in the right place and thought that we should really be carrying them, but *Eileen* went serenely on through Ashley Gardens to the Hall. Here we parked outside for the photographers to indulge themselves while we took it in turns to go into the exhibition, one of us remaining to keep *Eileen* company, as she was in steam, and to answer numerous questions. We arrived at 12.30 p.m. and after 2½ hours we loaded up again for the homeward ride without incident, itself a remarkable feat in view of our lunch which was true to tradition. We should like to congratulate Mr. Withers, the Exhibition Manager for the magnificent staff work providing transport, water, and moral support when dealing with the Law. Without his efforts I should never have realised a life-long ambition, or day-dream, although probably the most difficult piece of traction engine driving I've ever indulged in at any time.

placards and I remember wondering if the people in the Ritz would ever appreciate life as I was at that moment while passing it! We took water (60 gal.) from a hydrant in Grosvenor Place, more to please the Water Board man, who was beginning to look almost tearfully as though his day was being wasted, than for any other reason.

The Isle of Wight Exhibition

THE Isle of Wight Model Engineering Society returned to Newport for their 1953 exhibition, after having given the island's capital a miss in 1952. Models shown were more numerous than at last year's exhibition, but not quite up to the record, although it seems

made by the vicar of the parish. The latter gained a "Commended" from the judges, but the former were not for competition. Other interesting exhibits included an electrical "noughts and crosses" machine, which remained unbeaten throughout the course of the show, and the

ties Training School, the apprentices being *ex officio* members of the society, competing each year for a cup given by the society's president, Sir Allott Verdon-Roe. The lads were engaged in the construction of a 25 c.c. petrol engine, designed especially for the purpose by themselves, and the workmanship displayed drew approval from all quarters. This exhibit was under the direction of the principal of the school, Mr. V. T. Stevenson. The County Director of Education, who presented the awards was full of praise for the exhibition, and stated

that the excellence of the workmanship in all classes improves each year.

Messrs. R. G. Bosberry (Fareham) and W. G. Pope (Chichester) were the judges, and they deliberated over their job for some four hours before announcing their results. In contrast to previous years, when it has been the custom to have practically an "all island" show, models came from all parts of the Southern Federation of Model Engineers, and in addition, an excellent "OO" gauge L.N.E.R. "B.1" came all the way from Co. Durham. Naturally, there were more fresh models than ever before, and these ranged from a pair, identical, of partly completed 0-4-2 Tank locomotives, based on the old I.W. Central No. 3, by Messrs. Slaughter of Freshwater and Gilbert of Cowes, to a portion of the model of Newport Parish Church,


oldest model on show, a horizontal engine made by the late J. Samuel White of Cowes, founder of the famous firm of ship-builders, when a boy. Probably the most interesting "exhibit" was a workshop, in full production. This was staged by Messrs. Saunders Roe, Appren-

★ Our Cover Pictures

Readers of THE MODEL ENGINEER are invited to submit for consideration photographs which may be suitable for cover pictures. The subjects must be within the scope of this journal and reference to the covers of this year's issues of the "M.E." will give an indication of the type of photograph preferred. If accepted for publication, a reproduction fee of two guineas will be paid. Prints should be addressed to . . .

The Managing Editor
THE MODEL ENGINEER
19-20 Noel Street
London, W.1

that to come along was an education in itself. The Championship Cup for the best model in the show went to Mr. S. Slade for his 3½-in. gauge G.W.R. 9400 Panmier Tank, and the Visitors Cup was won by Mr. J. Wallace for his 1-in. scale model jeep, built in the Far East.

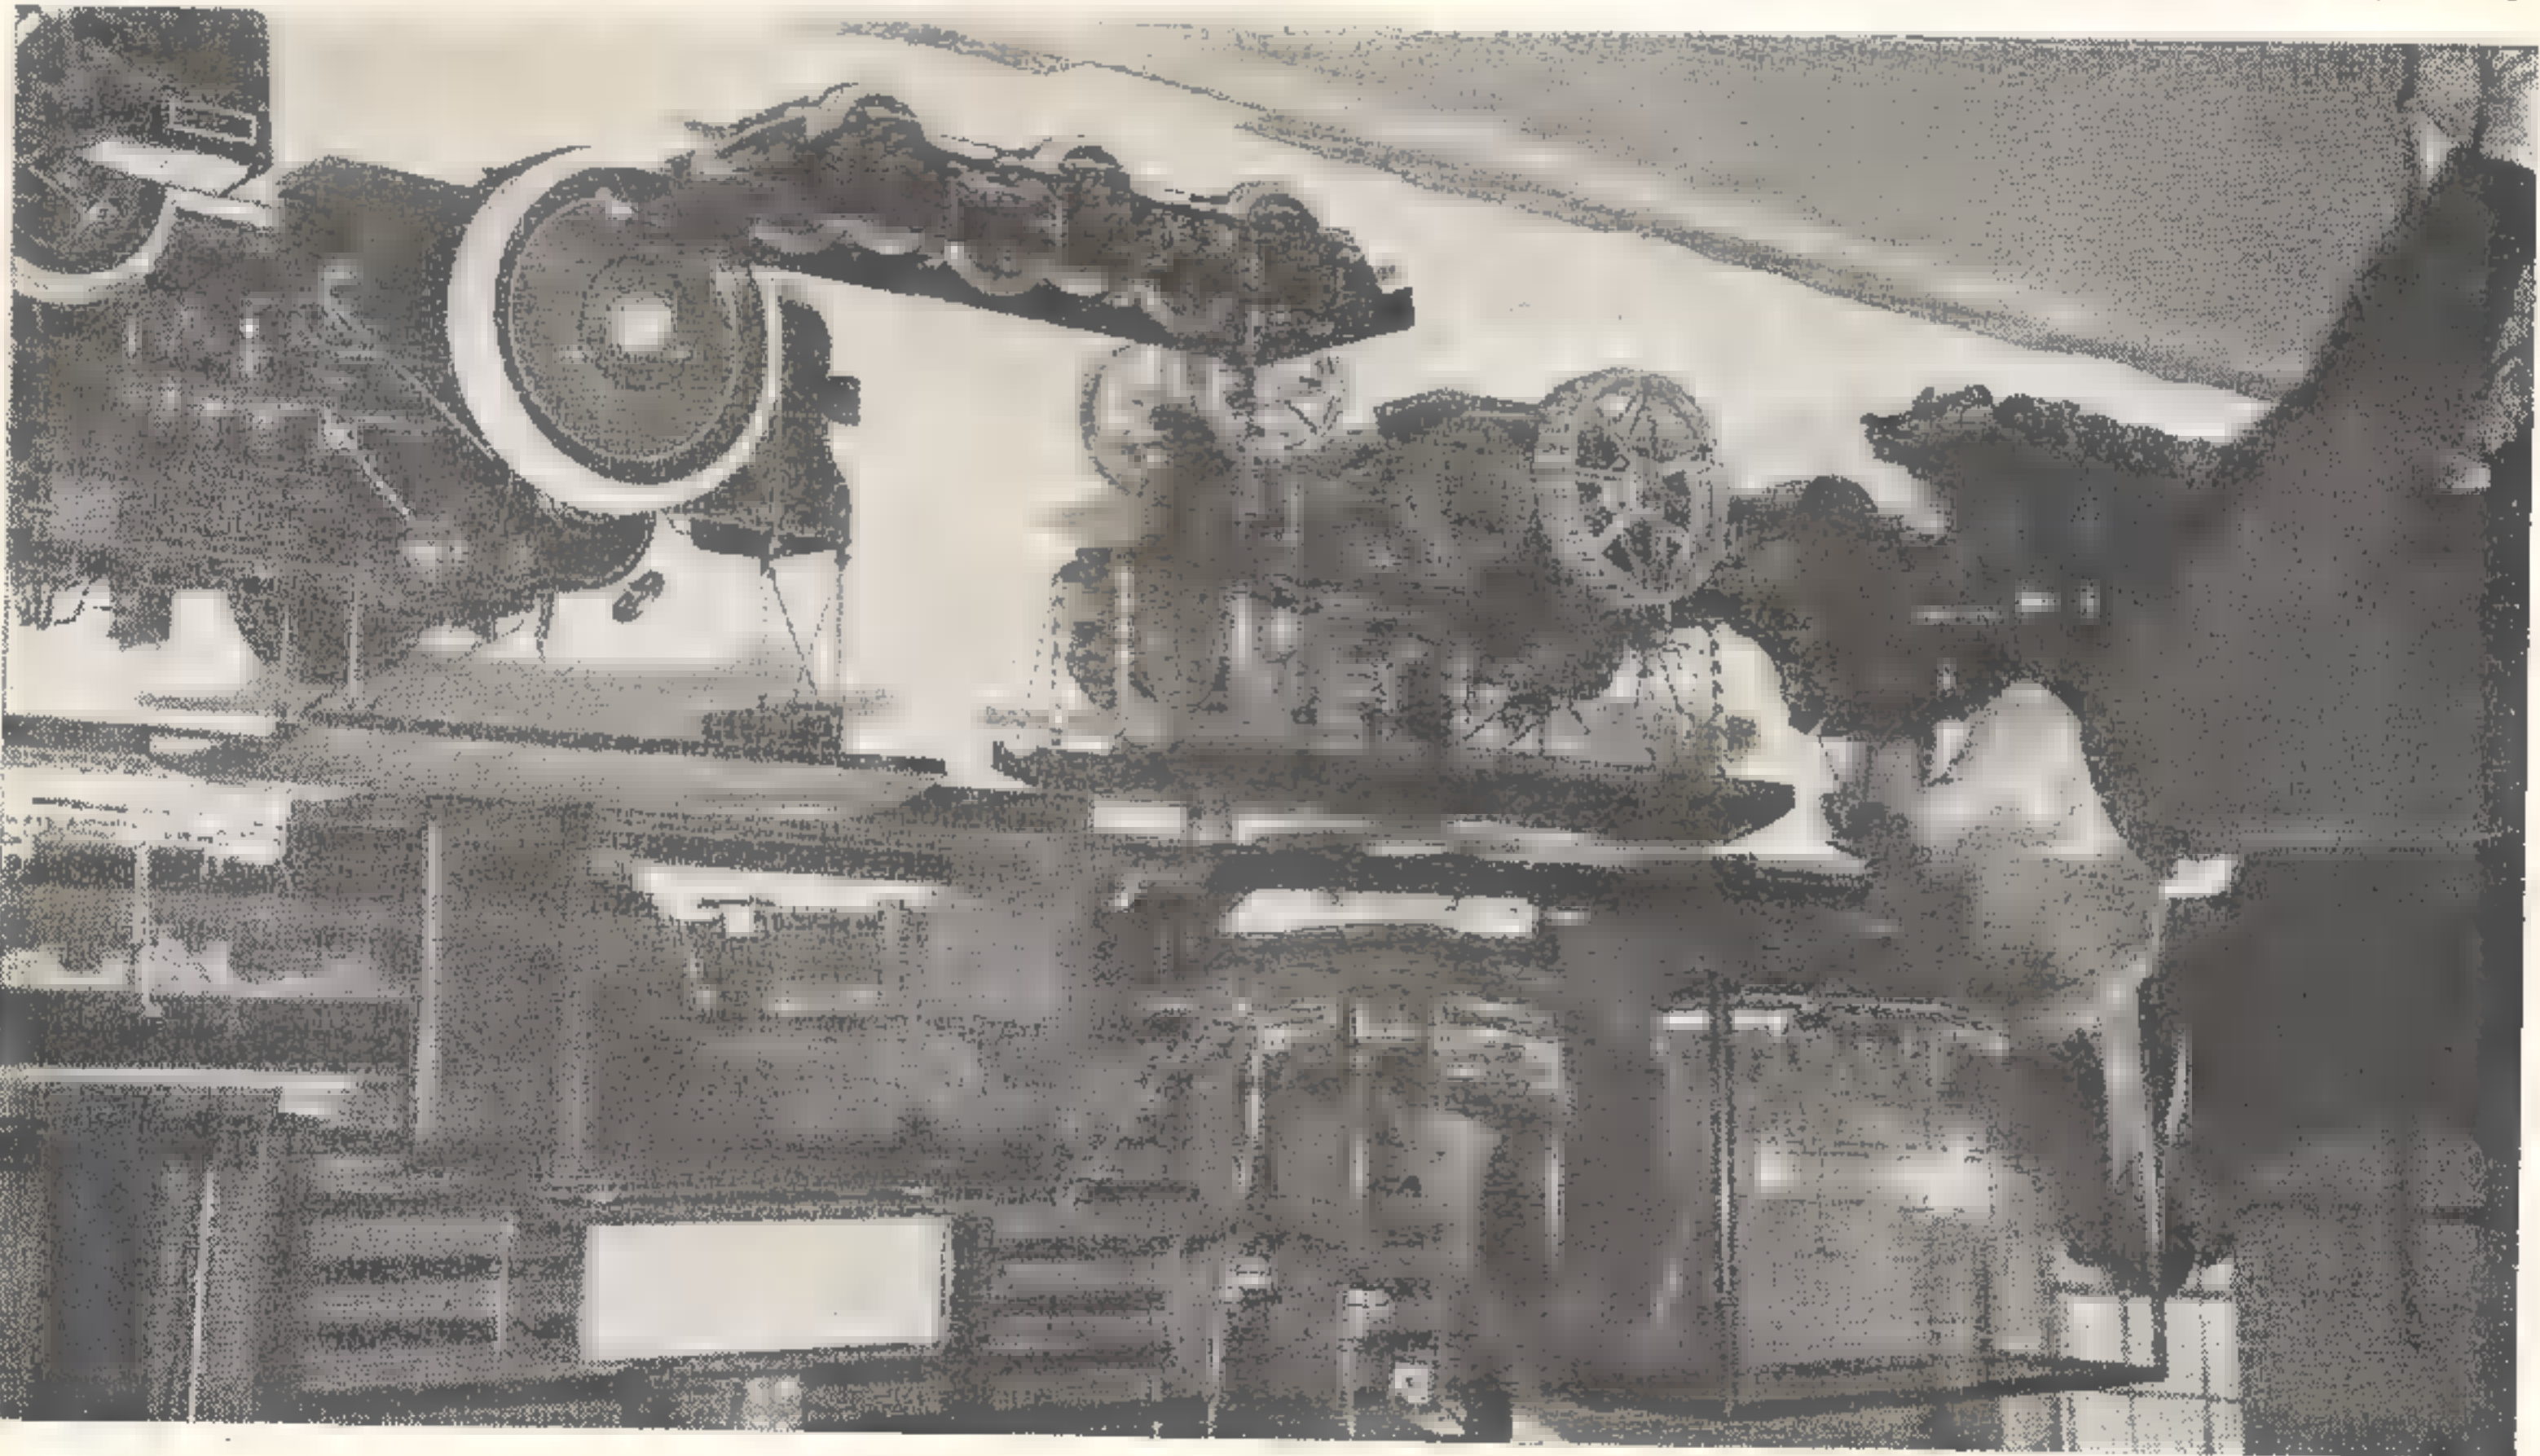

WITH THE CLUBS

The judges were Major Dunbar and Messrs. Rumens and Noble.

At the general meeting held on the same evening, final details for the forthcoming combined societies exhibition, in which we shall be taking part, were discussed. This is to be held at the Drill Hall, Ashford, on Friday and Saturday, October 16th and 17th, under the auspices of the Ashford Chamber of Trade.

Hon. Secretary: C. B. BUTCHER, 63, Hythe Road, Ashford, Kent.

WAKEFIELD & DISTRICT S.M.E.

We are holding an exhibition of models of all kinds from local societies and their members will be very welcome at the exhibition. We shall be glad of the loan of models of all kinds from local societies and their members will be very welcome at the exhibition. We shall be glad of the loan of models of all kinds from local societies and their members will be very welcome at the exhibition.

"Struma," Park Lane, Pontefract.
Hon. Secretary: J. C. LEA, A.M.I.R.T.E., our members at the stands or contact the members, but make yourselves known to any of our members will be very welcome at the exhibition. We shall be glad of the loan of models of all kinds from local societies and their members will be very welcome at the exhibition.


Bolton ■ District S.M.E.
The society has been re-constituted and will in future hold meetings in the Co-operative Hall, Bridge Street, Bolton, at 8 p.m., the last Monday of each calendar month. It is hoped that several interesting lectures will be given on varied subjects during the forthcoming winter session. That grand old model-maker, Mr. T. P. Longworth, has consented to continue as president, and our long-service treasurer, Mr. P. Smith, will continue to hold that office.
On Monday, November 30th, there will be a members' private exhibition, when the C. A. Hays Memorial Trophy will be awarded

Ashford & East Kent M.E.S.
On September 23rd, members met at the headquarters to compete for the first time for an annual award of £5, generously donated by the president, Dr. B. Roberts. The second prize of £1 was awarded from club funds. The results were as follows: (1) J. Hanson, "Britannia" class loco. (£5); (2) K. Linkers, "Schools" class loco. (£1); (3) L. Chaney, L.N.E.R. Pacific (highly commended).

The next regular meeting will be held at the clubroom on Wednesday, October 28th. Hon. Secretary: C. S. DIBBLE, 96A, Holland Road, Harlesden, London, N.W.10.

West London Society of Model Engineers
The club, in future, will be known as the "Wilkesden and West London S.M.E." but the address will be the same, that is, St. Jude's Church Hall, Lancesfield St., off Kilburn Lane.
On September 12th and 13th, the club held its really big outdoor event at the Wilkesden Show. Not only did we have track running to full capacity, on both days, but we also had a good number of exhibits on view, both finished and unfinished, in one of the tents of the show.
Among the four engines running was the very fine Halton tank. The club's Ajax, though not quite finished, showed her real pace on the track for the first time.
The weather was good on both days and all members gave their support and deserve thanks for their work both in the tent as well as assisting at the track.
New members are always welcome and if they call at the clubroom any evening they will find somebody there who will do his best to assist in all ways possible. Although the clubnight is a Wednesday, the room is open and all is available on six days a week. The clubroom is now well supplied with tools, as well as three lathes and two vertical drills.

Trying a little persuasion in the Steering Competition at the West London Model Power Boat Club Regatta at the Round Pond, South Kensington on a recent Sunday

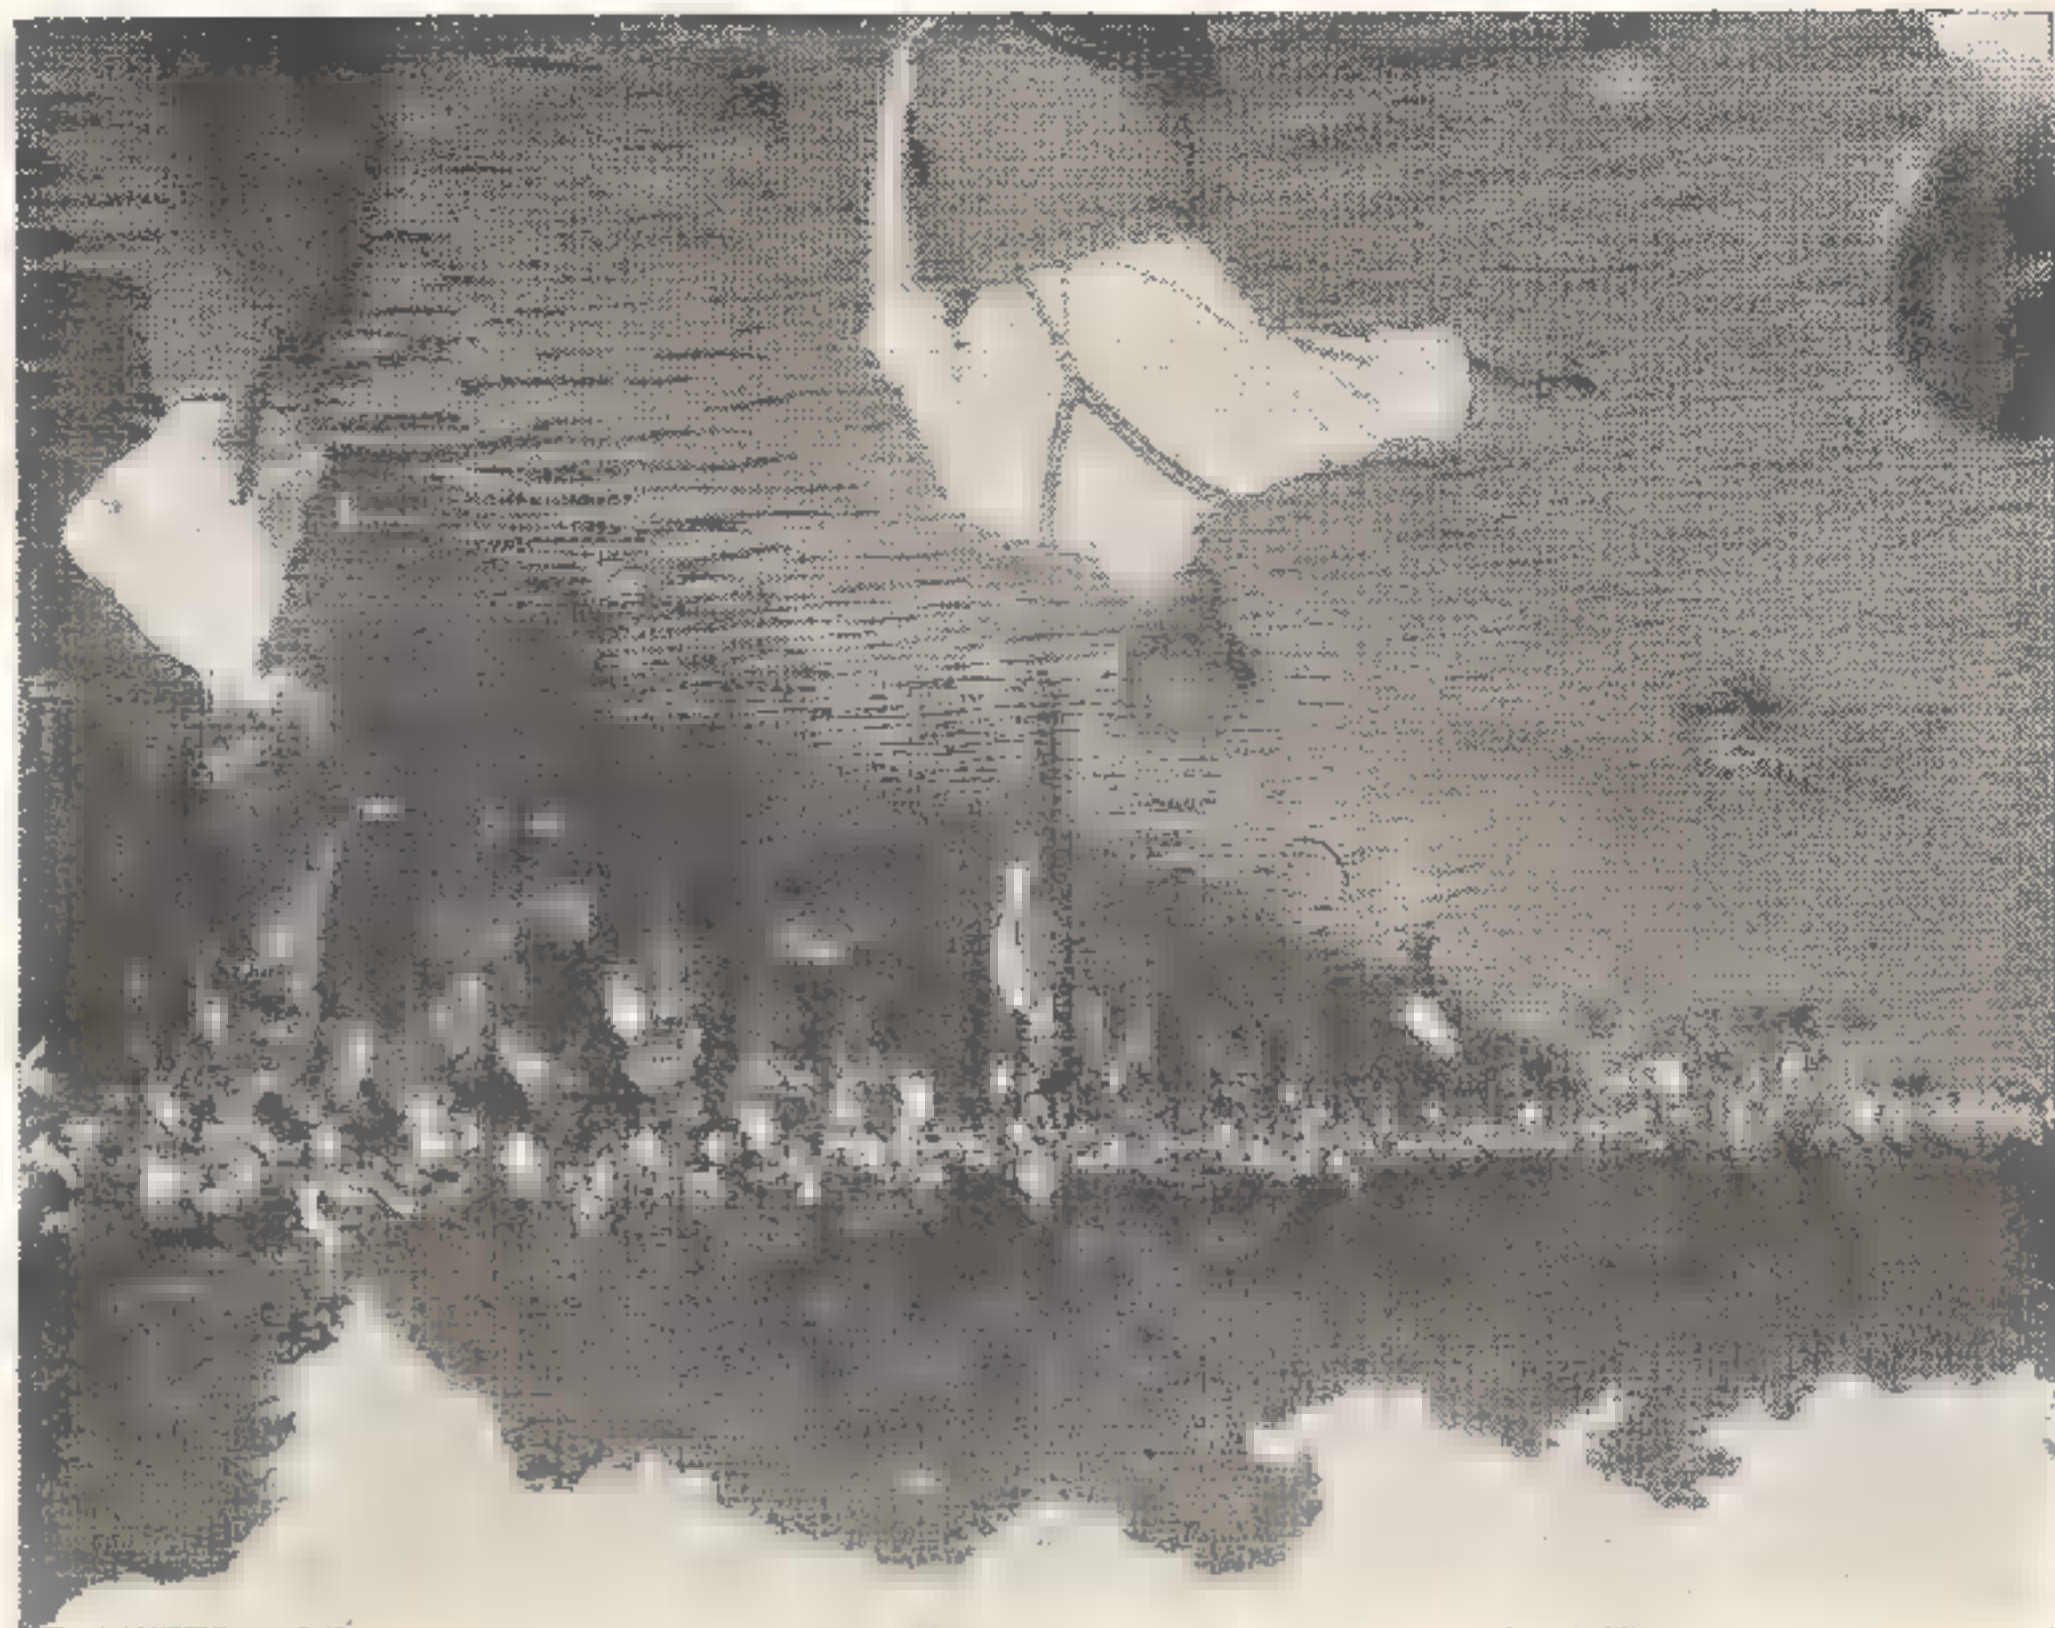

NOTICES

The Model Engineer is sold subject to the following conditions: That it shall not, without the written consent of the publishers, be lent, resold, hired-out, or otherwise disposed of by way of Trade except at the full retail price of 9d., and that it shall not be of in mutilated condition or in any unauthorized cover by way of Trade; or affixed to or as part of any publication or advertising, literary or pictorial matter whatsoever.

All rights in this issue of THE MODEL ENGINEER are strictly reserved. No part of the contents may be reproduced in any form without the permission of the publishers.

The Annual Subscription is £2 2s. 0d. post free, to all parts of the world.

The Managing Editor invites correspondence and original contributions on all subjects. Correspondence and manuscripts should not be addressed to individuals, but to the Managing Editor, THE MODEL ENGINEER, 19-20, Noel Street, London, W.1.

October 19th, 20th, 21st, 22nd, 23rd.
Cambridge & District Model Engineering Society.—Model engineering exhibition at the Corn Exchange, Cambridge.

October 21st, 22nd, 23rd and 24th.
Huddersfield Society of Model Engineers.—Exhibition in the Drill Hall, St. Paul's Street, Huddersfield. Open from 10.30 a.m. to 10.0 p.m.

October 31st.—Marlow Society of Model and Experimental Engineers.
Annual exhibition of models and handcrafts at the Church Hall, Marlow, Bucks.

November 6th and 7th.—Shrewsbury Society of Model and Experimental Engineers.
Exhibition at the Technical College, 7 to 9 p.m., first day; 2.30 to 5 p.m., second day.

November 6th, 7th.—Wakefield Society of Model and Experimental Engineers.
Exhibition of models at Service House, Providence Street, Wakefield. Open from 3 p.m. to 10 p.m. on November 6th and from 11 a.m. to 9.30 p.m. on November 7th.

November 28th, 30th, December 1st, 2nd, 3rd, 4th and 5th.
Glasgow Society of Model Engineers.—Exhibition at the Christian Institute, 70, Bothwell Street, Glasgow. Opening 10.30 a.m. to 10 p.m. first day; thereafter 10 a.m. to 10 p.m. daily.

The considered best exhibit by a member of the society.
Old and new members will be cordially welcomed at any of the monthly meetings. Will other societies, etc., kindly note the new secretary's name and address.

Hon. Secretary: M. C. B. ARTHUR, 5, Limefield Road, Smithills Dean, Bolton.

Topsham Model Engineering Society
The three-day exhibition we held at the Church Institute Rooms recently proved very successful, especially as it was our first attempt. The society has benefited quite a bit financially and several new members have joined us as a result.

We hope to hold another exhibition in two-three years' time when we expect to have a complete new lot of models on show. With the exception of an odd one or two, all the models, etc., were home-made; none had been borrowed from outside clubs.

Hon. Secretary: G. W. BELL, Pinehurst, Exton, Devon. Phone: Topsham 8194.

MODEL ENGINEER
DAILY

473

Rates for displayed advertisements in this section 35s. per single column inch 17 inch wide.

MODEL ENGINEER

CLASSIFIED ADVERTISEMENTS

The Advertisement Manager reserves the right to refuse or suspend advertisements without giving any reason. No definite date of insertion can be guaranteed. Every care is taken to avoid mistakes, but the publishers cannot be held liable in any way for printing errors or omissions. Receipt of "copy" for publication implies acceptance of these conditions by the advertiser. Whilst every care is taken to exclude advertisements from doubtful sources, no responsibility can be accepted by the publishers for the bona fides of advertisers.

WORKSHOP EQUIPMENT

Buck and Ryan for Lathes and Access-

ories, drilling machines, grinders, electric tools, surface plates, etc.—310-312, Euston Road, London, N.W.1. Phone: Euston 4661. Open 8.30 a.m.-5.0 p.m. Saturday, 1.0 p.m.

"Impetus" machines, wood planers, motorised drills, belt sanders, electric motors, paint sprays, air compressors, circular saws, etc. Catalogue.—John Street, Castlefields, Bingley.

Manufacturers' Surplus. 200 new 2½ three-jaw (reversible) scroll chucks (Burnard), new (slightly soiled). BTM watchmaker's lathe adjustable feet. 1 mm. wire chucks (0.8 to 3.0 mm.), tailstock and gap beds.—John Morris (Clerkenwell) Ltd., 64, Clerkenwell Road, E.C.1.

Plated Nuts, Screws, washers, bolts, soldering tags, shank bushes, self-tapping screws, grub-screws, socket-screws, wood-screws. Large quantities or gross cartons. List sent post free.—SINDEN COMPONENTS LTD., Dept. C, 117, Churchfield Rd., Acton, W.3. Acom 8126.

P.D.5 3 PORTASS

S.S.S.C. LATHE

Dep. M.E. C. Portass & Son, Works, Sheffield

Stamp please

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

Immediate Delivery from Stock. Myford M.L.7 lathes, Grayson, Super Adapt lathes, bench planer, shapers, electric motors, small tools.—R. W. KUBACH, 12, Sylvan Road, London, S.W.9. LIV. 3311/12.

SHEET

Bright Mild Steel Strip. 1/4" = 3s. 26-2, 6/- doz.

8" x 6" x 23, 8/- doz.

12" and 1/2" x 12, 4/- doz.

1" x 1/2" = 14, 6/- doz.

1/2" Rod 1/2" dia. = 10, 2/- doz.

7/32" 20", 6/- doz, 1/2" dia. = 12, 6/- doz.

Steel Tube 1" o.d. = 16-2, 1/- ft.

Post 1/3 under £2. Over free. Send 6d. for 24-page catalogue. Visit our Shop open Saturday. Tel. St. Albans 5951

BOLD & BURNHAM

12/18, Varulam Road (A5), St. Albans, Herts.

M.L.7 Corbett's XL 3½, Malcar, Little John Lathes for immediate delivery. Write now and state your requirements for cash or H.P. Lathe catalogue 2s. 6d.

Sparey's Amateur Lathe Book, 13s. 6d. Winner tipped lathe tools, factory to user prices, no lathe is complete without a set of these tools, 1/2, 1/4 and 1/8 square, £2 10s. set of 8, diamond lapped, 5s. extra. Cash of C.O.D. Buy now from Corbett's (Lathe), Stanton Hill, Sutton-in-Ashfield.

The New 2½ x 10" E.W. Lathe. Unrivalled in its class. Plain lathe £13 4s. Fully convertible to back gear and screw-cutting. Can be obtained on the easiest of terms from 5s. weekly. Send 2d. stamp for details. Buy from the specialists. Monodex revolving centres No. 1 or 2. Morse Taper Shank 3/2, 6d., or four monthly payments of 10s. Adapt lathes, shapers, Perfecto 5" shapers. No interest. Fuss credit terms.—Wanstead Supply Co., 48, High Street, London, E.11.

Wolf Cub Kit, £17 4s., can be obtained from Modern Machine Tools Limited, Mandrel Road, Coventry. Hire purchase facilities are available on third deposit, the balance over twelve months, details upon application.

F Sale. Micrometer, die heads, squares, as new, write.—Robins Tools, 222, West End Lane, N.W.6.

3" B.G.S.C. Bench Lathe, 18" centres, tools, chucks, etc., £18.—27, Tilehurst Road, Wandsworth. Monday or Thursday after 6 p.m.

HARDWOOD WORKSHOP

CARPENTERS'-ENGINEERS'

BENCHES

4ft. £2.15.0

5ft. £3.5.0

6ft. £4.5.0

CAR. C.W.O. PAID

MAL 4464

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.



MODELS AND FITTINGS

Electric Train Transformer, input 200/250 V, output 6-14 variable control, 10s., single-phase motor, 1/2 h.p., £3 15s., 1/4 h.p., £3 10s.—20, Talbot Street, Cardiff.

For Sale. Vertical steam engines, "Munford" single cylinder, 3½ x 3 stroke and 3½ x 2½ stroke.—Kimmings & Sons Ltd., Lyndhurst Road, Worthing.

Locomotives and Vertical Boilers, also boilers brazed.—Tom Goodman, 177, Marlboro Road, Gillingham, Kent.

Working Model Steam Engine (new), 15s. 6d.—Friend, Woodlands Avenue, Weybourne, Farnham, Surrey.

Lukens O.B. 10" Build an "O" gauge live steam loco for Xmas. Complete kits for "Mollyette," 25s.; "Cracker," 16s. 6d. Machine parts to order, 6d. for list.—10, Coldbath Road, Birmingham, 14.

Sale. 1/2" scale traction engine, Spirit fired. Perfect condition, £10.—Horns, 98, Duddington Road, Wellesborough, Notts.

All Castings, boiler material, steel plate and drawings for 1½" scale Burrell single crank compound traction engine, by Every, £9, o.n.o.—Gray, 73, Sangley Road, London, S.W.6.

IMPERIAL MACHINE PLANT

Circular safety type cutter-head high quality tempered steel knives. Tables mounted on machined inclined ways. Ground table-surfaces. Fences adjustable to 4 in. MODEL £10.0

Motorised, £18/10/0. 6 in. MODEL £22/10/0. Motorised, £44/0/0. Send for Catalogues of other "Impetus" Products.

JOHN P.M.S. STEEL, Bingley, Yorks.

Phone: Bingley 255 (4 lines)

ELECTRICAL

Always Available! Large selection of new and used a.c. and d.c. motors all types and sizes up to 80 h.p. Also generators and converters, switching, transformers, electric hand tools. Exchanges.—VERNON SMITH LTD., 364/366, King Street, London, W.6. RIV. 3964.

New "Brush" Motor, 3 h.p., 400/440-3-50, 1,440 r.p.m. £10.—119, Kensington Avenue, Watford.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

W.3. Acom 8126.

Powerful, 24 volt, geared motors, series wound. Will run on a.c. or d.c., 24 volt intermittent rating, final speed approx. 75 r.p.m.; weight 3½ lb., size 4½" x 2½", approx. ¾ h.p.; light, powerful and compact. Ideal unit for food-mixers, hedgecutter, etc. Makers Du-more Co., U.S.A. Spur and gunmetal worm-wheel totally enclosed. Price £1 10s., post paid.

H. MIDDLETON,
639, Abbeydale Road, Sheffield, 7.

The engagement of persons answering these advertisements must be made through a Local Office of the Ministry of Labour or a Scheduled Employment Agency if the applicant is a man aged 18-64 inclusive or a woman aged 18-59 inclusive unless he or she or the employer is exempted from the provisions of the Notification of Vacancies Order, 1952.


SITUATIONS

JACKSONS RADIO SUPPLIES
163, Edgware Road, London, W.2

excellent motor for many uses ■ only 25/6 P. & P. 2/6.
Hundreds of Bargains in Radio and T.V. Components. Send Stamp for List.



for mixers, fans, models, etc. 12/6. P. & P. 1/6.

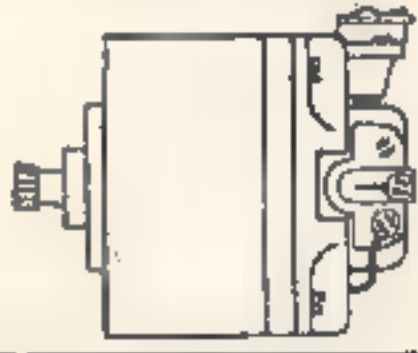

RENOWN 1363/4).

A.C. Motors. Special Offer. B.I.H.
Delco, etc., 200/250 volts, 1 phase, 50 cycles,
1,425 r.p.m. Capacitor induction: $\frac{1}{2}$ h.p.,
 $\frac{1}{4}$ to 25.6d.; 1/3 h.p., 75 7s. 6d.; $\frac{1}{2}$ h.p., re-
frigeration or capacitor induction, £7 7s. 6d.
—
JOHNSON ENGINEERING COMPANY, 319,
Kennington Road, S.E.11. Reliance 1412/3.
House Service Motors. 200-240 V.,
a.c. (or d.c.). Credit or prepayment type.—
UNIVERSAL Electric Co., 221, City Road,
London, E.C.1.
We Can Supply New ■ Reconditioned
motors and special plant. Our repair depart-
ment services all types of motors, generators,
alternators, $\frac{1}{2}$ to 100 h.p. First class work
at competitive prices and quick delivery.—
PHILIPS & SONS Electrical Ltd., 40-42,
Waterford Road, London, S.W.6. (Tel.: 4-12)

GENERAL

"TV Without Mains. AC/DC self starting "Chorehorse" generator. As supplied to A.V.C. D.C. output available for lighting, will also run small tools, etc. £47 10s., plus 10s. delivery.—Below.

Storage Batteries, approx. 1/3 list, 12 V, 75 AH heavy duty, 19 plates, separate cells in hardwood cases, finest possible specification, £7 17s. 6d., delivery 9s. 6d. 12V, 22 AH almost similar specification, surprising power! £3 12s. 6d., delivery 7s. 6d. 6 V, 90 AH, 15 plates, hard rubber cells, also suitable for cars, tractors, lorries, etc. £3 7s. 6d., delivery 7s. 6d.—Below.

Chargers 10 amp, 12/24 or 24 V. Heavy duty selenium metal rectifiers. Input 220/250 V, a.c., fullest adjustments on both sides. £12 7s. 6d., delivery 10s.—Below.

D.C. Motors, Fans, etc. Mains voltage ½ h.p. to 10 h.p. Approx. 75 per cent. below list.—Below.

Dynamos 24 V., 50 A., £3 10s., delivery 7s. 6d. Also cut-outs, volt ammeters, pulleys etc.—Below.

Air Compressors.—Hydraulic single cylinder two-stage 2½ cu. ft., 800 lb., £5 17s. 6d., delivery 3s. 6d. Reaveil or Bloom & Wade, 00 lb., 32 cu. ft. or 400 lb. 12 cu. ft., both £27 10s., delivery 20s. Complete mobile compressor plants from £69 10s. to £85 at works. Air storage tanks from £1 2s. 6d., and other air accessories.—Teddington Engineering Co. Ltd., Dept. "G," High St., Teddington, Middx.

PORTASS 5½" 24 speed Gearbox Lathes in two lengths Cast Iron Tray Pedestals. Dept. M.E. C. PORTASS & SON, Buttermere, Works, Sheffield 8 Stamp please

Watch and Clock Lathes, cleaning machines, staking tools, etc. (Easy payment terms arranged for purchases of £20 or over). Large illustrated catalogue, 1s. 6d. p.p. Price list 1s. p.p.—John Morris (CLERKENWELL) LTD., 64, Clerkenwell Road, London, E.C.1. **Build Your Own Refrigerator, all components available at reasonable prices. Fridge "Flowing Cold" units, £5, small single-cylinder units, Kelvinator, etc., £4; ½ h.p. heavy duty motors, £3; Chrome cabinet fittings, new, £1 set. Money back guarantee. S.A.E. for lists and schematic diagram.—Waterhouse, 1, The Grove, Isleworth, Middx. Phone: Hounslow 7558. "The Chronicles of a Country Works," by Ronald H. Clark, mint condition, 50s.—3, Darwin Road, Noel Park, N.22. **Experienced Turner with well-equipped home workshop, 5" lathe, underlakes spare time work, parts made to instructions, castings machined.—Bishop, 29, Burlington Road, Bristol 6. **Soho ½ Plate Reflex, 3 d.d.s., 3½ x 2½ adaptors, £2.9, 8½, £4.5, 5½, £5.6, 14, studio stand, enlarger (7" condenser), print dryer, lighting, processing equipment, complete outfit, offers?—Gage, Pen-Tor, Park Corner, Penzance. **Bellows for Cameras and enlargers made to your specification. Stamp for stock list.—Clement Wain Ltd., Newcastle, Staffordshire. **"Spraying Handbook" 1950 ed. Car, caravan, industrial, domestic stoving, flock leather spraying.—8s. 6d., post free.—Leonard Brooks, 23, Harold Wood, Romford. **Workers, Either Sex, full and spare time, required to make up simple Presta-plasta novelties at home; experience unnecessary; good rates, stamped addressed envelope.—Prestalasta Products (M.E.), BCM/125, London.************

item list, 14d.—Rogers, 2, Matlock Avenue,
Compressors, Races, Materials, 30v—
Southport.
—M.B.s " 14 Vols. 1946-1952, two
copies 1946 missing. 3s. volume, 65s. lot—
Hunter, 164, Osidge Lane, London, N.14,
For Sale. "Model Engineer," vol. 101
and 102, bound, 22s. the two.—Long,
25, Thistlemoor Road, Peterborough.
Bright and Black Mild Steel, brass
rods. Over 80 sections in stock. S.A.B.
for list.—B. J. Harris, The Cottage,
Cromeraves Hall, Cradley Heath, Staffs.
Ex M.O.S. Gear Wheels, Spur-mitre
bevel and worms. P.C. for list.—G. Pointer,
3, Buckminster Gardens, Grantham.

LOW STOCK

"ZYTO 12" LATHE
MYFORD LATHE
"ZYTO 16" LATHE
BOXFORD LATHE
HARRISON LATHE
ETC, ETC.

at lowest prices or ■ more convenient
by extended payments.
Ross & Alexander (London) Ltd.
165-167 Bishopsgate, London, E.C.2

Oh! by the way, apart from lathes
■ have large stocks of drilling machines,
electric tools, motors, in fact everything
in machines and hand tools for the model
engineer.

If you should happen to be in London
please give us a call.


Wanted. Perkins P. 6, age unimportant, block, head, crankshaft, must be sound, reply—Bird, Hadrians Camp, Carlisle. 26191.

Sale. Webster Chicago 3-speed record player, autotune, "Timbers," Cookney o.n.o.—Welland, 710 Hill, Reading.

Compressors for Sale. Twin pistons complete with air receiver, driving wheel, and motor cradle, 180 lb., 2½ cu. ft., price £3. Also ■ cu. ft. compressor only; £5. Motors, a.c. and d.c., all types, ½ h.p., £3. Cartage forward.—Wheat House, 1, The Grove, Isleworth, Middx. Phone: Hounslow 7558.

REAL BARGAINS

Steel Tool Cabinets
■ drawer, each 8' x
4' front, view and
18" front to back,
■ 48. 0d, each
paid, or 82 7s.
6d, each cart. paid
and painted.
Also, five drawer
Zinitex Steel Tool
Cabinets, Drawer
front 8' x 17"
and 7" to back.
Complete with one
Pounds' worth of
Nuts, Bolts, Washers,
Taper Pins, Springs,
etc. 17s. 6d, cart.
paid or Tool Cabinet
only 11s. 6d. cart paid.
100,000 Drill Buses, new,
Hardened
■ d Ground Tool Steel 1s. each, discount
for 100 or over.
Cheques, Cash ■ C.O.D.
E. HUNTINGTON
108c, Linaker Street, Southport
Phone : 55883
Return if not satisfied.

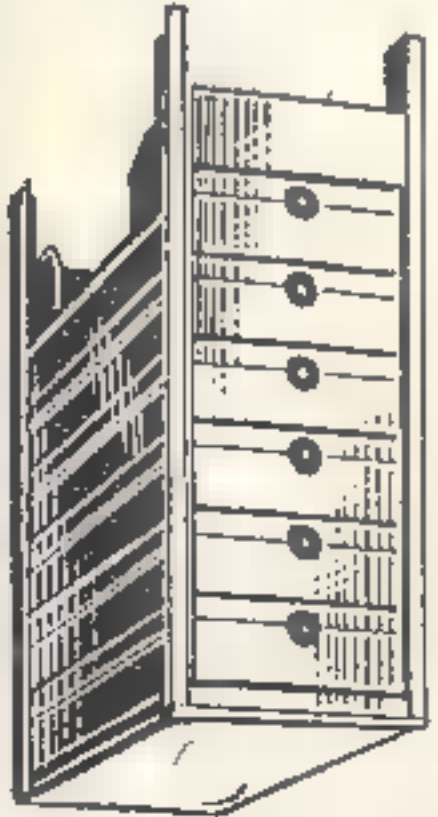

Compressor equipment, miscellaneous items, etc. Catalogue 14d.—PRYCE, 157, Malden Road, Cheam.
Machine Engraving, metal or plastic. Nameplates, dials and scales to drawing or sketch. Also light engineering. Keen prices and quick delivery.—Box No. 7029, Model Engineer Offices.




RECORD TOOLS

for

QUALITY

and

SERVICE

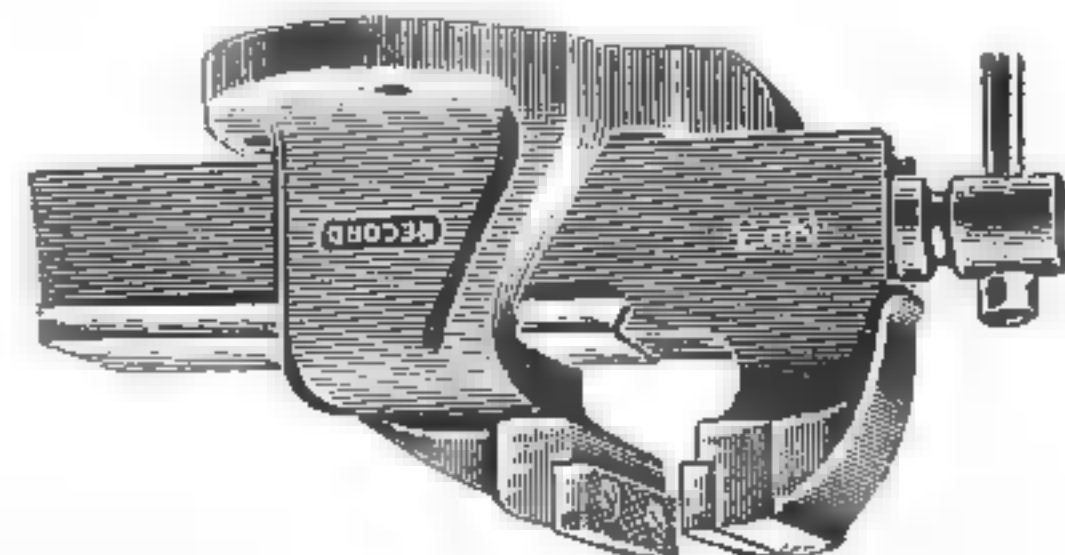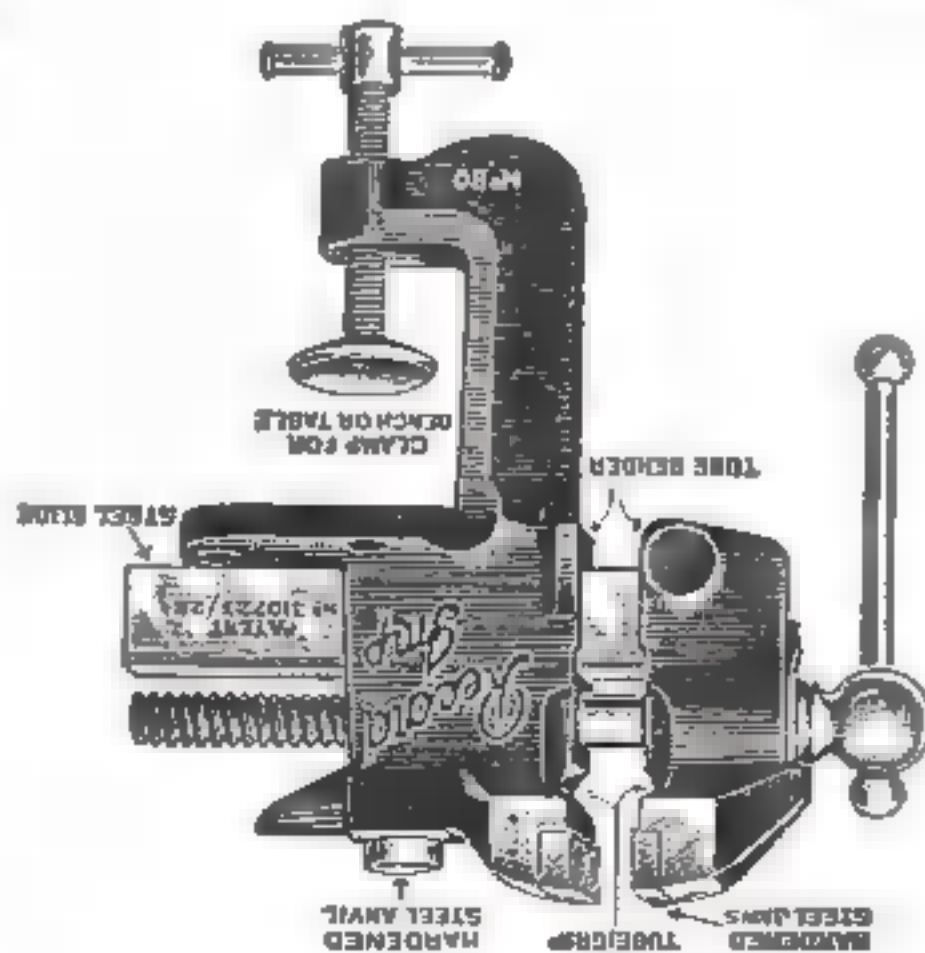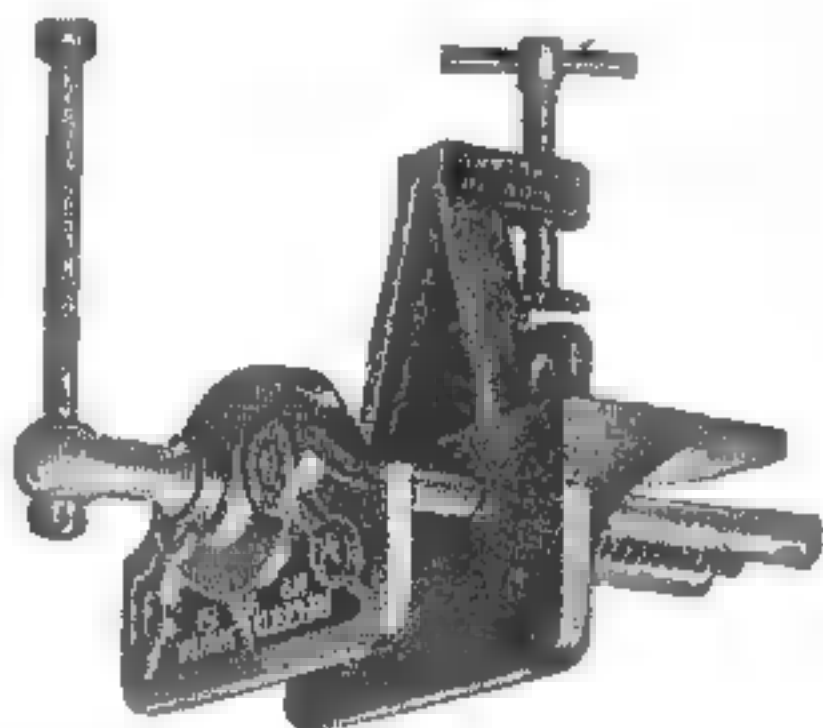

Write for Pocket Catalogue showing the full range of RECORD TOOLS for Wood and Metalwork

Manufacturers:

C. & J. HAMPTON, LIMITED
RECORD TOOL WORKS,
SHEFFIELD - ENGLAND

Obtainable from your usual Tool Dealer.

Handier than . . . Handiest

Our Flamemaster Mark I had a reputation for being the handiest tool of its kind in the world. We agreed . . . It was . . . But that did not mean that we could not make it handier still, so:


We added an inch to the length of the neck because we found that this improved the balance . . . We changed the pressed body to an aluminium die-casting to give more strength and longer service . . .

We adapted the maxiflame jet to burn propane and methane (natural gas) as well as butane and coal gas—and fitted it as standard.

We improved the pilot jet adjustment so that there was not the slightest sign of leakage even on really high pressure.

Here, then, is your tool for brazing, glassworking, hard soldering, leadburning and any other job where controlled flame heating is required. The built-in economiser, the interchangeable flame-units, the oxygen-air mixer, as well as all the attachments that were available with the Mark I remain. That's the Flamemaster Mark II, the handiest torch there is.

FLAMEMASTER MARK II

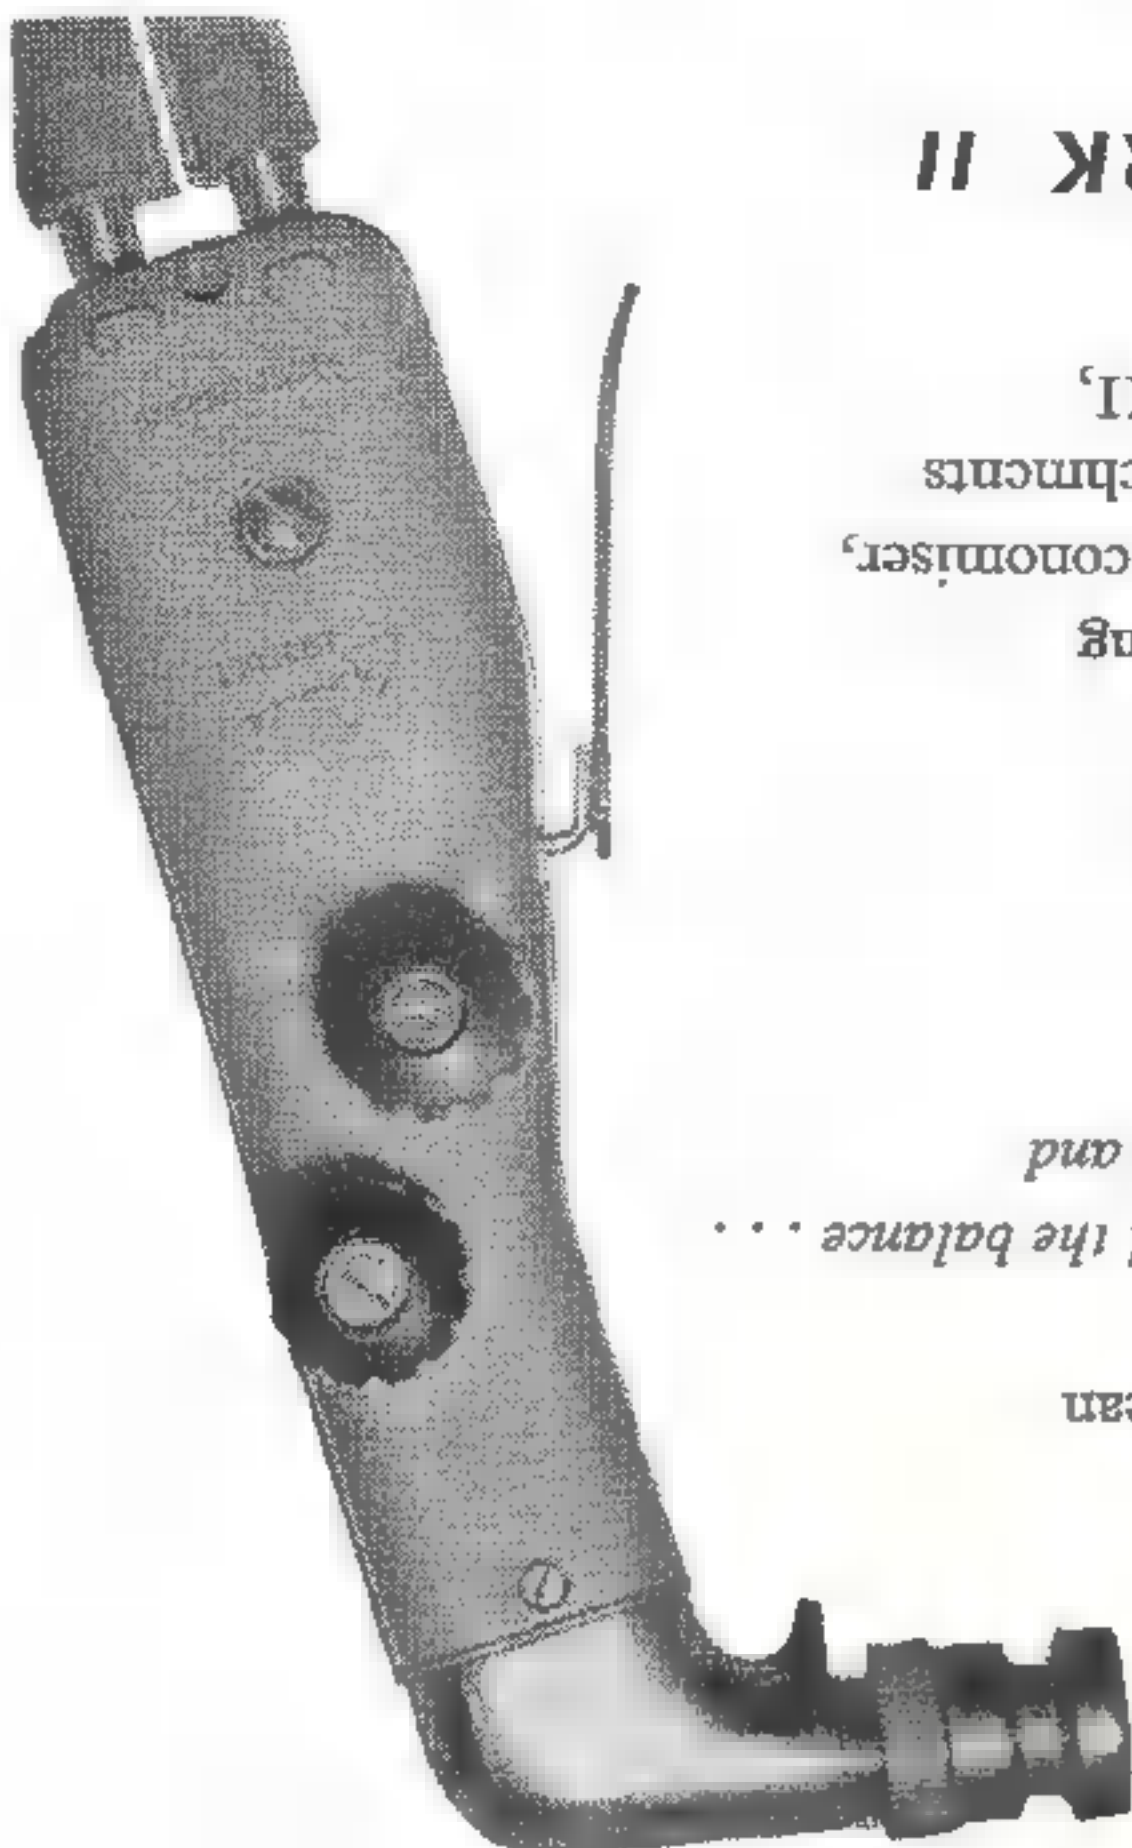

CHANCE BROTHERS LIMITED, Dept. F21, Lighthouse Works, Smetwick 40, Birmingham.
Telephone: West Bromwich 1824. London Office: 28 St. James's Square, S.W.1. Telephone: Whitehall 6002.

HUDDESFIELD • ENGLAND



★ An exclusive Brook offer . . . choice of ball sleeve bearings . . . no extra cost!

An economical power unit for light industrial or domestic applications. Single, two and three phase types at 2,850; 1,420 or 940 r.p.m. — Foot, flange or resilient mounting.

A STURDY RELIABLE FRACTIONAL WITH IMPROVED STANDARDS OF ELECTRICAL AND MECHANICAL PERFORMANCE

Meet the BROOK GRYPHON

Table VII. Commercial Forms of Solder

Type	Size		Flux incorporated	Chief application and remarks
	Length	Section		
Bars (plumbers' sticks)	12" approx.	1 1/4" x 1/8" approx.	None	Plumbers' solder approx. 1 lb. in weight, for wiped joints, etc.
Body solder	By weight		—	Coachwork (metal) repairs
Ingots	By weight		None	Solders for dipping baths
Sticks (tinman's)	16" approx.	Rhomboid 1/2" wide	None	Approx. 4-8 ounces
Scrip	24"	D 1" wide (approx.)	None	For blowpipe work weight 8 ounces approx
Wire	Spooled (see table) or carded	12-18 s.w.g. usual. Also finer gauges	None	General purpose light work
Cored	Spooled (see table) or carded	Wire 10 s.w.g. upwards	Non-corrosive* resin	Electrical and instrument work
Tape	Carded or spooled	1/8" wide	Non-corrosive† resin	General household work, mass production assembly, etc., melted by match
Foil	Spooled or Sheet	.005 in. average	None	Mass production work, oven soldering small assemblies
Powder	—	—	Powder Sal-ammoniac (usual)	Consists either of powdered tin or solder plus solid (powdered) flux
Paste	—	—	Corrosive or Non-corrosive	Consists either of powdered tin or solder suspended in liquid or paste flux

* Incorporated as cores within wire section. † Incorporated as cores within section.
NOTE.—The flux content of "cored" solders normally averages between 2.5 and 3.5 per cent, by weight, if flux is of activated type. A higher proportion is necessary with non-activated fluxes.

Table VIII. Length per lb.—Wire Solders

Wire size	Solder (Tin/Lead proportions)					
	Diameter	60/40	50/50	45/55	40/60	30/70
s.w.g.						
10	.128 in.	24.5 ft.	23.5 ft.	23.25 ft.	22.75 ft.	21.5 ft.
12	.104	37.25	37.25	35.25	34.5	32.75
13	.092	47.5	45.5	45	44	42
14	.080	62.75	60.25	59.5	58	55
16	.064	98	94.25	93	91	86.5
18	.048	174.5	167	165	161	154
19	.040	250	241	238	232	221
20	.036	310	298	294	287	273
22	.028	512	492	486	474	452

E.G.—One pound of 14 s.w.g. wire solder (60/40) is equivalent to 62 ft. 9 in. length.

THE DATA SUPPLEMENT
MODEL ENGINEER

Solders and Soldering

THIS supplement does not set out to describe the mechanics of soldering or how to go about making soldered joints, since it is assumed that the average model engineer is already well acquainted with the technique involved. It does, however, summarise a considerable amount of practical data on solders, fluxes and their applications and explain a number of points which may not be common knowledge.

The range of available soft solders is a considerable one. The "general purpose" solders have normally a tin content of between 40 and 50 per cent. A solder with a slightly higher tin content (60 per cent.) is used for most electrical work. The difference in the properties of these particular alloys is not great and it is only where mass production of soldered assemblies is involved that we find marked preferences for one alloy or the other.

The chief advantage of a 60/40 tin/lead solder, for example, is its relatively low melting point. However, since the cost of tin is some six times greater than that of lead, some manufacturing concerns may consider it expedient to use, say, a 40/60 tin/lead solder for electrical connections. The use of such an alloy is, in fact, standard in the American radio and television industry.

Whilst the choice of solder for general purpose work is seldom critical, certainly soldering is that much easier if a low melting point solder can be used. On the other hand, using a special low melting point solder (some of which will melt in boiling water) it must be expected that even a moderate rise in service temperature may affect the strength of the joint to a serious degree.

Another point to bear in mind in selecting solders for any particular job is that antimonial solders offer certain advantages for particular classes of work but are definitely harmful in other cases. For preference, therefore, the solder selected for miscellaneous duties in the home workshop should be of the non-antimonial general purpose type.

Besides the variety of different solder alloys, commercial solders are also available in a number of different forms, ranging from ingots of several pounds in weight (used principally for melting down for dipping baths) down to wire as fine as 36-s.w.g. in diameter size and flat tape or foil down to 1/8 in. in width. Common forms are listed in Table VIII. In addition numerous solder preforms, solder washers and rings, etc., are made for mass production applications. There are also a comparable number of different brands and types of commercial fluxes available, nearly all of which fall into the flux categories listed in Table V, on which data a selection can be made of the most suitable type of flux (or fluxes) for the job under consideration. Most "general purpose" soldering can be covered by the use of "cored" solders incorporating the necessary flux with the solder.

Soldering Technique

THE basic technique of soldering may be said to consist of properly fitting the parts to be joined so that the space between them is sufficiently narrow to attract and retain the molten solder, making sure that the parts themselves are thoroughly clean and ready for soldering (e.g. pre-tinned); employing the right kind of flux, a suitable solder for the job together with a suitable iron or means of raising both the solder and the immediate area of the surfaces to be joined to the correct temperature.

A majority of soldering jobs in the home workshop are done with soldering irons and the electric iron is undoubtedly more widely favoured than irons which have to be heated by independent means. Apart from dirty joints, a majority of soldering troubles arise from the use of too low a bit temperature, so that the solder is not properly melted. Except for eutectic alloy compositions (which are normally used only for the low melting point solders), all solders melt in two stages on heating. On reaching a certain temperature the solder begins to melt, so that it becomes plastic or pasty. Unless there is adequate heat to raise the temperature still further to the point at which the solder melts completely a poor joint must inevitably result. For good work it is normally recommended that the bit temperature should be about 40 deg. C. higher than the temperature at which the solder alloy melts completely.

It is difficult, or even impossible, to gauge the bit temperature of an iron, nor is this particular data normally given by manufacturers in quoting the performance of an electric iron. It is, therefore, necessary to judge whether or not an iron is hot enough by experience in the manner in which it makes the solder "flow." Electric irons are certainly more convenient for small installation and assembly work, and in particular for making soldered electrical connections, but there is still much to be said for the use of indirectly heated irons for larger mechanical joints in steels, etc. Due consideration must, of course, be given to the possibility of heat damage to adjacent components if too hot an iron is employed, or if a large, hot bit is held against the joint for an appreciable period of time, as much of this heat will be conducted away by the surrounding metal.

Cleaning and degreasing play an important part in soldering. Mechanical cleaning of the parts to be soldered, by scratch brush, emery paper, filing, or even glasspapering is most effective. If the part is handled before soldering, degreasing may be necessary. Usually this can be done quite satisfactorily by swabbing over with a detergent wash, followed by rinsing under running water. Swabbing with a more powerful degreasing agent, such as an alkali type degreasing fluid or trichlorethylene may be necessary in bad cases of grease soiling.

If the type of flux used is in any way corrosive, adequate cleaning after soldering is also essential. Particularly in the case of steels, strong acid fluxes are frequently employed which should be neutralised as soon as possible after soldering by dipping or washing in an alkaline solution. Scratch brushing or similar mechanical cleaning may also be necessary to remove encrusted deposits of fused flux.

Special Techniques

WHILST some metals are markedly more difficult to solder than others, and some indeed are impossible to joint in this way, many of the so-called "difficult" metals are readily responsive to a certain type of flux and solder and possibly slightly modified technique. It is not commonly appreciated, for instance, that satisfactory soldered joints can be made to many plated surfaces, provided that the surface coating itself is sufficiently rigid or well bonded to the underlying parent metal.

A typical list of recommendations is given in the following table of which only aluminium and aluminium bronze may prove to be outside the scope of average "amateur" work. The recommendations for alloy steels are, of course, of a general nature due to the immense variety of compositions met with.

Table VI. Difficult Metals to Solder

Metal	Recommended flux (proportions in brackets)	Recommended solder	Special treatment
Aluminium†	Air-excluding* flux (2) Phosphoric acid plus (1) Nitric acid	70/30 Tin/Zinc	Soldering temperature 400° C. Can be used for tinning
Aluminium Bronze	(1) Hydrochloric acid (1) Killed spirits	Tin/Zinc	High soldering temperature
Beryllium Copper	Resin or Lactic acids	Ordinary	Ordinary†
Bronze	Ordinary	60/40 Tin/Lead	Ordinary†
"Alloy" Brasses	Zinc Chloride	60/40 or 50/50 Tin/Lead	Antimonial solders should be avoided
Cast iron	Zinc Chloride	Ordinary	Effective mechanical cleaning necessary.
Gunmetal	Ordinary	60/40 Tin/Lead	Ordinary†
Alloy Steels	Hydrochloric acid or Zinc Chloride	Ordinary	Pickle in Nitric acid and dip in Hydrochloric acid before tinning
Stainless Steels	(1) Hydrochloric acid (1) Zinc Chloride	Ordinary	—
Cadmium plated Surfaces	Resin types	Ordinary	Excellent soldering characteristics
Chromium plated Surfaces	Zinc Chloride	60/40 Tin	Ordinary†
Silver Plated Surfaces	Non-corrosive resin (liquid)	Low melting point solders preferred	Very thin plated coatings removed by solution on soldering

* Normally based on Sodium Chloride, Potassium Chloride and Lithium Chloride.
† See table iv. ‡ More readily solderable with ultrasonic soldering iron. § Corrosive

Fluxes

METALS such as tin, copper, brass and, to a lesser extent, iron and mild-steels are readily solderable with a variety of fluxes. Prior to the advent of activated resin fluxes it was common practice to use an acid-base (corrosive) flux where positive fluxing action was important, cleaning after jointing to remove the corrosive elements.

By the addition of suitable activators, the modern non-corrosive resin fluxes have a comparative performance in many instances, thus reducing the importance of cleaning. It should be noted, however, that some activated resin fluxes are of the corrosive type and where it is essential to employ a non-corrosive flux the type of flux must be chosen carefully. Non-corrosive fluxes are invariably employed in soldering up electrical connections, and in fine instrument work. If necessary, mechanical cleaning of the components concerned should precede soldering.

The fluxing action of many of the corrosive fluxes (particularly a mixture of "fresh" and "killed" hydrochloric acid) may make it possible to produce sound joints on "dirty" surfaces, but this is a practice not to be encouraged. The action of most of these liquid fluxes can be improved by the addition of a small proportion of wetting agent.

Table V. Soldering Fluxes

Name	Form	Application	Remarks
Hydrochloric Acid	Liquid	Soldering zinc	More effective than "killed spirit" acid
Hydrochloric Acid plus Zinc Chloride	Liquid	Flux for stainless steel.	50-50 "fresh" and "killed" acid
Zinc Chloride	Liquid	Good general purpose flux	Killed "hydrochloric acid"
Zinc Chloride plus Ammonium Chloride Ammonium Chloride	Liquid	Good general purpose flux	Lower fusion point than zinc chloride
Phosphoric Acid Borax	Liquid Solid	General purpose	Less effective and less corrosive than above
Tallow	Solid	Steel, copper, brass iron or steel	Normally non-corrosive
Resin	Solid	Lead	Used in plumbed joints
Activated Resin*	Solid or Liquid	Lead, tinned iron	Also as liquid flux in alcohol solution
Resin paste	Paste†	Tinned steel, copper, brass	Improved fluxing action
Self-neutralising (Aqueous)	Liquid	Lead, iron, tinned steel, copper, brass	General purpose non-corrosive flux
		General purpose flux	Usually with activator*
			Hydrochloric acid base for good fluxing—incorporating self-neutralising agents

* Some activated resin fluxes may be corrosive.

† Corrosive paste fluxes are also available, based on hydrochloric acid.

The "wetting" characteristics of the solder also play a significant part in many applications. In general, solders with a high or medium tin content possess the best "wetting" properties. For treating copper surfaces the most stable coatings are produced with solders having between 40 and 60 per cent. tin. Antimonial solders wet copper less readily than the non-antimonial types, although their performance may be adequate. They are not to be recommended for jointing brass and zinc coated parts due to the brittleness of antimony-zinc compounds formed.

The question of cooling the freshly soldered joint raises a number of interesting points. For maximum mechanical strength from the joint it is an advantage to cool the solder down to about 120 to 130 deg. as quickly as possible. This inhibits the formation of large, brittle crystals in the joint metal. However, rapid cooling may tend to promote localised contractions, causing unequal stresses within the joint and consequent reduction in overall strength.

It is considered that a quick dip in a water bath immediately the solder shows signs of becoming solid is advantageous, removing and leaving the assembly to cool right down in air. For most normal purposes, however, air cooling is quite satisfactory. Typical figures for the maximum mechanical strength which may be expected from soldered joints employing different types of solders are summarised in Table I.

Table I.

Maximum Strength of Soldered Joints

Solder	Tensile strength at room temp. (tons/sq. in.)	Tensile strength (tons/sq. in.) at				
		50° C.	75° C.	100° C.	125° C.	150° C.
Wood's Metal	1.6		0	—	—	—
Bismuth-Tin-Lead	2.6			0	—	—
Bismuth-Cadmium-Tin	3.9			0	—	—
Bismuth-Tin	4.3				0	—
Tin-Cadmium-Lead	3.4					0
Bismuth-Cadmium	3.3					0
Cadmium-Tin	4.2					
95/5 Tin/Lead	2.65	2.5	1.8	1.45	0.75	0.5
60/40 Tin/Lead	3.65	3.0	2.7	2.0	1.25	0.8
40/60 Tin/Lead	3.4	2.8	2.5	1.6	1.0	0.75
Tin-Lead-Silver:						
10-88-1.5	2.4					
20-78-2.0	2.5					
30-69-1.0	3.95					
30-66-75-1.25	3.63					

Types of Solders

WITHIN the range of so-called "soft" solders there are three basic groups of alloys, classified, respectively, as low melting point solders, soft solders and high temperature (or "hard" or high strength) solders. All are within the range of melting points readily achieved with normal soldering irons. The former are eutectic alloys of bismuth, lead, cadmium and tin in varying arrangements. Normal soft solders are tin-lead alloys, with or without the addition of small proportions of antimony. The range of solders giving greater strength and higher service temperatures are compounded from tin and lead with small proportions of silver, and possibly also antimony. One of the main advantages of an antimonial solder is that it has a higher creep strength than a corresponding non-antimonial solder. However, antimonial solders should not be used on brass or zinc since these metals tend to form a brittle compound with antimony, resulting in weak joints. True "silver solders" are quite distinct from the tin-lead-silvers mentioned and are not suitable for iron work. They have melting points of the order of 675 to 850 deg. C. and are normally fused with a blowpipe or similar apparatus.

With the range of soft solders, the point at which the solder just starts to melt (or solidifies completely on cooling) is the same (183 deg. C.) irrespective of the composition. This corresponds to the melting point of the eutectic tin-lead alloy (63 per cent. tin). However, differing proportions of the alloy result in a raising of the temperature at which the solder becomes *completely* liquid or reaches the liquidus state and corresponding bit temperatures required are noted in Tables II, III and IV.

Low melting point solders are used where it is necessary to use only low soldering temperatures. The mechanical strength of these soldered joints is lower than those achieved with ordinary soft solders, which in turn are lower than the strength of tin-lead-solder joints at higher temperatures. It must also be remembered that the cold strength decreases quite appreciably as the service temperature rises until, as the eutectic temperature of the alloy is approached, the loss of strength becomes even more sharply marked. Some typical strength figures are summarised in Table I.

Table II. Low Melting Point Solders

Eutectic alloy composition	Melting point solidus and liquidus °C.	Bit temperature °C.	Remarks
Bismuth-Lead-Cadmium-Tin (Wood's metal)	70	100	Good low temp. solder
Bismuth-Lead-Tin ...	95	125	Used with activated flux
Bismuth-Cadmium-Tin ...	103	140	Used with activated flux
Bismuth-Tin ...	138	175	Good solder
Tin-Cadmium-Lead ...	142	180	Excellent solder
Bismuth-Cadmium ...	144	184	Good solder
Cadmium-Tin ...	177	217	Good solder

PAGE FOUR

Table III. Tin-Lead-Silver Solders

Composition (%)				Melting temperature liquidus °C.		Bit temperature required °C.
Tin	Lead	Silver	Antimony			
10	88	1.5	0.5	290		330
20	78	2.0	—	290		330
20	77.25	1.25	1.5	260		300
30	69	1.0	—	251		291
30	66.75	1.25	2.0	249		289
30	68.25	1.25	0.5	247		287

Table IV. Soft Solders

(Tin/Lead Solders—British Standard 219 : 1949)

Grade	% tin	Antimony content %	Melting temp. liquidus °C.	Bit temp. required °C.	Applications
—	100	—	232	272	Pre-tinning
E	95	—	223	263	Electrical work
A	65	1.0 max.	186	226	Mechanical joints
K	60	0.5 max.	189	229	Electrical and tinmich's
F	50	0.5 max.	214	254	General purpose
B	50	2.5-3.0	203	243	General purpose
M	45	2.3-2.7	215	245	General purpose
G	42	0.4 max.	232	272	Dip galvanising
C	40	2.0-2.4	228	268	General purpose
H	35	0.3 max.	246	286	Wiped joints
L	32	1.6-1.9	245	285	Wiped joints
J	30	0.3 max.	255	295	Wiped joints and dipping
D	30	1.0-1.7	248	288	Wiped joints
N	18.5	7.5-1.0	275	315	Dipping solder

NOTE:—Grades A, E, F, G, H, J and K are non-antimonial solders. Grades B, C, D, L and M are antimonial solders.

PAGE FIVE